
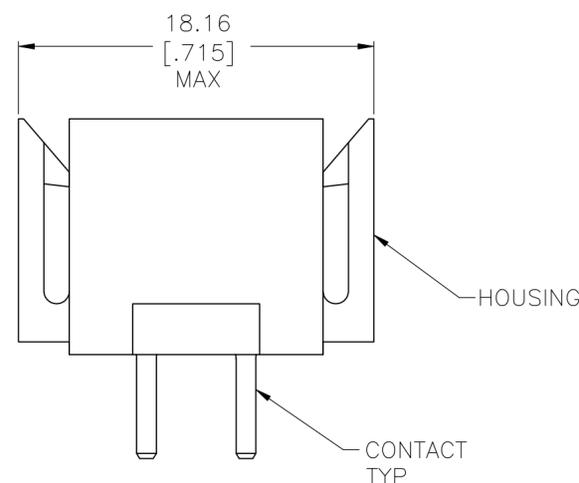
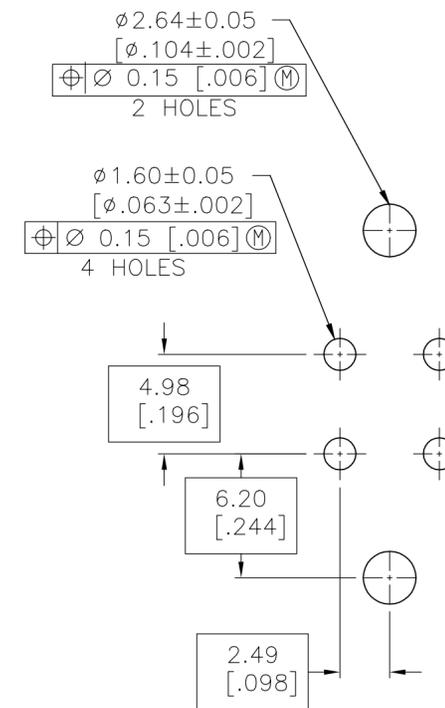
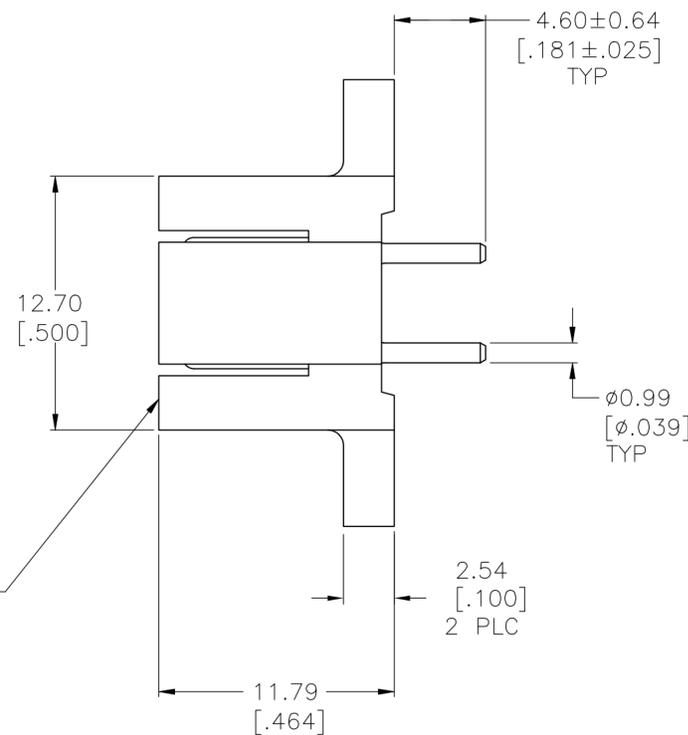


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
U		REVISED PER ECO-18-000437	18JAN2018	RS	MZ
V		REVISED PER ECO-18-012313	06AUG2018	RS	MZ

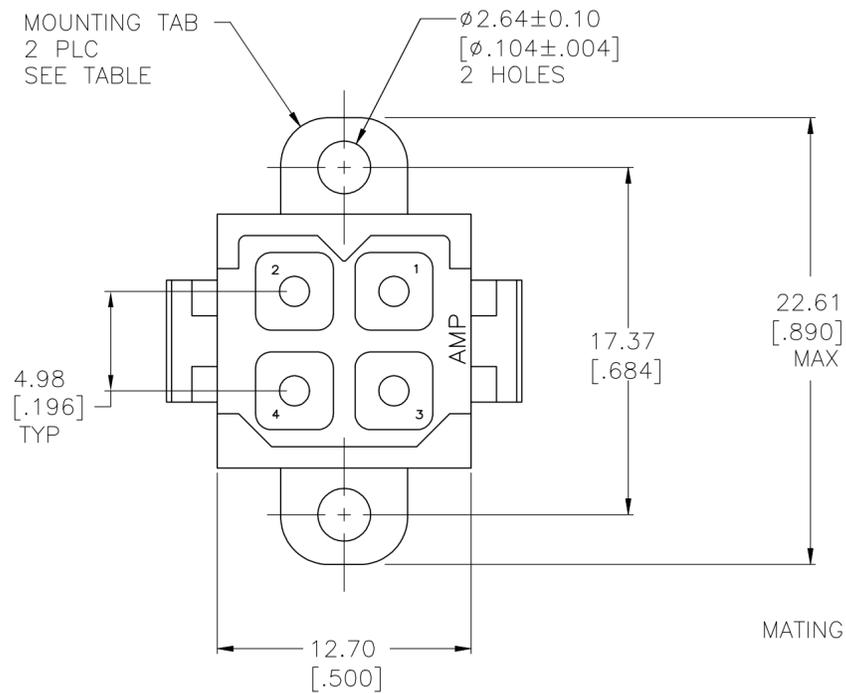

RECOMMENDED PC BOARD LAYOUT

- 1 NYLON, UL 94V-0 RATED, RED.
- 2 BRASS PER ASTM B36.
- 3 3.81 μ m [.000150] MIN TIN OVER 2.54 μ m [.000100] MIN COPPER.
- 4 0.76 μ m [.000030] MIN GOLD FOR A LENGTH OF 5.08 [.200] FROM MATING END, 3.81 μ m [.000150] MIN TIN FOR A LENGTH OF 4.83 [.190] MIN FROM OPPOSITE END, BOTH OVER 1.27 μ m [.000050] MIN NICKEL.
- 5 CONTACTS SELECT LOADED IN POSITIONS 2, 3 AND 4.
- 6 3.81 μ m [.000150] MIN TIN OVER 2.54 μ m [.000100] MIN COPPER.
- 7 0.76 μ m [.000030] MIN GOLD FOR A LENGTH OF 5.08 [.200] FROM MATING END, 3.81 μ m [.000150] MIN TIN FOR A LENGTH OF 4.83 [.190] MIN FROM OPPOSITE END, BOTH OVER 1.27 μ m [.000050] MIN NICKEL.
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

8/5	OBSOLETE	6	YES	1-207119-2
	OBSOLETE	7	NO	1-207119-1
		7	YES	1-207119-0
		6	NO	207119-9
		6	YES	207119-8
8/5	OBSOLETE	3	YES	207119-7
		4	NO	207119-4
	OBSOLETE	4	YES	207119-3
	OBSOLETE	3	NO	207119-2
	OBSOLETE	3	YES	207119-1
		CONTACT FINISH	MOUNTING TABS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L.SIPE 03/10/92	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK R.STONE 3-17-92	PIN HEADER ASSEMBLY, 4 POSITION, METRIMATE	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD -	NAME	
0 PLC \pm -		PRODUCT SPEC 108-10033	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
1 PLC \pm -		APPLICATION SPEC	A2 00779 C-207119	
2 PLC \pm 0.25 [.010]		WEIGHT -	SCALE 4:1 SHEET 1 of 1 REV V	
3 PLC \pm -		CUSTOMER DRAWING		
4 PLC \pm -				
ANGLES \pm -				
MATERIAL HOUSING: 1	FINISH CONTACT: SEE TABLE			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[207119-9](#)