

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1700714011](#)
Status: **Active**
Overview: High-Speed Pluggable I/O Solutions
Description: zSFP+ Stacked Ganged Assembly with Elastomeric Gasket, 2-by-4 with 4 Light Pipes, 160 Circuits

Documents:

3D Model	Application Specification AS-170071-0002-001 (PDF)
Drawing (PDF)	Test Summary TS-170071-0001-001 (PDF)
Product Specification PS-170071-0001 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification

UL E29179

General


Product Family	I/O Connectors
Series	170071
Application	Module-to-Board
Component Type	Receptacle
Electrical Model	Yes
Overview	High-Speed Pluggable I/O Solutions
Product Name	zSFP Plus, zSFP+
Type	N/A
UPC	884982402195

Physical

Circuits (Loaded)	160
Color - Resin	Black
Durability (mating cycles max)	100
Flammability	94V-0
Gender	Female
Lock to Mating Part	Yes
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Matte Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	98.604/g
Number of Rows	2
Orientation	Right Angle
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	2.36mm
Packaging Type	Tray
Panel Mount	No
Pitch - Mating Interface	0.80mm
Pitch - Termination Interface	0.80mm
Plating min - Mating	0.762µm
Plating min - Termination	0.762µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Ports	8
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +85°C
Termination Interface: Style	Through Hole - Compliant Pin

Electrical

Current - Maximum per Contact 0.5A

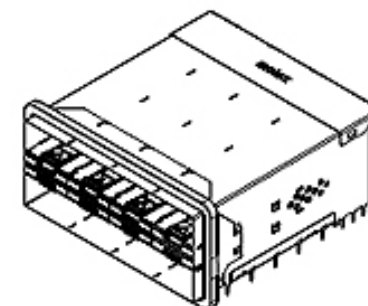

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - ED/71/2019 (16 July 2019)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[170071 Series](#)

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Stacked Multi-Port Extraction Tool, 2-by-4	622029940
2-by-4 SFP Stacked Multi-Port Insertion Tool	622030150

Shield Type	N/A
Shielded	Yes
Voltage - Maximum	30V AC

Solder Process Data

Lead-freeProcess Capability	N/A
-----------------------------	-----

Material Info**Reference - Drawing Numbers**

Application Specification	AS-170071-0002-001
Electrical Model Document	EE-170071-0001
Product Specification	PS-170071-0001
S-Parameter Model	SP-170426-1000
Sales Drawing	1700710002-000, SD-170071-0005-001
Symbol/Footprint Data	SYM-170071-0001
Test Summary	TS-170071-0001-001

This document was generated on 09/19/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[170071-4011](#)