
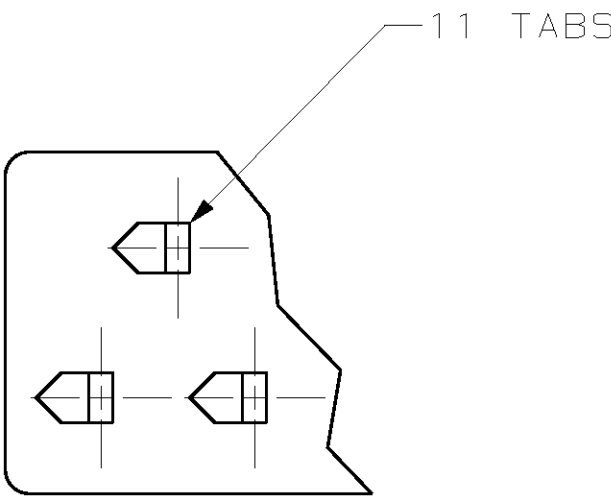
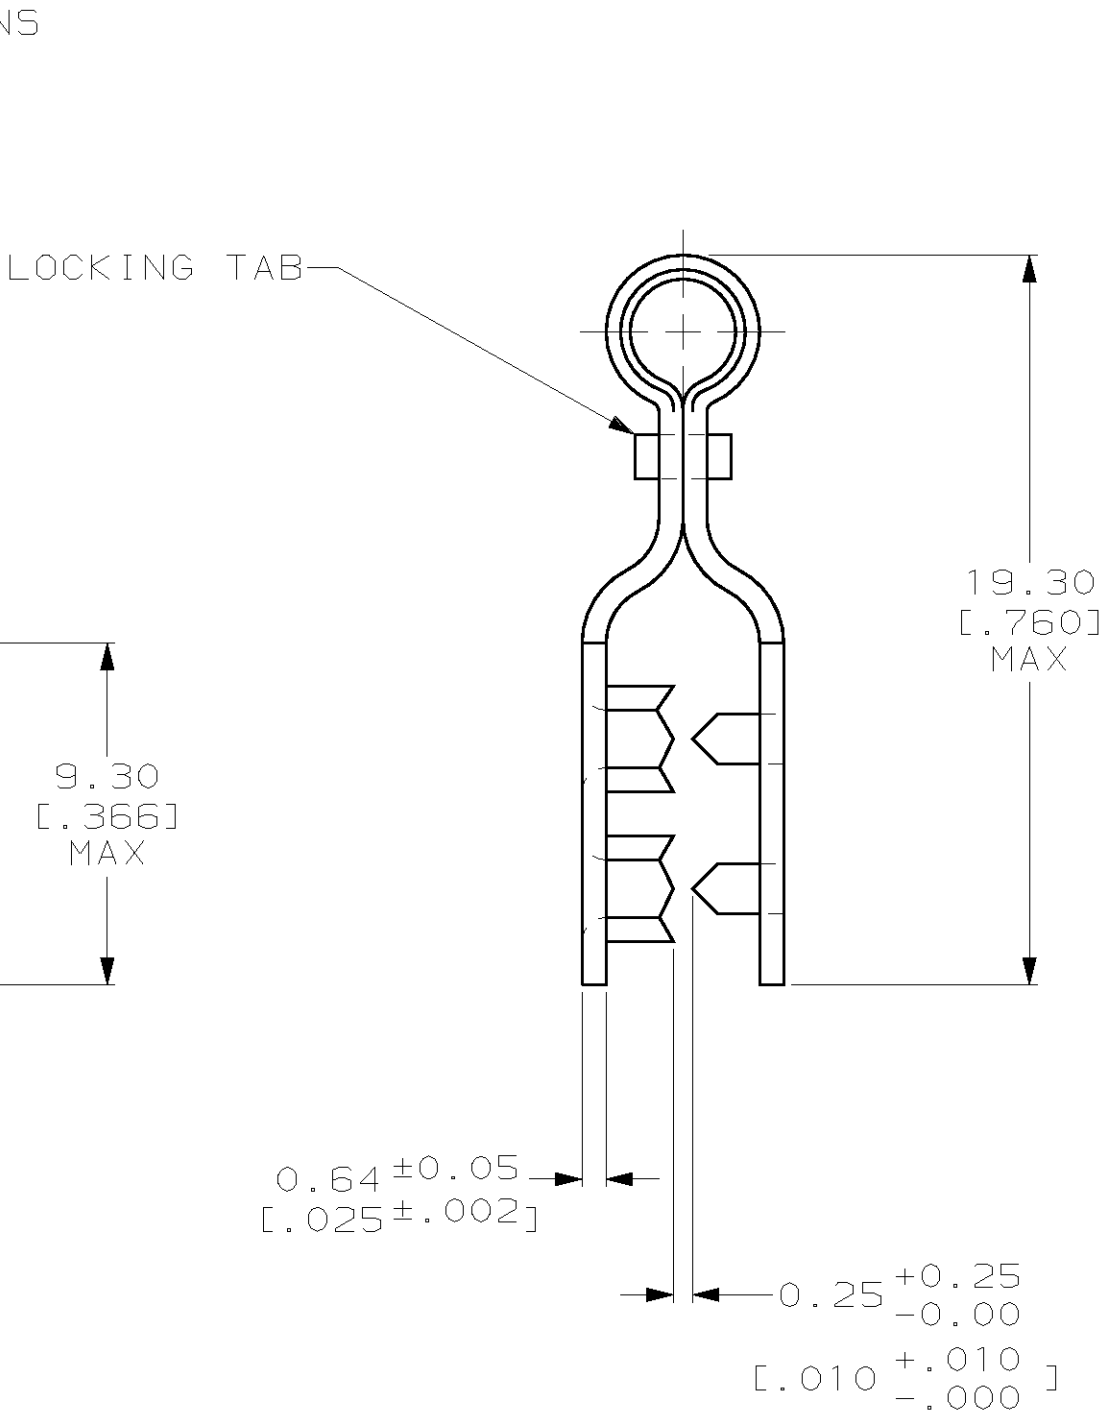


LOC	DIST	REVISIONS				
G	86	P	LTR	DESCRIPTION	DATE	DWN
		F		REVISED PER 0L20-0217-97	02DEC97	MJS

1 0.76[.030] MAX ALUMINUM FOIL THK

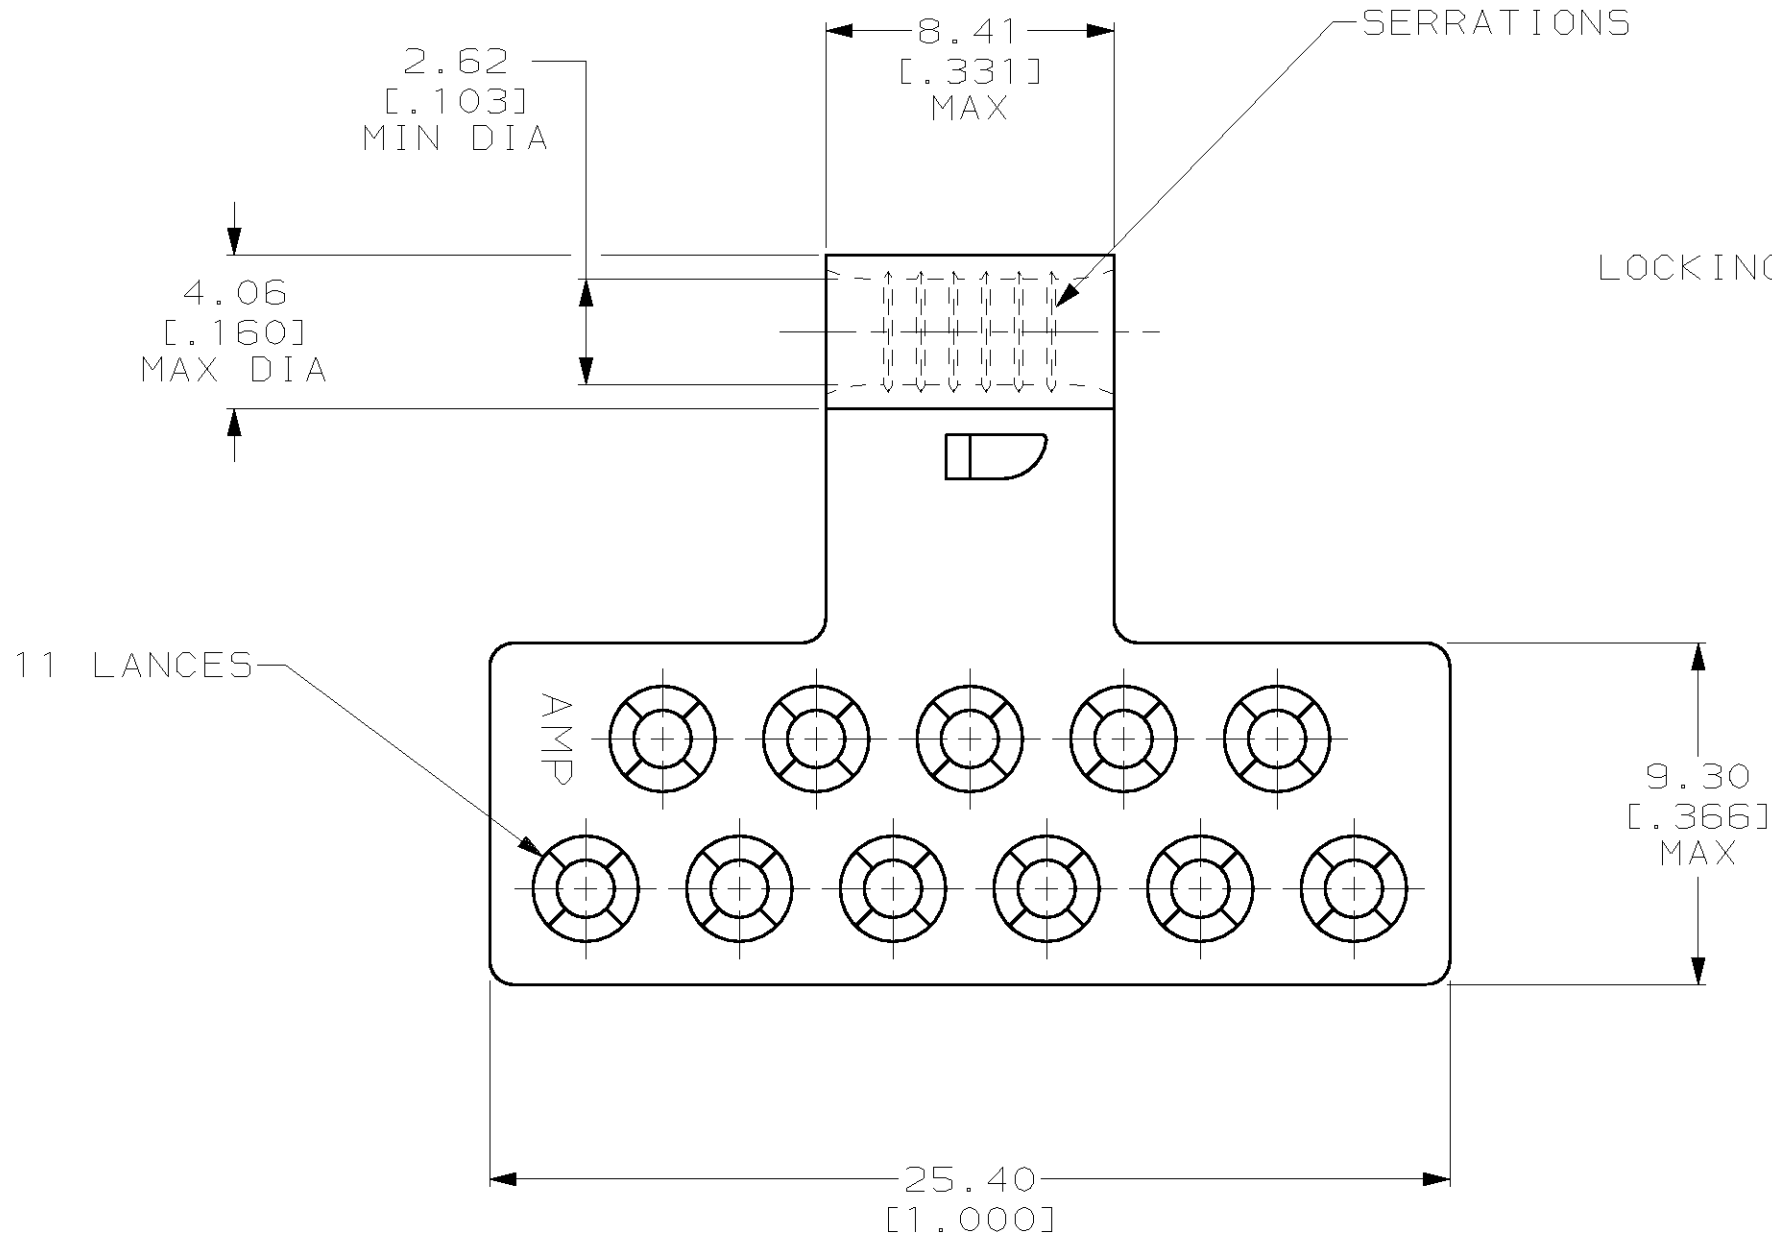

53264-2  
AMP  
PART NUMBER

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS				THIS DRAWING IS A CONTROLLED DOCUMENT.				<div>DWN DK SCHRUM 02DEC97</div> <div>CHK MJ SPICER 03DEC97</div> <div>APVD JL MECKLEY 03DEC97</div> <div>PRODUCT SPEC —</div> <div>APPLICATION SPEC —</div> <div>WEIGHT —</div> <div>CUSTOMER DRAWING</div>		<div><b>AMP</b> AMP Incorporated Harrisburg, PA 17105-3608</div> <div>NAME W/ BARREL, TAP, DOUBLE FACE, TERMI-FOIL™, WIRE SIZE: 18-12 AWG</div> <div><div>SIZE A2</div><div>CAGE CODE 00779</div><div>DRAWING NO C- 53264</div><div>RESTRICTED TO —</div></div> <div>SCALE 5:1</div> <div>SHEET 1 of 1</div> <div>REV F</div>			
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS		PRODUCT INFORMATION CENTER 1-800-522-6752		RECOMMENDED OPERATING TEMPERATURE: 150°C MAX		<div>DIMENSIONS: mm (INCHES)</div> <div></div>		<div>TOLERANCES UNLESS OTHERWISE SPECIFIED:</div> <div>0 PLC ±— 1 PLC ±— 2 PLC ±0.20 (.008) 3 PLC ±— 4 PLC ±— ANGLES ±—</div>					
FOR APPLICATION TOOLING INFORMATION		TOOLING ASSISTANCE CENTER 1-800-722-1111		VOLTAGE RATING: NOT APPLICABLE									
FOR ORDER ENTRY		1-800-526-5142		WIRE CROSS SECTIONAL AREA RANGE: 1.65-2.62mm² [3,260-5,180] CIR MILS SOLID OR STRANDED		MATERIAL COPPER PER ASTM B-152 ANNEALED		FINISH TIN PLATE 0.00254 [.000100] MIN THK PER ASTM B-545					

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[53264-2](#)