## NOTES:

I. MATERIALS AND FINISHES:

HEX NUT - BRASS, GOLD PLATING LOCK WASHER - BRASS, GOLD PLATING BODY - BRASS, GOLD PLATING

CONTACT - BERYLLIUM COPPER, GOLD PLATING

GASKET - SILICONE RUBBER, RED

INSULATOR - PTFE, NATURAL

2. ELECTRICAL:

A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: 0-18 GHz


C. VSWR (RETURN LOSS): 1.300 (-17.7 dB) MAX.


D. D.W.V: 1000 VRMS, MIN.

3. MECHANICAL:


A. DURABILITY: 500 CYCLES MIN. B. TEMPERATURE RANGE: -65°C TO +165°C

4. MAX. PANEL THICKNESS=4.3mm

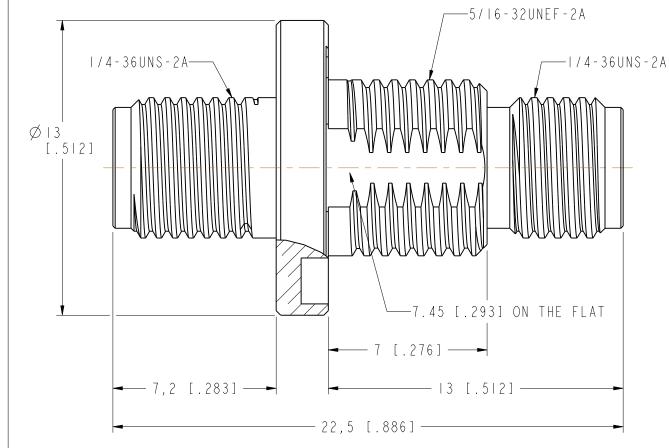

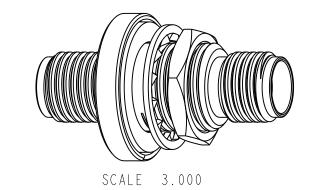



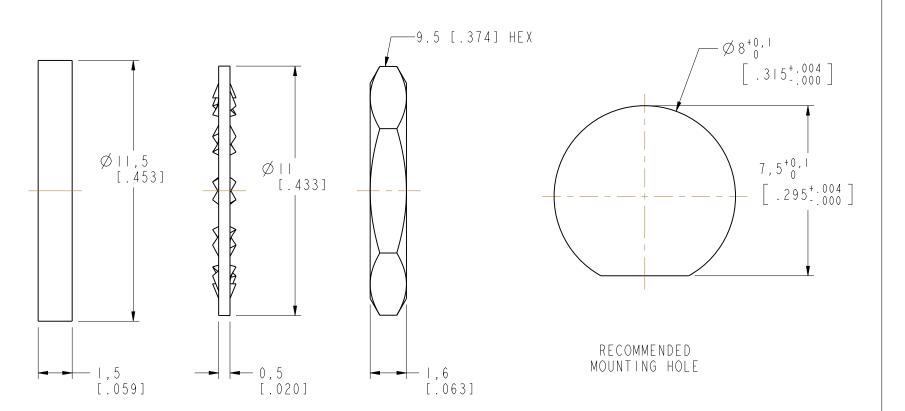

## **CUSTOMER OUTLINE DRAWING**

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:  <0.5mm  0.5 - 6mm  6 - 30mm  30 - 120mm  ANGLES  ± 0.05mm  ±0.1mm  ±0.2mm  ± 0.3mm  ±1°	MATERIAL _	DRAWN M.ZHANG	DATE 21-Jan-15	TITLE SMA BULKHEAD JACK	Amphenol
NOTICE - These drawings, specifications, or other data (I) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they		ENGINEER S.DUAN	DATE 21-Jan-15	TO JACK ADAPTER	Connex
are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is	REFERENCE SMA747IAI-3GT5GP-50	APPROVED	DATE		DRAWING NO.
not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	CONFIGURATION LEVEL: In Work		21-Jan-15	SCALE: 6.0:1.0 SHEET 3 OF 3	ITEM NO.
		CAD FILE		DWG SIZE REV	
arscrosed by said drawings, specifications, of other data.	FINISH			ВВВ	PART NO. 132170-10