

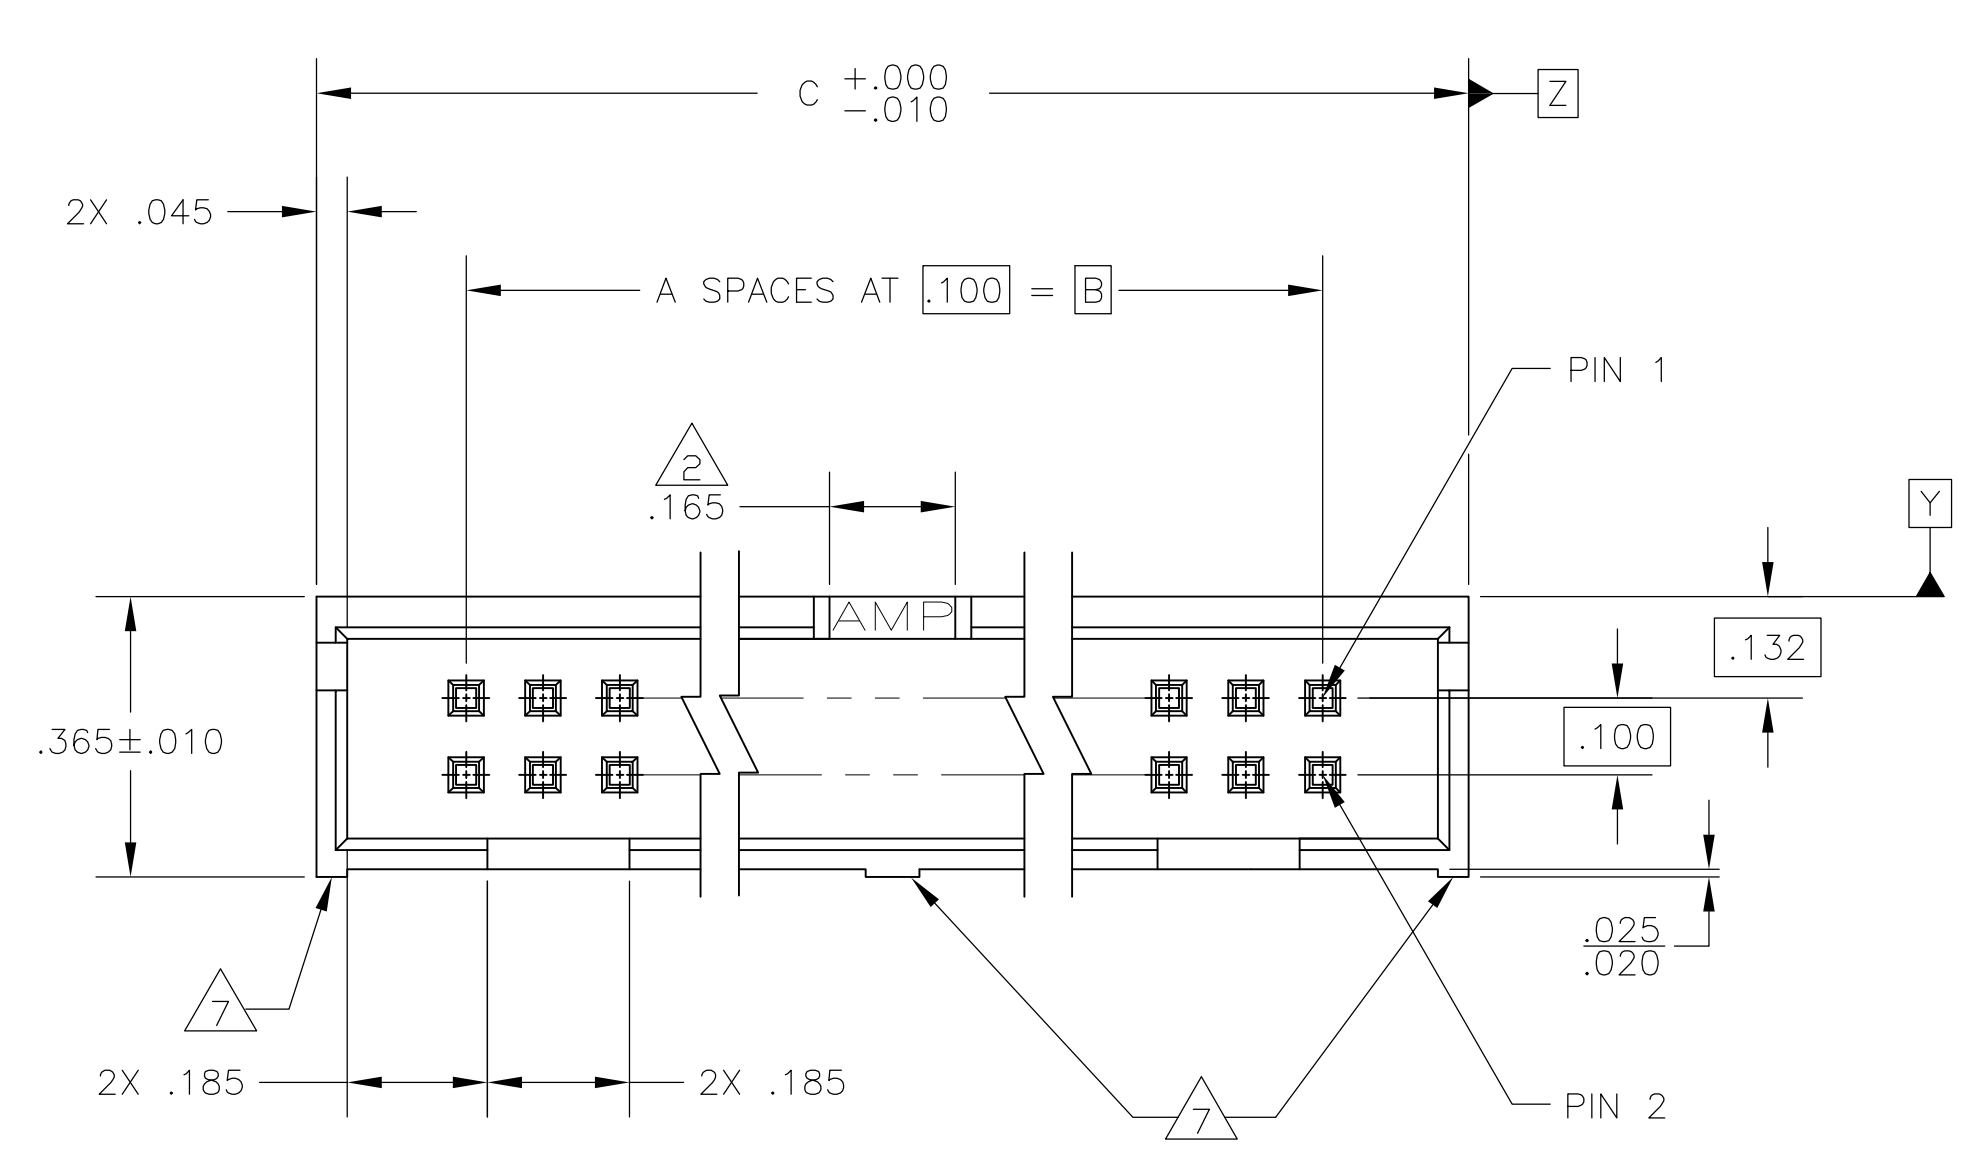
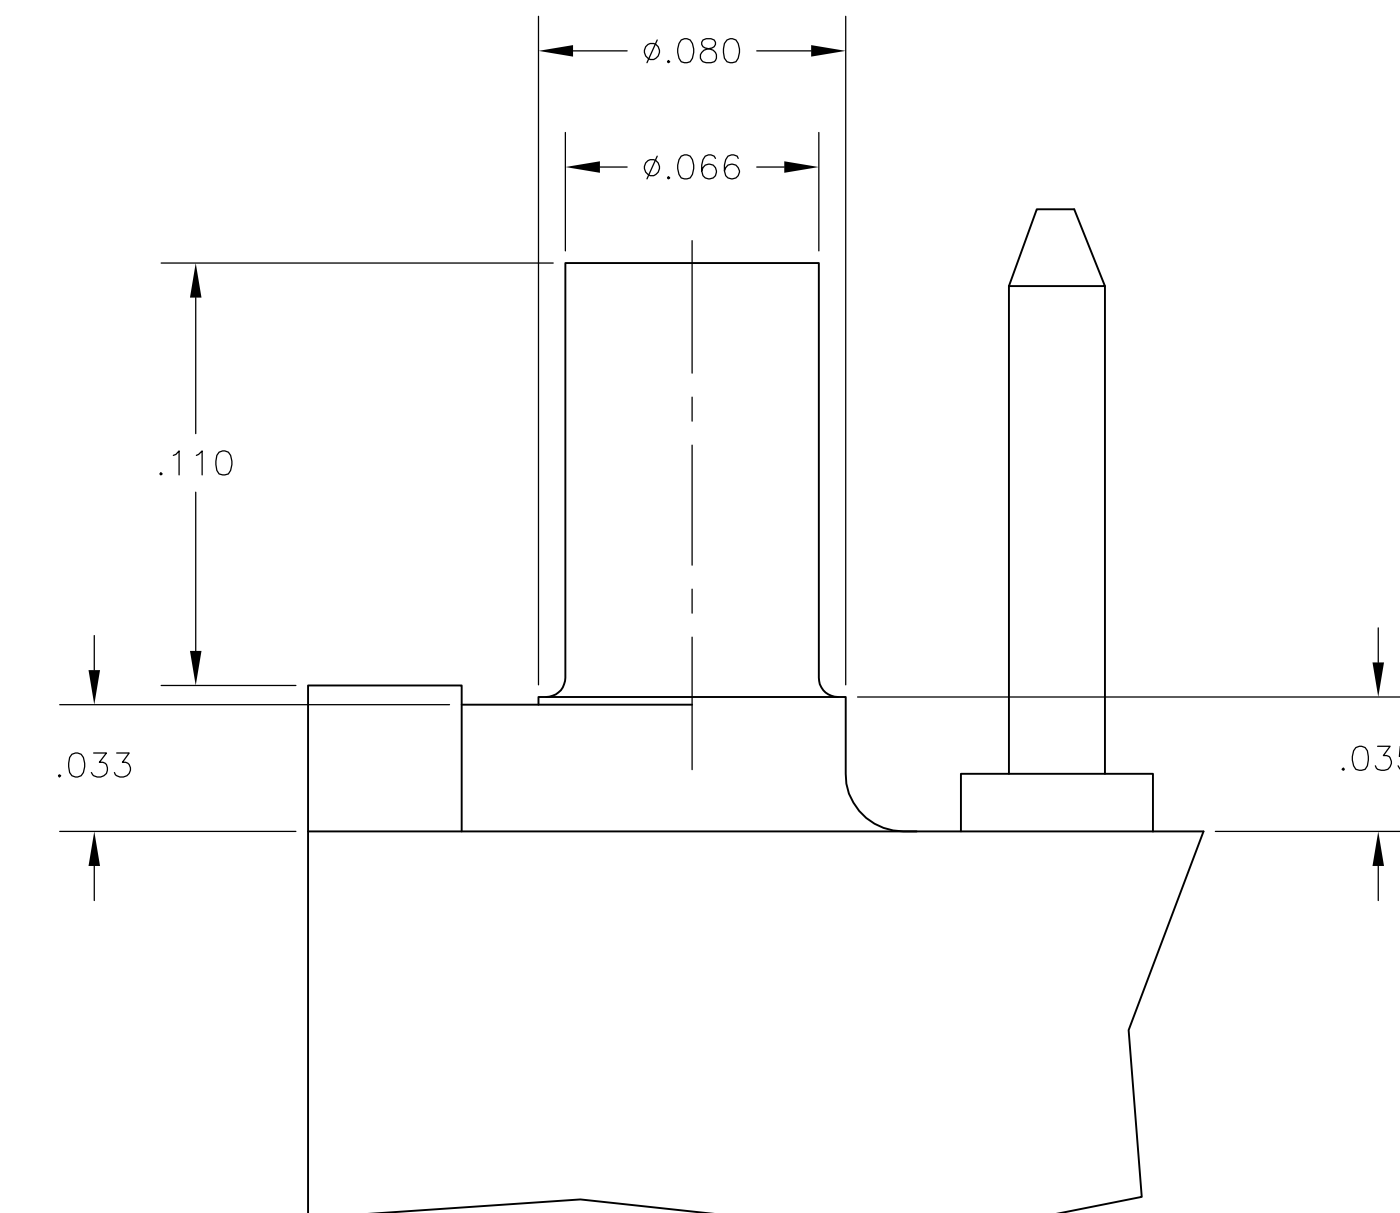
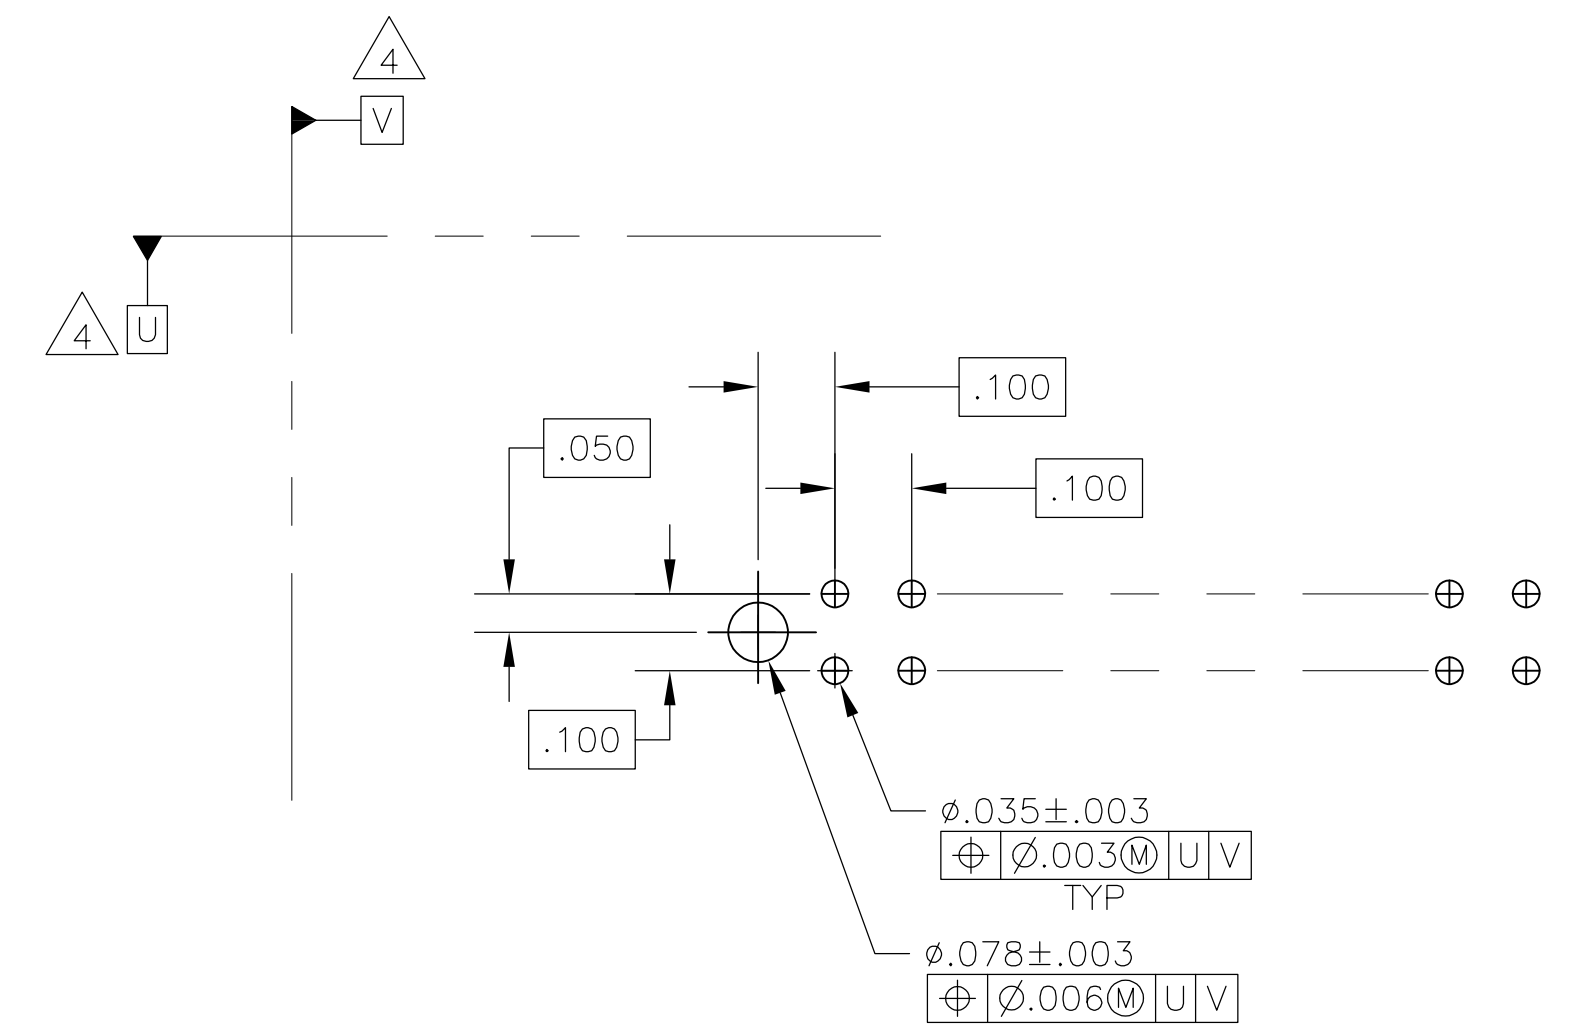


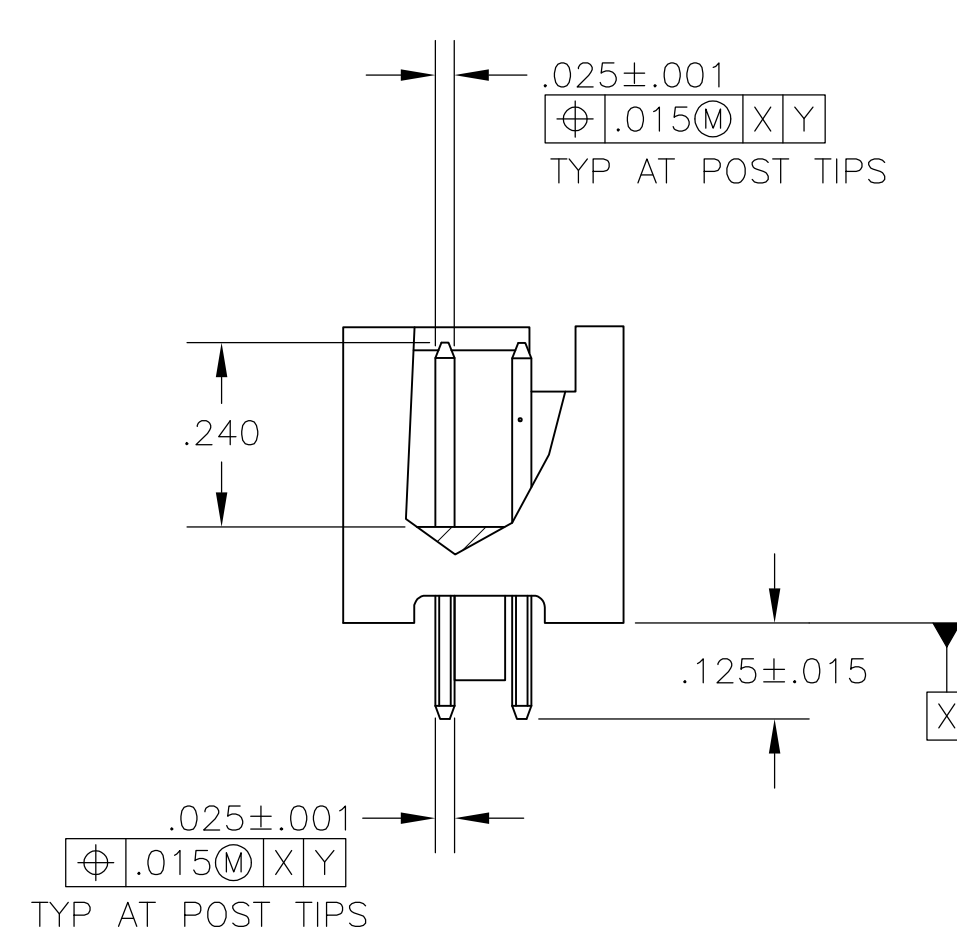

- 1 DOUBLE BAR POLARIZATION SLOTS.
- 2 CENTER POLARIZATION SLOT.
- 3 FOR 10 POSN ASSEMBLY, SLOT OMITTED IN THIS LOCATION.
- 4 DATUMS U AND V TO BE ESTABLISHED BY THE CUSTOMER.
- 5 HOUSING: GLASS FILLED 46 NYLON, UL 94V-0, COLOR: BLACK
POSTS: BRASS.
- 6 POSTS: GOLD FLASH OVER PALLADIUM-NICKEL PLATE, .000030 MIN TOTAL ON THE MATING SUFACES, .000100 MIN TIN PLATE ON THE SOLDER-TAILS, .000050 MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
-OR-
.000030 MIN GOLD PLATE ON THE MATING SURFACES, .000100 MIN TIN PLATE ON THE SOLDER-TAILS, .000050 MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
- 7 RIBS:
ALL POSITION SIZES: 2 LOCATED AT ENDS OF HOUSING.
20 THRU 26 POSITION SIZES: 1 OPTIONAL RIB CENTERED ON HOUSING.
50 POSITIONS SIZE: 2 OPTIONAL RIBS EVENLY SPACED WITHIN REMAINING LENGTH OF HOUSING.

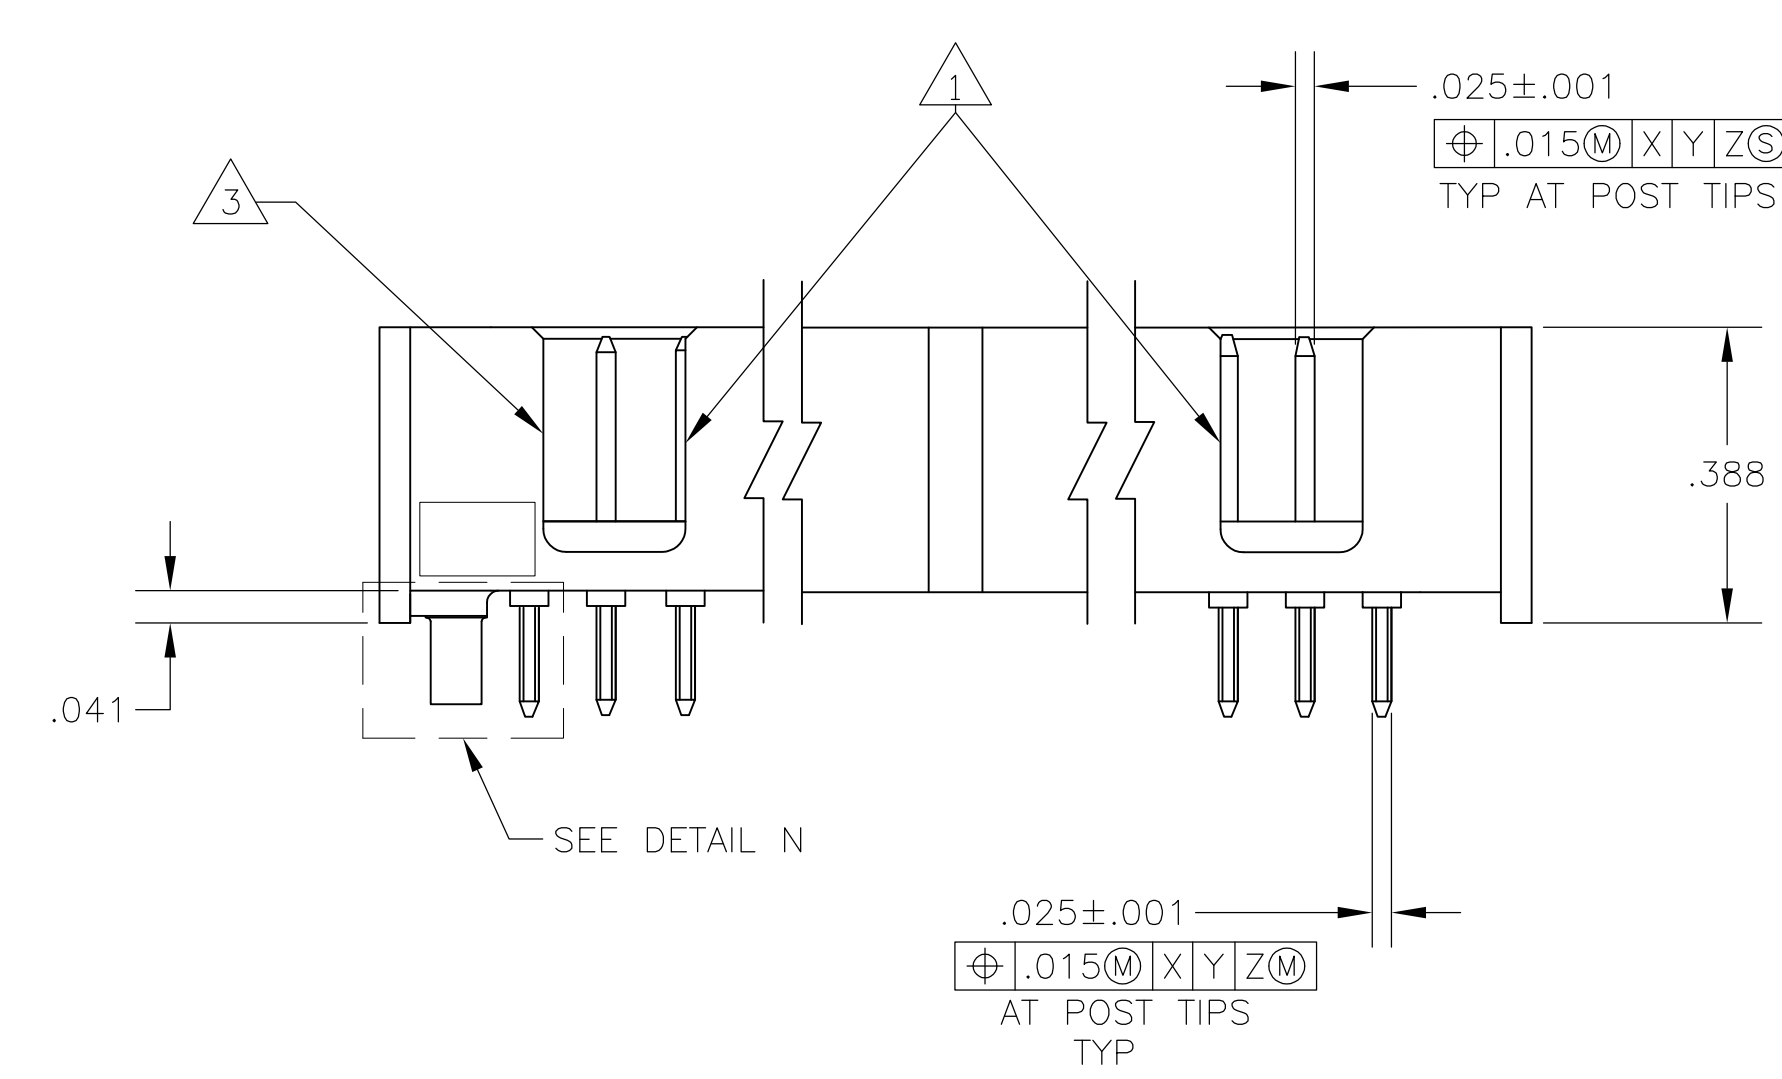

2.800	2.400	24	50	1888193-9
1.600	1.200	12	26	1888193-6
1.300	.900	9	20	1888193-4
.800	.400	4	10	1888193-1
C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

C. LAUBACH

14 DEC 05

CHK

S. BOLASH

14 DEC 05

APVD

M. WALMSLEY

14 DEC 05

TE Connectivity

DIMENSIONS:

INCHES

0 PLC

1 PLC

2 PLC

3 PLC

4 PLC

ANGLES

$\pm$

$-$

$\pm$

$-$

$\pm$

$-$

$\pm$

$-$

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC $\pm$ -

1 PLC $\pm$ -

2 PLC $\pm$ -

3 PLC $\pm$.005

4 PLC $\pm$ -

ANGLES $\pm$ -

MATERIAL

5

FINISH

6

NAME

HEADER ASSY, VERTICAL, LOW PROFILE, AMP-LATCH

PRODUCT SPEC

108-40018

APPLICATION SPEC

-

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

100779

1888193

-

CUSTOMER DRAWING

SCALE

4:1

SHEET

1

OF

1

REV

G

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1888193-4](#)