

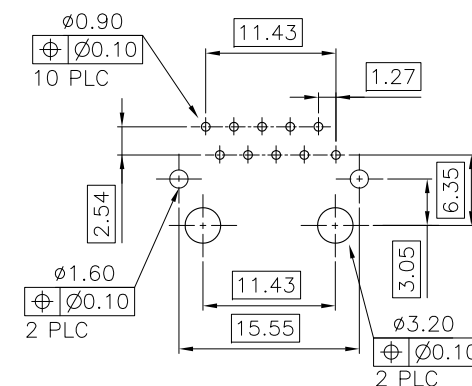


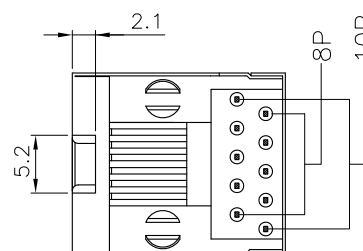

RECOMMENDED PCB LAYOUT (THICKNESS: 1.6mm)
DIMENSION TOLERANCE: 1 PLC: ± 0.1 2PLC: ± 0.05)

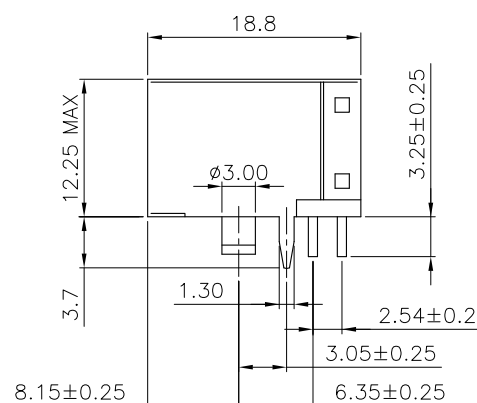

5. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBsolete	10P8C	RED	50μ"	3-1734580-4
OBsolete			30μ"	3-1734580-3
OBsolete			15μ"	3-1734580-2
OBsolete			6μ"	3-1734580-1
OBsolete	10P10C	BLACK	50μ"	1-1734580-4
			30μ"	1-1734580-3
			15μ"	1-1734580-2
			6μ"	1-1734580-1
OBsolete	10P8C △	BLACK	50μ"	1734580-8
			30μ"	1734580-7
			15μ"	1734580-6
			6μ"	1734580-5
OBsolete	10P8C	BLACK	50μ"	1734580-4
			30μ"	1734580-3
			15μ"	1734580-2
			6μ"	1734580-1
	RJ 45	HSG. COLOR	MIN. GOLD THICKNESS	PART NUMBER

	SCALE	—	SHEET	1 OF 2	REV	B3
--	-------	---	-------	--------	-----	----

SEE NOTE

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-



COPYRIGHT

-

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC
DWDIST
-

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD



SEE SHEET 1.

MODULAR JACK


TOP COVER

TRAY

CARTON

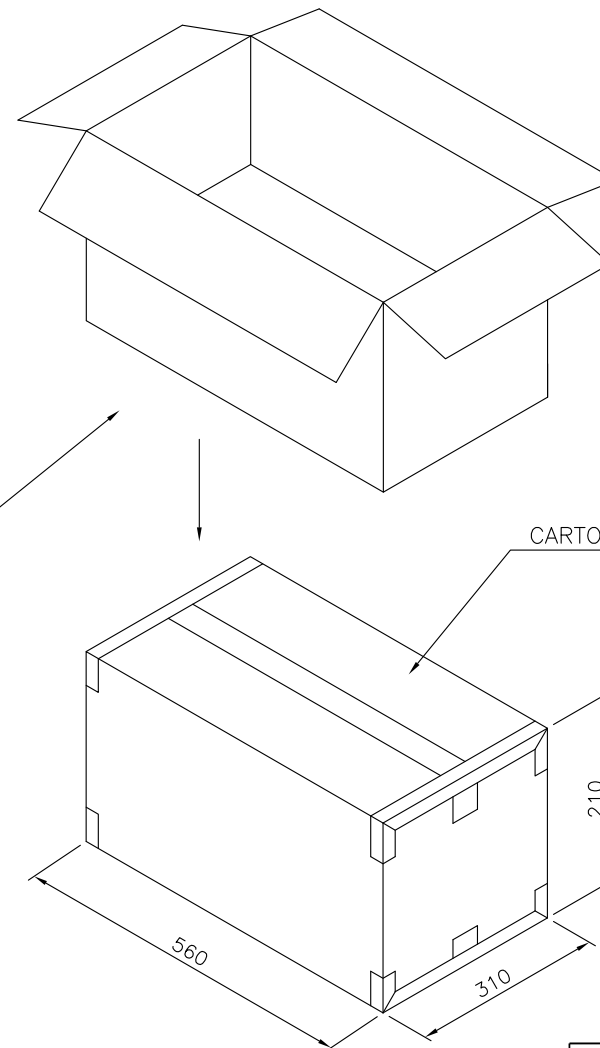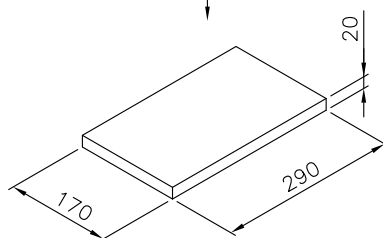

15 Kg	13.5 Kg	100	25	2500 PCS
GROSS WEIGHT	NET WEIGHT	PCS/TRAY	TRAYS /CARTON	QUANTITY

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN O. HU	01JUN2007	 TE Connectivity			
DIMENSIONS: MM		CHK S. HOU	01JUN2007				
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD W.J. KE	NAME			
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC —	MODULAR JACK, RJ45, 8P8C, SHIELDED, SIDE ENTRY, LOW PROFILE			
MATERIAL		APPLICATION SPEC —	WEIGHT —	SIZE A3	CAGE CODE 00779	DRAWING NO C=1734580	RESTRICTED TO —
CUSTOMER DRAWING			SCALE —	SHEET 2	OF 2	REV B3	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1734580-4](#)