



720 GFX-i Series Sealed and Rugged Keypads

These tough, water resistant keypads feature moving, tactile keys with a responsive 'over-centre' action. Keypad graphics can be easily customized by the use of legend tiles under 'snap-on' transparent keycaps. Once snapped into place the tamper resistant keycaps encapsulate and protect the keytop graphics. These keypads have integral white light LED illumination for use in dark or partially lit locations.



Connection Details

Connection Details for 4 Key Keypad

CONTACT CONNECTIONS


CONN. PIN	ROW/ COLUMN
1	Cathode
2	Common
3	D
4	C
5	B
6	A
7	Anode

KEY LOCATION
 (As viewed from front of keypad)

CONTACT MATRIX	
CONN. PIN	ROW/ COLUMN
1	Cathode
2	Common
3	D
4	C
5	B
6	A
7	Anode


The keypad can be installed on the surface or under the panel.

Fit the supplied silicone seal into the seal groove on the keypad. Use the groove on top for underpanel, and on back for surface fix. The wide part of the seal goes into the groove – see picture below of the seal fitted to the back of the keypad.

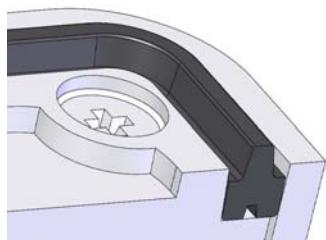

To customise the layout place a colour tile and a legend tile onto the key base, and clip the keycap over the top.

Keytop Assembly

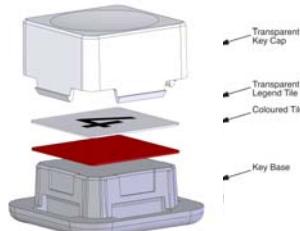

Connection Details for 12 Key Keypad

CONTACT CONNECTIONS

CONN. PIN	ROW/ COLUMN
1	Cathode
2	A
3	B
4	1
5	2
6	3
7	–
8	D
9	C
10	Anode

KEY LOCATION
 (As viewed from front of keypad)

CONTACT MATRIX	
CONN. PIN	ROW/ COLUMN
1	Cathode
2	A
3	B
4	1
5	2
6	3
7	–
8	D
9	C
10	Anode

White Colour Tiles and Set A Legends are included; Set A Legends comprises :-

1 2 3 4 5 6 7 8 9 0 + = x ÷ * # . ← ↑ → ↓ AC I/O ENT CE/E

Additional Legends (Tile sets B,C,D,E,F,) & Colours (White, Grey, Red, Green, Blue, Yellow) are available

Electrical

Contact Bounce	5 ms (max)
Contact Resistance	100 ohms (max)
Insulation Resistance	50 Mohms (min)
Breakdown Voltage	500 V AC (max 60 secs.)
Switch Rating	24V DC 50mA (max)
Connection	X-Y Matrix
Illumination (Pin 1 is 0 V)	5 V DC ± 10 % ,13mA per key

Mechanical

Operational Life	2 million cycles (min) per key
Keytop Travel	1.4mm nominal
Actuation Force	150 grams nominal
Connector	0.1"pitch, gold plated square pin
Mating Connector	Molex 2695 Series or equivalent

Performance

Operational Temp	-20°C to 60°C
Impact Rating	5 J
Vibration/Shock	ETSI 300 019 5M3
Water / Dust sealed	IP65 (when fixed to suitable panel)

Part Numbers

7207-041W20	720GFXi SERIES 4 KEY
7207-121W20	720GFXi SERIES 12 KEY
7207-161W20	720GFXi SERIES 16 KEY

Accessories

4200-00	RS232 Encoder Interface Module
4500-10	450 USB Encoder Interface Module with Buzzer and Illumination Control
Colour & Legend Tiles & Replacement Seals	go to www.storm-interface.com

Dimensions

Overall sizes
 Panel Cutout DXF
 Surface Model STEP
 See following page
 Download .dxf and .stp files from
www.storm-interface.com



FM 39602



Storm is a trademark of Keymat Technology Ltd.
 Storm Interface is a trading name of Keymat Technology Ltd.
 Storm Interface products include
 technology protected by international patents
 and design registration. All rights reserved




720 GFX-i Series Sealed and Rugged Keypads


Install the keypad onto the surface of a panel as follows :-

- Fit the seal to the rear of the keypad
- Place the keypad onto the panel and fit the self locking nuts to the studs on the back
- Recommended tightening torque 50Ncm


Side View : 4, 12, 16

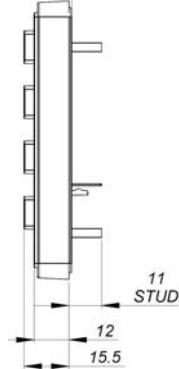


Front and Back View : 4 way

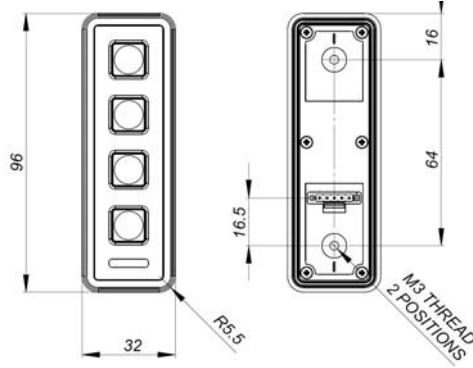


Panel Cutout : 4 way




Front and Back View, 12 way

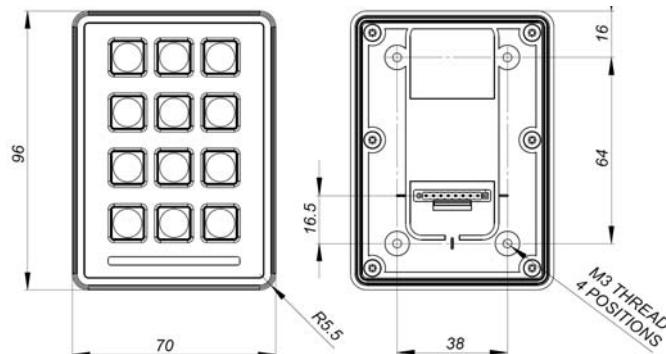


Panel Cutout : 12 way

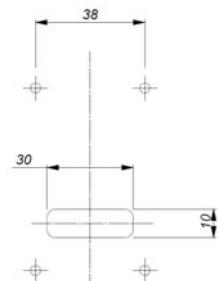

Front and Back View, 16 way

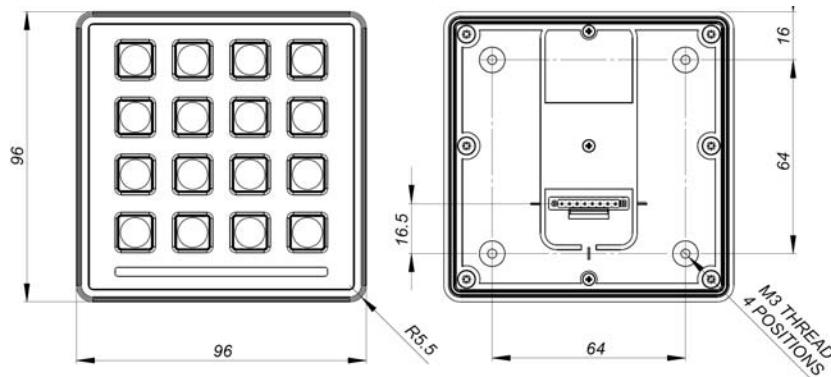

Panel Cutout : 16 way

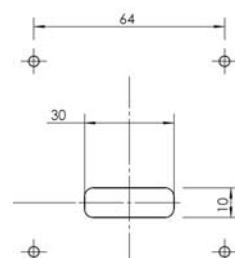

All panel dims in mm.
Corner Rads all M3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Storm Interface:

[7207-041W203](#) [7207-121W203](#) [7207-161W203](#)