


CUSTOMER DRAWING

XX	DESIGNATION	25.4 MAX
00	STRAIGHT PLUG	
01	ANGLE PLUG	33.5 MAX 28.0
02	STRAIGHT BULKHEAD JACK	25.4 MAX
03	STRAIGHT JACK	25.4 MAX
04	STRAIGHT PANEL JACK	25.4 MAX 4 X M25 X 0.45

SCALE: NONE

SIZES L,M: $\phi 14.0$ MIN
SIZE S: $\phi 8.0$ MIN

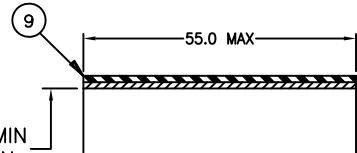

10

FEMALE

10

11

11

11

9

55.0 MAX

L MAX

ϕA MIN

ϕB MIN

1

2

3

5

4

7

8

6

FOR EXAMPLE: RBD-75-M-00

Y	PRODUCT DIMENSIONS			CABLE DIMENSIONS			
	L MAX	ϕA MIN	ϕB MIN	ϕD MAX	ϕF MAX	ϕE	ϕG
L	31.0	9.6	12.7	2.45	7.3	4.1/9.5	5.0/12.5
M	31.0	5.1	7.2	1.25	3.7	2.1/5.0	3.5/7.0
S	26.0	3.1	5.7	0.65	1.55	0.9/3.0	1.5/5.5


MATERIALS:

1. CENTER CONTACT: GOLD PLATED BRASS (MALE) OR GOLD BERYLLIUM COPPER (FEMALE).
- 2,6. INSULATION SLEEVE: HEAT SHRINKABLE, TRANSPARENT BLUE. RADIATION CROSS-LINKED MODIFIED POLYVINYLDIENE FLUORIDE.
3. SOLDER PREFORM: Sn63 Pb37 SOLDER ALLOY WITH MILDLY ACTIVATED ROSIN FLUX.
4. THREADED TRANSITION PART: SILVER PLATED BRASS.
5. INSULATOR: PTFE.
7. SOLDERSHIELD DEVICE: TIN PLATED COPPER BRAID WITH MILDLY ACTIVATED ROSIN FLUX.
8. SOLDER PREFORM (ON L AND M SIZE ONLY): Sn63 Pb37 SOLDER ALLOY WITH MILDLY ACTIVATED ROSIN FLUX.
9. INSULATION SLEEVE: HEAT SHRINKABLE, COLOR BLACK, RADIATION CROSS-LINKED MODIFIED POLYOLEFIN WITH ADHESIVE.
10. INSULATOR (EXCEPT FOR ANGLE PLUG): PTFE.
11. BODY: NICKEL PLATED BRASS.

APPLICATION:

1. THESE CONTROLLED SOLDERING DEVICES ARE DESIGNED TO CONNECT, WITH A MIL-PRF-39012 BNC INTERMATEABLE PART, A 75Ω SINGLE OR DOUBLE BRAIDED COAXIAL HAVING A:
 - TIN OR SILVER PLATED COPPER OUTER CONDUCTOR.
 - TIN OR SILVER PLATED INNER CONDUCTOR.
 AND INSULATION RATED FOR AT LEAST $+85^\circ\text{C}$.
2. TEMPERATURE RANGE:
 - * WITH BLACK SLEEVE: -55°C TO $+100^\circ\text{C}$.
 - * WITHOUT BLACK SLEEVE: -55°C TO $+150^\circ\text{C}$.
3. FOR INSTALLATION PROCEDURE AND APPLICATION EQUIPMENT, CONSULT EITHER RPIP-683-00 OR RPIP-683-00-D.


FOR BEST RESULTS, PREPARE THE CABLE AS SHOWN:

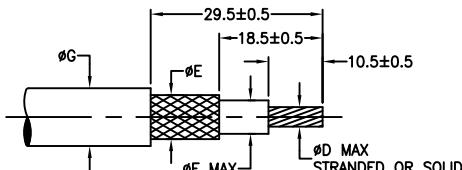


© 2014 TE Connectivity Ltd. All Rights Reserved

PANEL THICKNESS: 3.2 MAX

▲ For RBD-75-Y-02



For RBD-75-Y-04

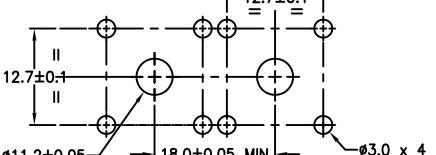

IF THIS DOCUMENT IS PRINTED IT BECOMES UNCONTROLLED. CHECK FOR THE LATEST REVISION.



Raychem
PRODUCTS

TE Connectivity

TITLE:

ONE STEP RF CONNECTOR
 75Ω BNC

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS.

TOLERANCES:

0.00

0.0

0

ANGLES: —

ROUGHNESS

IN MICRON

TE CONNECTIVITY RESERVES THE RIGHT TO
AMEND THIS DRAWING AT ANY TIME. USERS
SHOULD EVALUATE THE SUITABILITY OF THE
PRODUCT FOR THEIR APPLICATION.

DOCUMENT NO:

RBD-75-Y-XX

ECO NO:
ECO-14-009904

DRAWN:
N. NAGAR

SIZE:
A

SCALE:
X

CHECKED:
N. PRZYBYLSKA

DOC. REV:
4

DATE:
30JUN14

SHEET:
1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[RBD-75-M-02](#)