

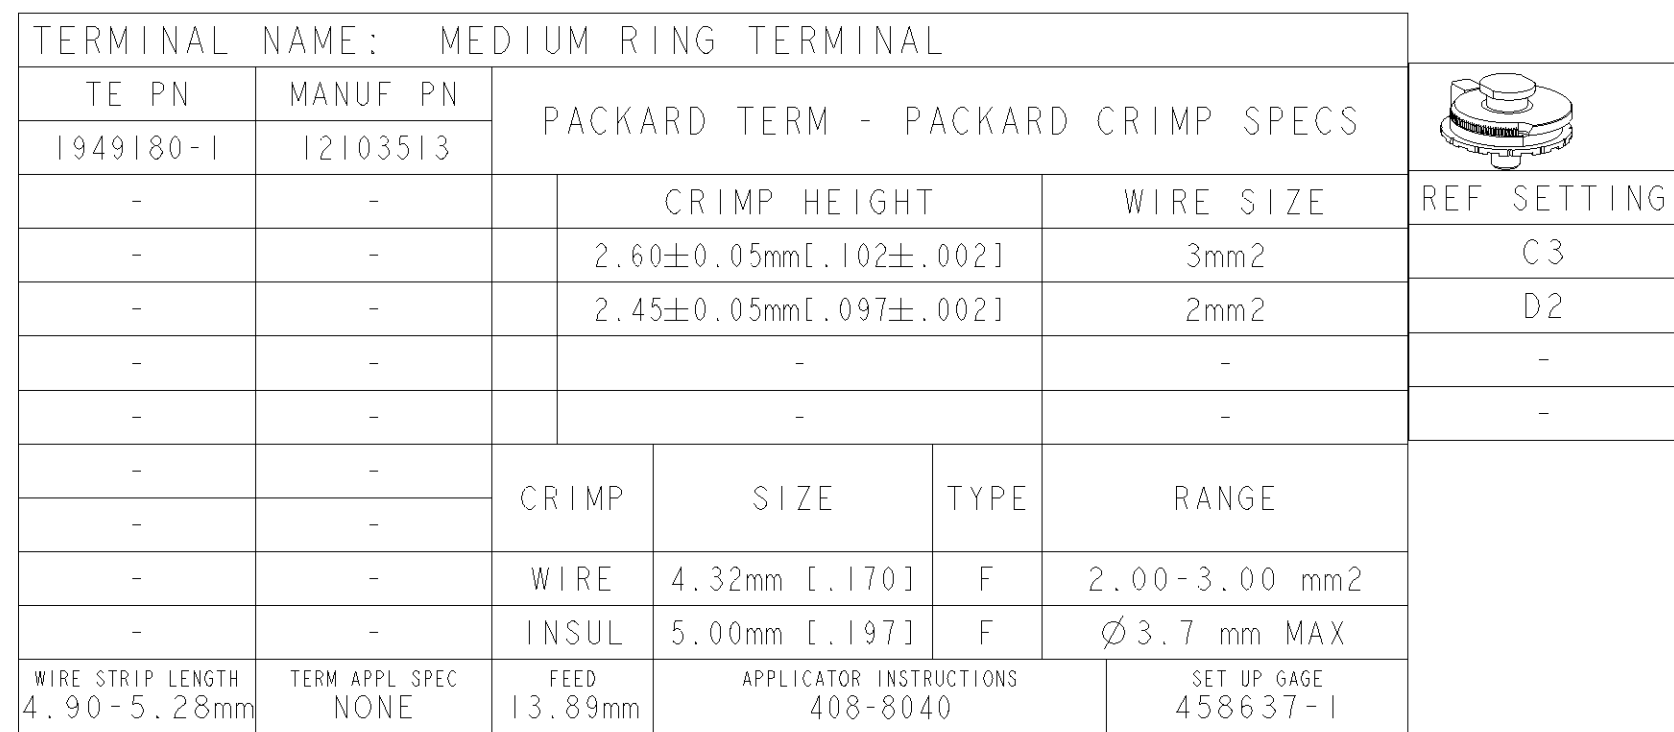


ON INSTALLATION, SET WIRE
DISC TO LARGEST WIRE SIZE
SETTING. USE OF SETTINGS
BELOW MIN. REQUIRED CRIMP
HEIGHT SETTING WILL CAUSE
DAMAGE TO CRIMP TOOLING.

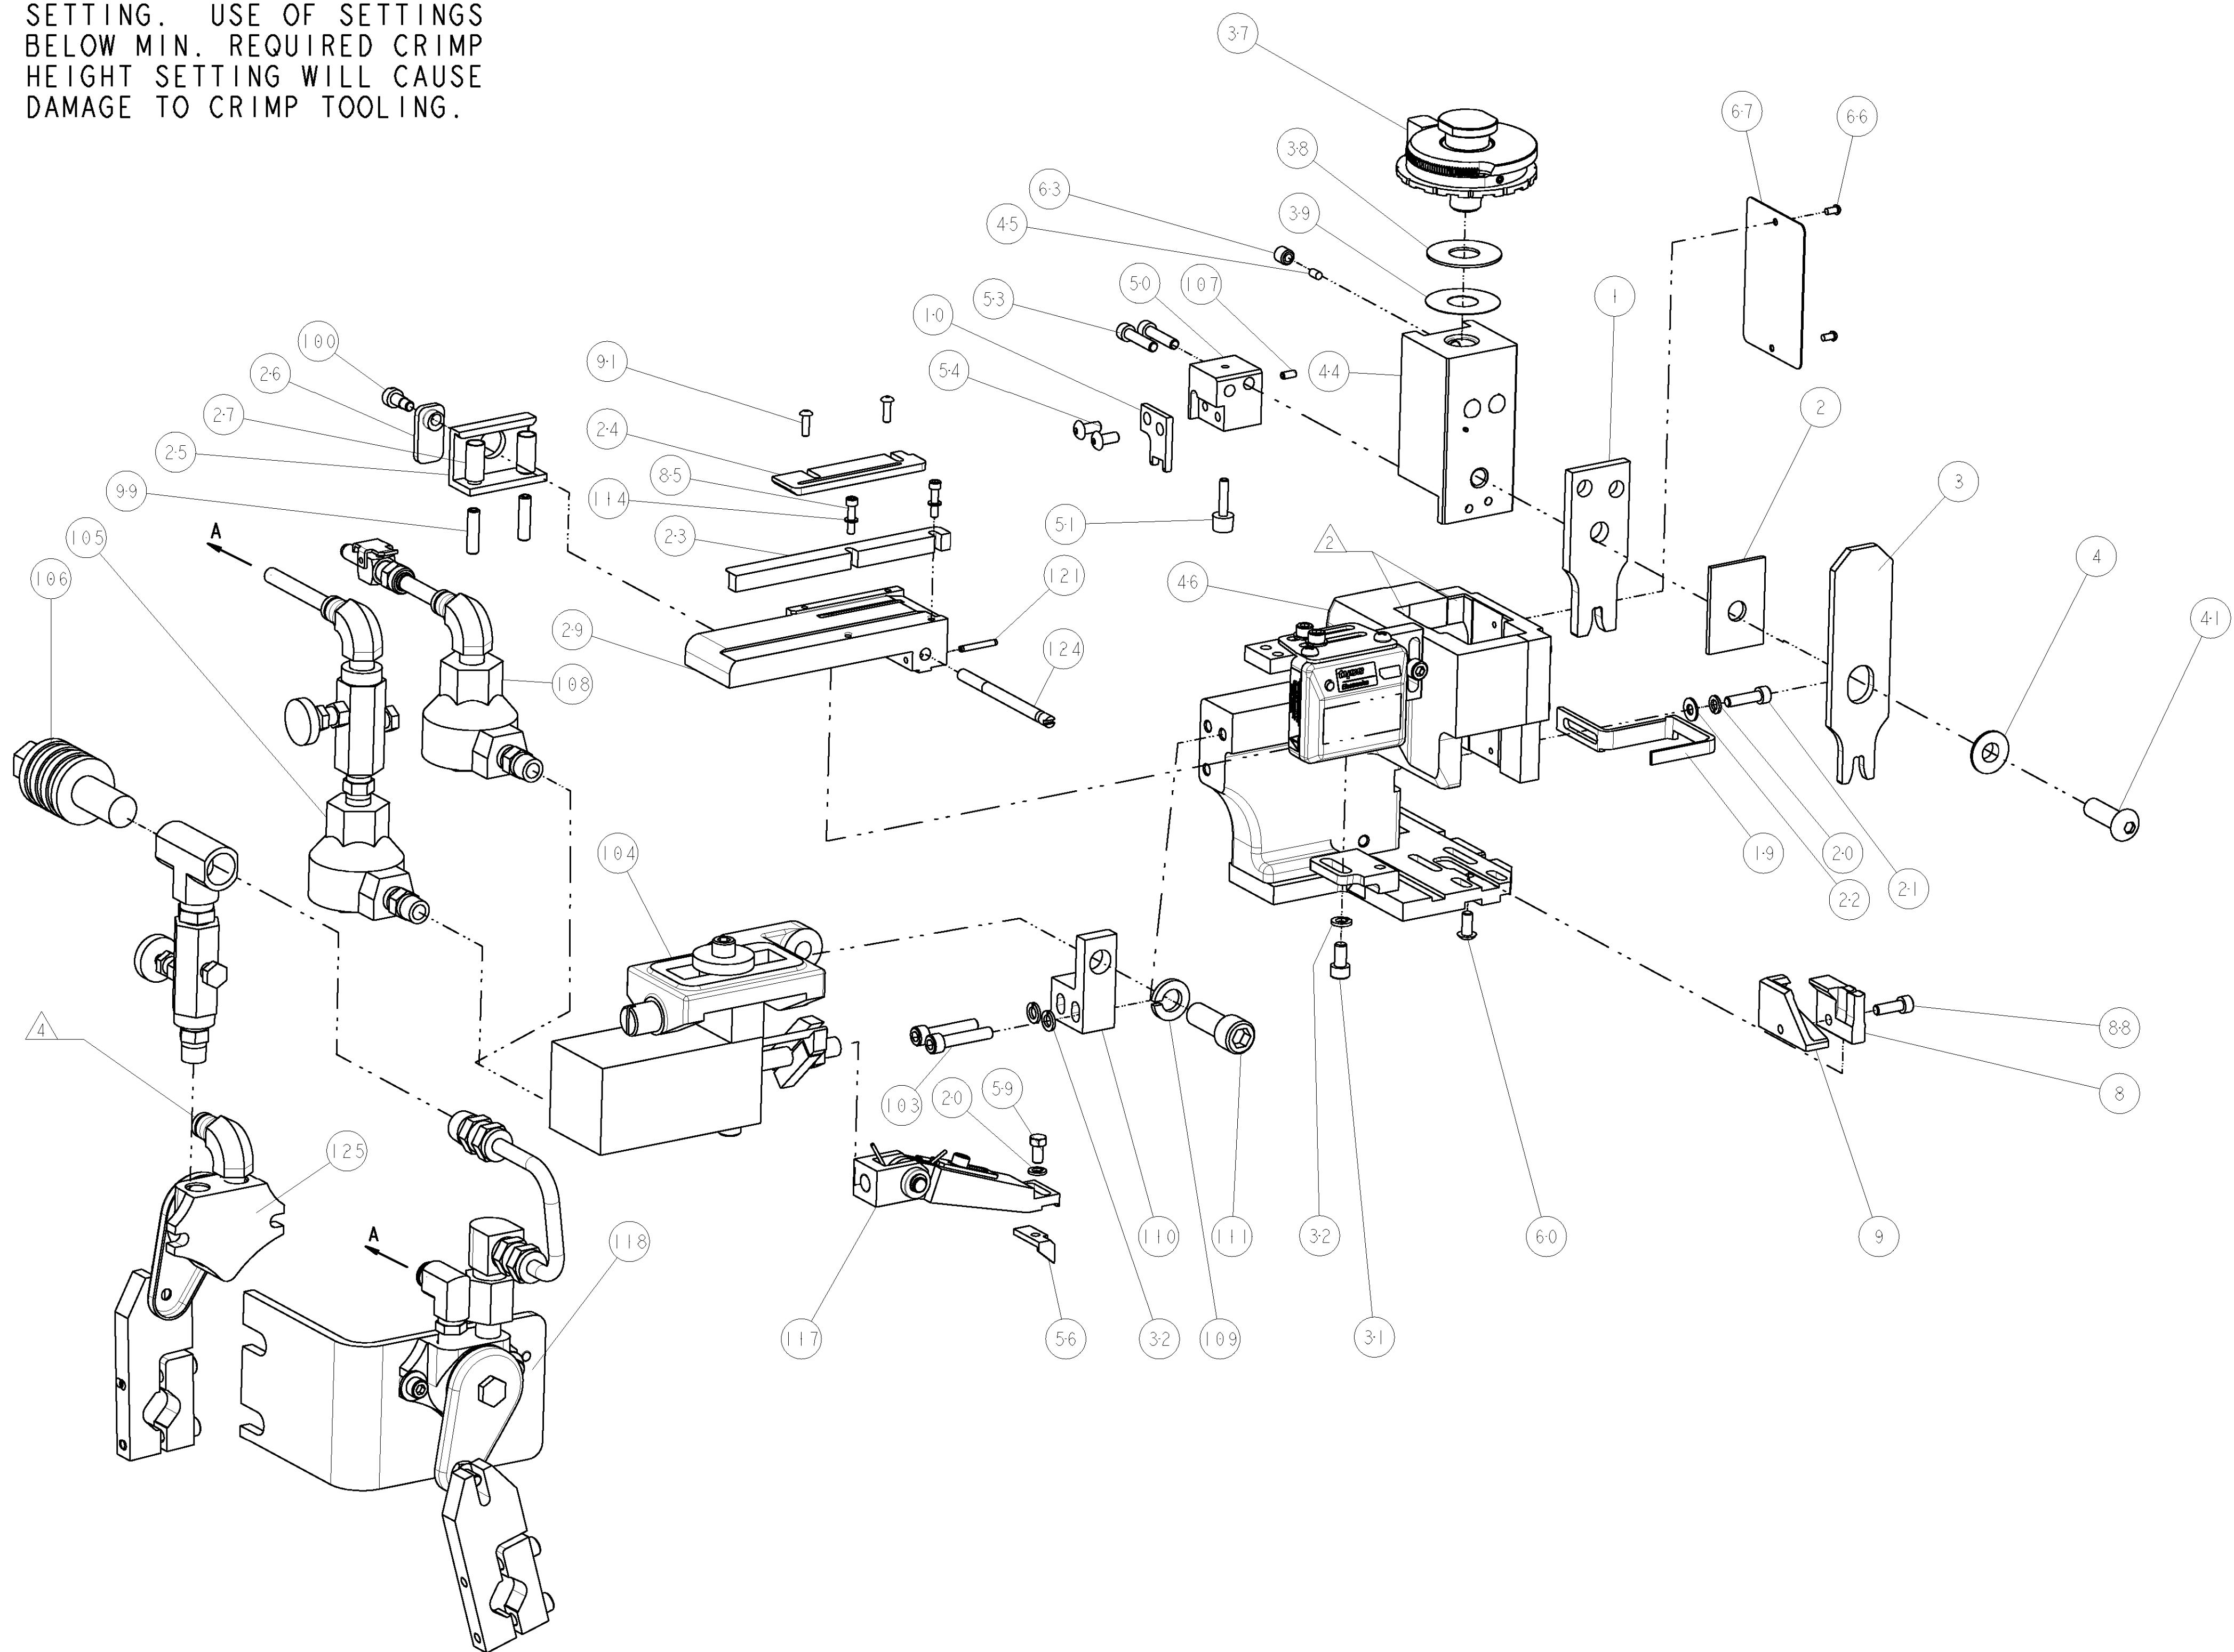

-	-	1	-	-	455350-4	AIR BLAST ASS'Y	125
-	1	1	1	-	690432-3	ADJUSTMENT SCREW	124
-	1	1	1	-	3-21028-9	PIN, SLOTTED SPRING .094 X .688	121
-	18	24	18	IN	27319-4	TUBING, POLY-FLO, NATURAL	119
-	-	1	-	-	692655-6	AIR FEED VALVE ASSEMBLY	118
-	1	1	1	-	461062-1	FEED FINGER ASSEMBLY	117
-	-	REF	-	..	455749-1	GUARD WINDOW	116
-	REF	-	-	..	679532-1	INSERT, GUARD	115
-	2	2	2	-	21024-2	WASHER, SPRG LOCK, REG NO 4	114
-	1	1	1	-	3-21001-5	SCR, SKT HD CAP 3/8-16 X 1.000	111
-	1	1	1	-	459610-1	MOUNT, FEED BRACKET	111
-	1	1	1	-	21024-8	WASHER, SPRG LOCK, REG 3/8	110
-	1	-	1	-	692655-7	AIR FEED VALVE ASSEMBLY	108
-	1	1	1	-	2-21006-1	SCR, SET, CUP POINT 4-40 X .250	107
-	-	1	-	-	24042-2	VALVE, SLEEVE, 3-WAY	106
-	-	1	-	-	692655-5	AIR FEED VALVE ASSEMBLY	105
-	1	1	1	-	461065-1	ASSEMBLY, AIR FEED	104
-	2	2	2	-	3-21000-9	SCR, SKT HD CAP 10-32 X 1.000	103
-	1	1	1	-	986220-3	CLAMP, CABLE, BLACK	102
-	1	1	1	-	23238-1	INSERT, COUPLING	101
-	1	1	1	-	22353-8	SCR, SHLD, SLOT HD, 3/16 DIA	100
-	2	2	2	-	5-21006-6	SCR, SET, CUP POINT 10-32 X .750	99
-	2	2	2	-	1-21002-4	SCR, BTN SKT HD CAP 4-40 X .375	91
-	1	1	1	-	2-21000-7	SCR, SKT HD CAP 8-32 X .500	88
-	2	2	2	-	1-21000-5	SCR, SKT HD CAP 4-40 X .500	85
-	1	1	1	-	4088040	SF APPL INST 408-8040	72
-	1	1	1	-	217238-1	GENERAL INSTRUCTION PKG	71
-	1	1	1	-	461264-5	PLATE, IDENTIFICATION	67
-	2	2	2	-	21017-2	SCREW, DRIVE	66
-	1	1	1	-	21009-2	SCR, SET, SELF LOCKING 1/4-20 X .250	63
-	1	1	1	-	22733-8	SCR, BHSC, SELF-LOCKING, 8-32 X .375	60
-	1	1	1	-	2-22603-0	SCR, HEX HD CAP 8-32 X .312	59
-	1	1	1	-	3-694433-9	FEED PAWL	56
-	2	2	2	-	2-21002-1	SCR, BTN SKT HD CAP 8-32 X .375	54
-	2	2	2	-	2-21000-9	SCR, SKT HD CAP 8-32 X .750	53
-	1	1	1	-	811242-2	BUMPER, HOLD DOWN	51
-	1	1	1	-	1583893-7	HOLDER, SLUG BLADE	50
-	1	1	1	-	1633399-1	APPL., BASIC AIR FEED SUB ASSY	46
-	1	1	1	-	690191-1	PLUG,NYLON	45
-	1	1	1	-	1-455673-4	RAM, SIDE FEED	44
-	1	1	1	-	7-21002-9	SCR, BTN SKT HD CAP 5/16-24 X 1.00	41
-	1	1	1	-	690125-1	SHIM SUB-ASSY	39
-	1	1	1	-	469367-7	SHIM	38
-	1	1	1	-	879103-2	FINE ADJUST HEAD ASSEMBLY	37
-	3	3	3	-	21024-5	WASHER, SPRG LOCK, REG NO 10	32
-	1	1	1	-	3-21000-4	SCR, SKT HD CAP 10-32 X .375	31
-	1	1	1	-	2-844048-9	PLATE, REAR STRIP GUIDE	29
-	2	2	2	-	22281-9	SPRING, COMPRESSION	27
-	1	1	1	-	240793-1	LEVER, DRAG RELEASE	26
-	1	1	1	-	240792-1	DRAG, TERMINAL	25
-	1	1	1	-	1633497-2	REAR STRIP GUIDE	24
-	1	1	1	-	2-189124-1	GUIDE, FRONT STRIP	23
-	1	1	1	-	21055-6	WASHER, FLAT, REG NO 8	22
-	1	1	1	-	2-21000-8	SCR, SKT HD CAP 8-32 X .625	21
-	2	2	2	-	21024-4	WASHER, SPRG LOCK, REG NO 8	20
-	1	1	1	-	1-456468-1	STRIPPER, SPECIAL	19
-	1	1	1	-	1583859-7	BLADE, SLUG	10
-	1	1	1	-	1633124-9	PLATE, REAR SHEAR	9
1	1	1	1	-	1633507-6	ANVIL, SPECIAL, COMBINATION	8
-	1	1	1	-	1-238009-1	BLOCK, FL CRIMPER SPACER	4
1	1	1	1	-	2-1424909-2	CRIMPER, INSULATION F	3
-	1	1	1	-	1-455888-7	SPACER, CRIMPER	2
1	1	1	1	-	3-1490019-2	CRIMPER, WIRE PREMIUM	1



THIS DRAWING IS CONTROLLED THROUGHOUT THE PROJECT BY THE PROJECT MANAGER. ANY CHANGES TO THE DRAWING MUST BE APPROVED BY THE PROJECT MANAGER. ANY CHANGES TO THE DRAWING MUST BE APPROVED BY THE PROJECT MANAGER. ANY CHANGES TO THE DRAWING MUST BE APPROVED BY THE PROJECT MANAGER.		DWN 13SEP2007 REICHELDRUBEN		 Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.001 4 PLC ±.001 ANGLES ±.001		NAME FINE ADJUST SIDE FEE HDM APPLICATOR -	
		DWN 13SEP2007 T. ELBIN BENCHOFF		PRODUCT SPEC - APPLICATION SPEC -	
MATERIAL -		FINISH -		SIZE CAGE CODE DRAWING NO. A 00779 C=1855324	
WEIGHT -		CUSTOMER DRAWING -		SCALE 3:5 SHEET 1 OF 1 REV A	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1855324-1](#)