
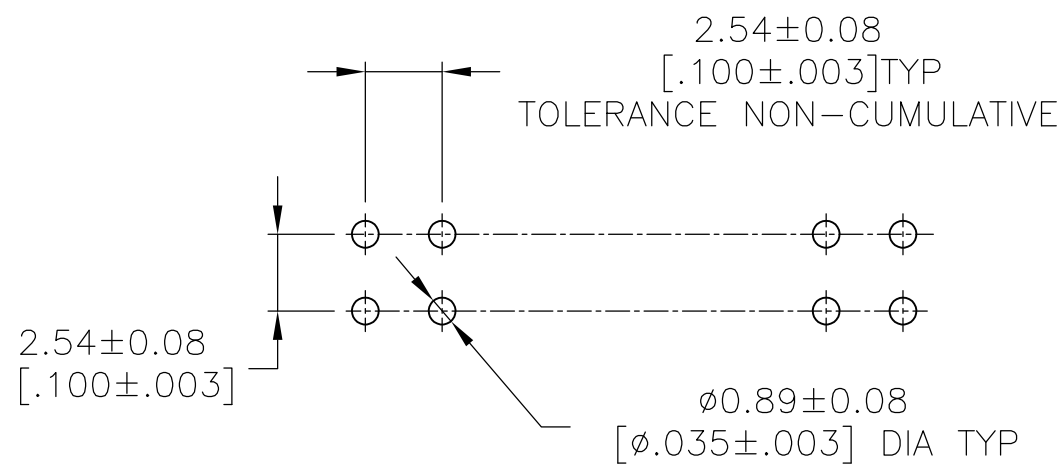
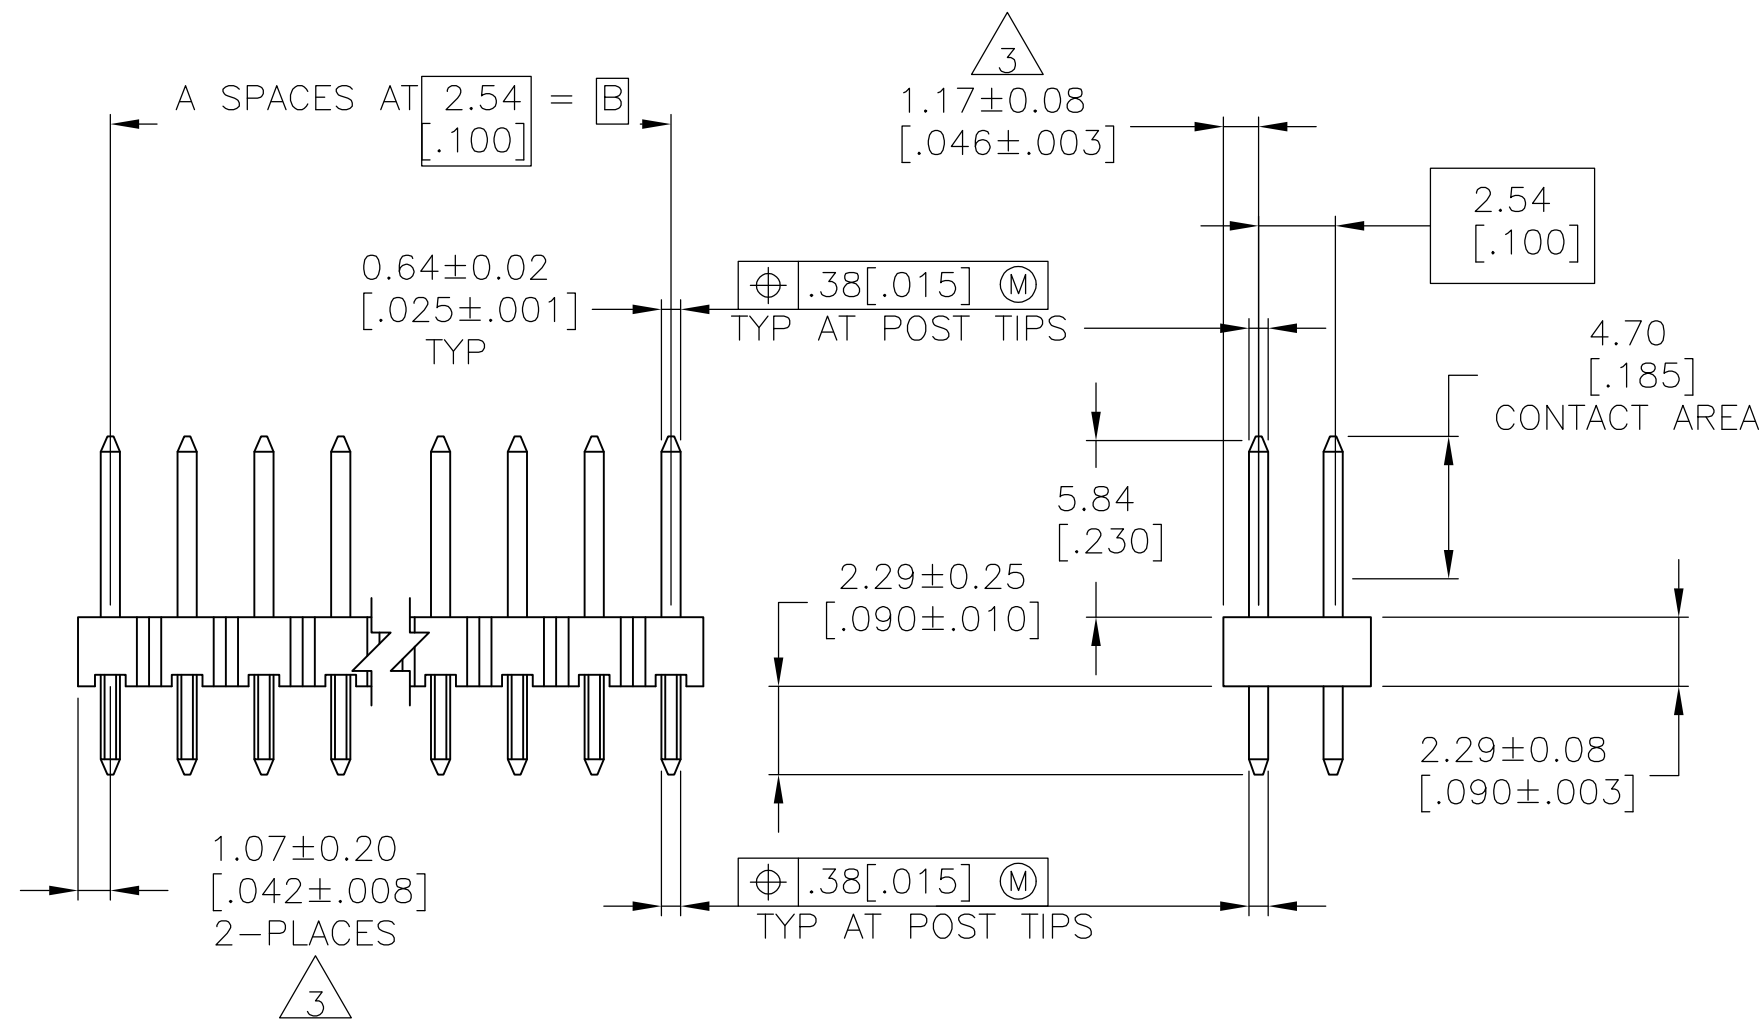


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	APVD
AD	00		H	REVISED PER ECO-14-000066	30JUN2014	NK

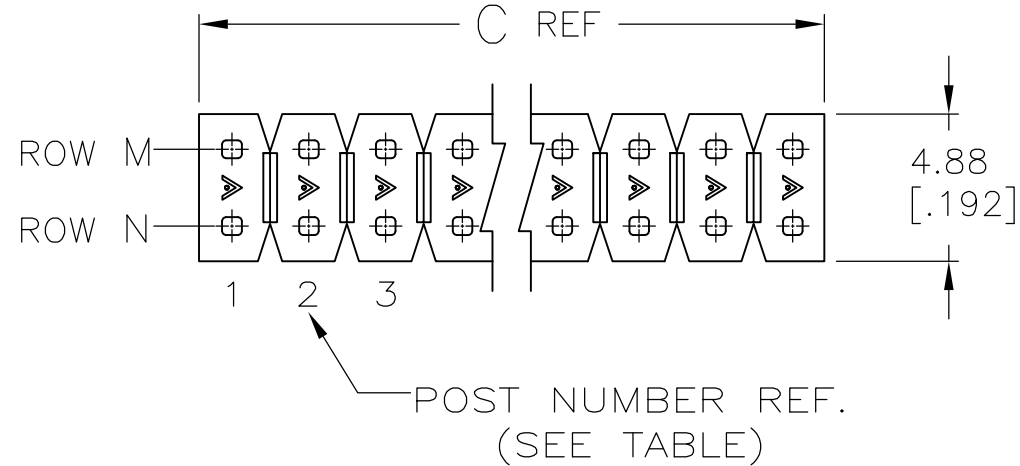

RECOMMENDED HOLE LAYOUT

- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2 TRUE POSITION TOLERANCE OF THE POSTS TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- 3 THE NOTED DIMENSION APPLIES AT THE INTERSECTION OF THE POST AND HOUSING.
- 4 FINISH: 0.000127 [.000005] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL ALL OVER 0.00127 [.000050] NICKEL.
- 5 FINISH: 0.000127 [.000005] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN ON SOLDER TAIL ALL OVER 0.00127 [.000050] NICKEL.
- 6 HIGH TEMPERATURE CONFIGURATION.

6	5	NONE	10	50.39 [1.984]	48.26 [1.900]	19	39	40	5-146222-1
	4	NONE	10	50.39 [1.984]	48.26 [1.900]	19	39	40	146222-1
REMARKS	PLATING	ROW N	ROW M	C	B	A	NO.OF ACTIVE POSN.	NO. OF POSN.	ASSEMBLY PART NUMBER
		POST OMITTED							

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN T. HOFFMAN 6-3-95	 TE Connectivity					
DIMENSIONS: mm [INCHES]				CHK G.DUBNICZKI 15-3-95						
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD G.DUBNICZKI 15-3-95	NAME HEADER ASSEMBLY, MOD II, BREAKAWAY, DOUBLE ROW, .100 X.100, VERTICAL, .025 SQ.POST, SELECT LOAD					
				PRODUCT SPEC —						
				APPLICATION SPEC —						
				—						
		0 PLC ± — 1 PLC ± — 2 PLC ± 0.13[.005] 3 PLC ± — 4 PLC ± — ANGLES ± 0° 30'		WEIGHT —	SIZE A2	CAGE CODE 00779	DRAWING NO C=146222	RESTRICTED TO —		
MATERIAL HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR: BLACK POSTS: COPPER ALLOY		FINISH SEE TABLE		RESTRICTED CUSTOMER				SCALE 4:1	SHEET 1 of 1	REV H

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[146222-1](#)