

**Mallory Sonalert Products, Inc.**

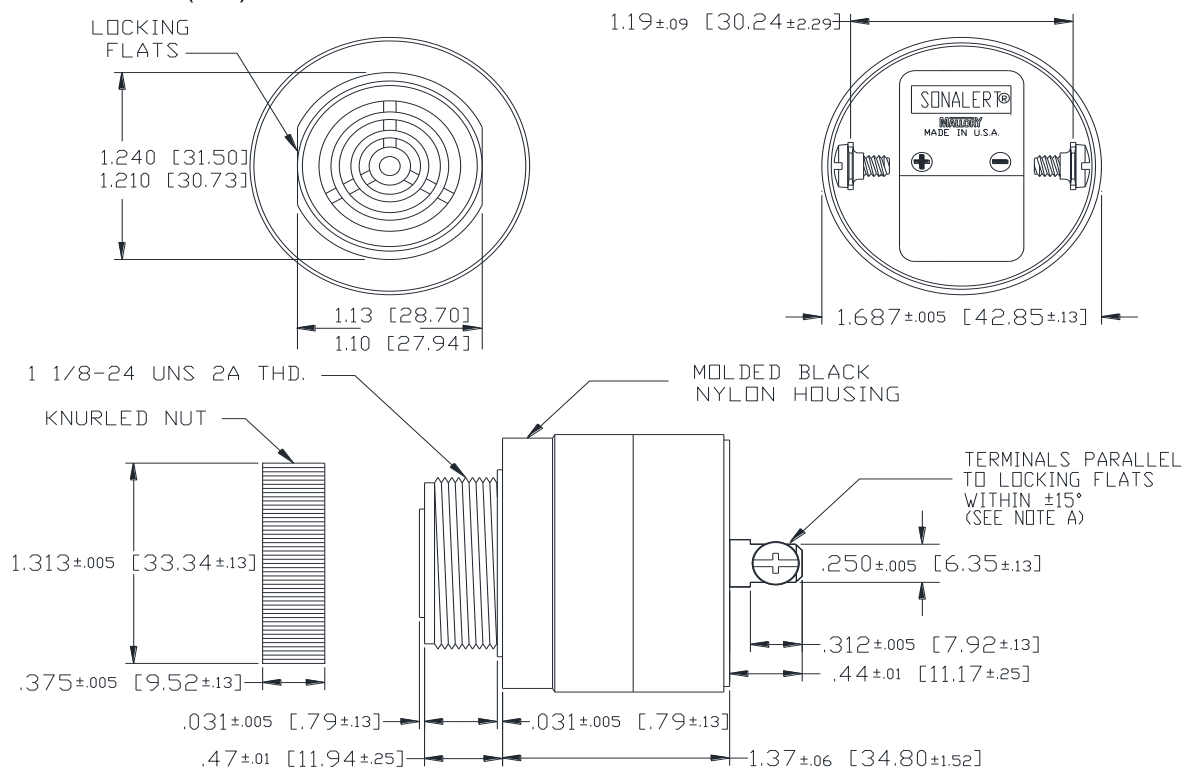
Part #:

SC628NDP**Sales Outline Drawing**

Revision:

C**Specifications:**

| | |
|-----------------------|--------------------------------------------------------------------------------------------|
| Sound Level Category | Loud |
| Mode of Operation | Fast Pulse @ 2 - 10 PPS |
| Voltage Rating | 10 to 28 VDC |
| Frequency | 2000 ± 500 Hz |
| Loudness @ 2 FT | 83 to 97 dB(A) Typ. |
| Current Draw | 3-16mA |
| Duty Cycle | 50 |
| Housing Material | 6/6 Nylon, Color: Black |
| Storage Temperature | -40° to +85° C |
| Operating Temperature | -30° to +65° C |
| Panel Mounting | Recommended hole size is 1.25"(31.75mm). Thread front will fit standard 30mm(1.181") hole. |
| Knurled Nut | Used to attach part to panel. The max recommended torque is 10 in-lbs. |
| Weight (Typical) | 2.1 oz (60g) |
| NEMA 3R, 4X, & 12 | Approved with use of ACC03. |
| Options | Please contact factory. |

Dimensions: Inches (mm)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mallory Sonalert:](#)

[SC628NDP](#) [SC628NDPR](#)