


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0757830040](#)
Status: **Active**
Overview: [iPass Connector System](#)
Description: iPass I/O Surface Mount Receptacle, Right Angle, Internal Assembly with Shell, 26 Circuit, 0.38µm Gold (Au), Through Hole Option, Tail Length 2.79mm, Universal Key

Documents:
[3D Model](#)
[Drawing \(PDF\)](#)
[Product Specification PS-75783-001-001 \(PDF\)](#)
[Packaging Specification PK-75783-002 \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	I/O Connectors
Series	75783
Application	Wire-to-Board
Comments	Positive or passive latching cable available
Component Type	Receptacle
Electrical Model	Yes
Overview	iPass Connector System
Product Name	iPass, Mini Multi-Lane, PCI Express
Type	N/A
UPC	191128091763
Physical	
Circuits (Loaded)	26
Circuits (maximum)	26
Color - Resin	Black
Durability (mating cycles max)	50
Flammability	94V-0
Gender	Female
Keying to Mating Part	Yes
Lock to Mating Part	None
Material - Metal	Copper-Nickel-Zinc, High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	2.586/g
Number of Rows	2
Orientation	Right Angle
PC Tail Length	2.79mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	2.36mm
Packaging Type	Embossed Tape on Reel
Panel Mount	No
Pitch - Mating Interface	0.80mm
Pitch - Termination Interface	0.80mm
Plating min - Mating	0.381µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Ports	1
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40°C to +80°C

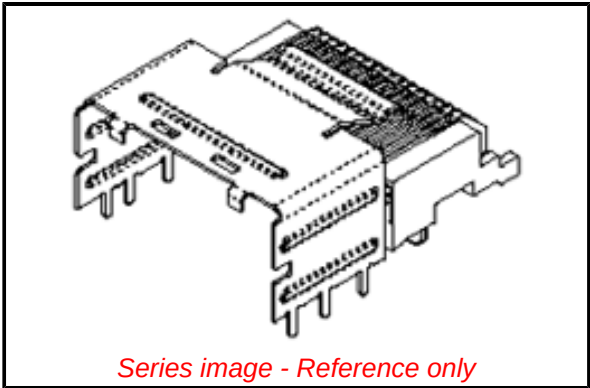

Series image - Reference only

EU ELV
Not Relevant

EU RoHS
Compliant
REACH SVHC
Not Contained Per -
ED/30/2017 (7 July
2017)
Halogen-Free
Status
Low-Halogen
**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any
non-product compliance questions.

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series
[75783 Series](#)

Use With
iPass Cable Assemblies, [79575](#) , [79576](#) ,
[74562](#) , [74563](#) , [79536](#) , [74573](#) ,

Termination Interface: Style	Surface Mount and Through Hole
Waterproof / Dustproof	No
Wire Insulation Diameter	N/A
Wire Size AWG	N/A
Electrical	
Current - Maximum per Contact	0.5A
Grounding to Panel	None
Voltage - Maximum	30V AC (RMS)/DC
Solder Process Data	
Duration at Max. Process Temperature (seconds)	020
Lead-freeProcess Capability	REFLOW
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	260
Material Info	
Reference - Drawing Numbers	
Electrical Model Document	EE-75586-001
Packaging Specification	PK-75783-002
Product Specification	PS-75783-001-001
S-Parameter Model	SP-75586-001
Sales Drawing	SD-75783-001

This document was generated on 02/27/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[75783-0040](#)