


WIRING SCHEDULE		
OUTLET		SIDE
1	+	RIBBED
2	-	SMOOTH

1. PACKAGING ACC. TO TE SPEC.107-18032
BUNDLE EVERY 25 ASSEMBLIES WITH A RUBBER BAND
2. ELECTRICAL TEST CONTAINING "SHORT CIRCUIT TEST, CONTINUITY
AND ACCURATE CAVITY ASSIGNMENT TEST" ACC. TO
TE-SPEC.108-18857, SUBSECTION 3.1.1

3 WIRING SCHEDULE AS SHOWN

16.0 FT	±3.84	2181198-8
14.0 FT	±3.36	2181198-7
12.0 FT	±2.88	2181198-6
10.0 FT	±2.4	2181198-5
8.0 FT	±1.92	2181198-4
6.0 FT	±1.44	2181198-3
4.0 FT	±.96	2181198-2
2.0 FT	±.48	2181198-1
"L"	TOLERANCES [INCHES]	TE P/N

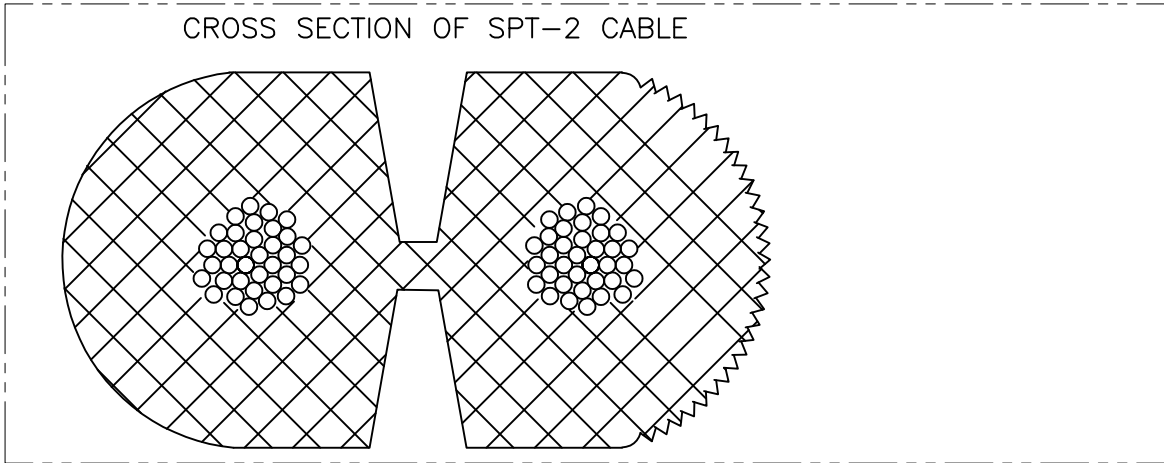

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN E.C. CLAYBAUGH 16/JUN/11	<div>TE Connectivity</div>		
DIMENSIONS: INCHES		CHK P. BECKER 13/JUL/11			
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		CABLE ASSY, NECTOR, LV-2, OUTLET - PIGTAIL		
	MATERIAL -		FINISH -		
		APVD P. BECKER 01/AUG/11	PRODUCT SPEC		
		APPLICATION SPEC		RESTRICTED TO	
		WEIGHT -	SIZE A2	CAGE CODE 00779	DRAWING NO C=2181198
		CUSTOMER DRAWING			SCALE N.T.S.
		SHEET 1 of 1			REV A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2181198-5](#)