
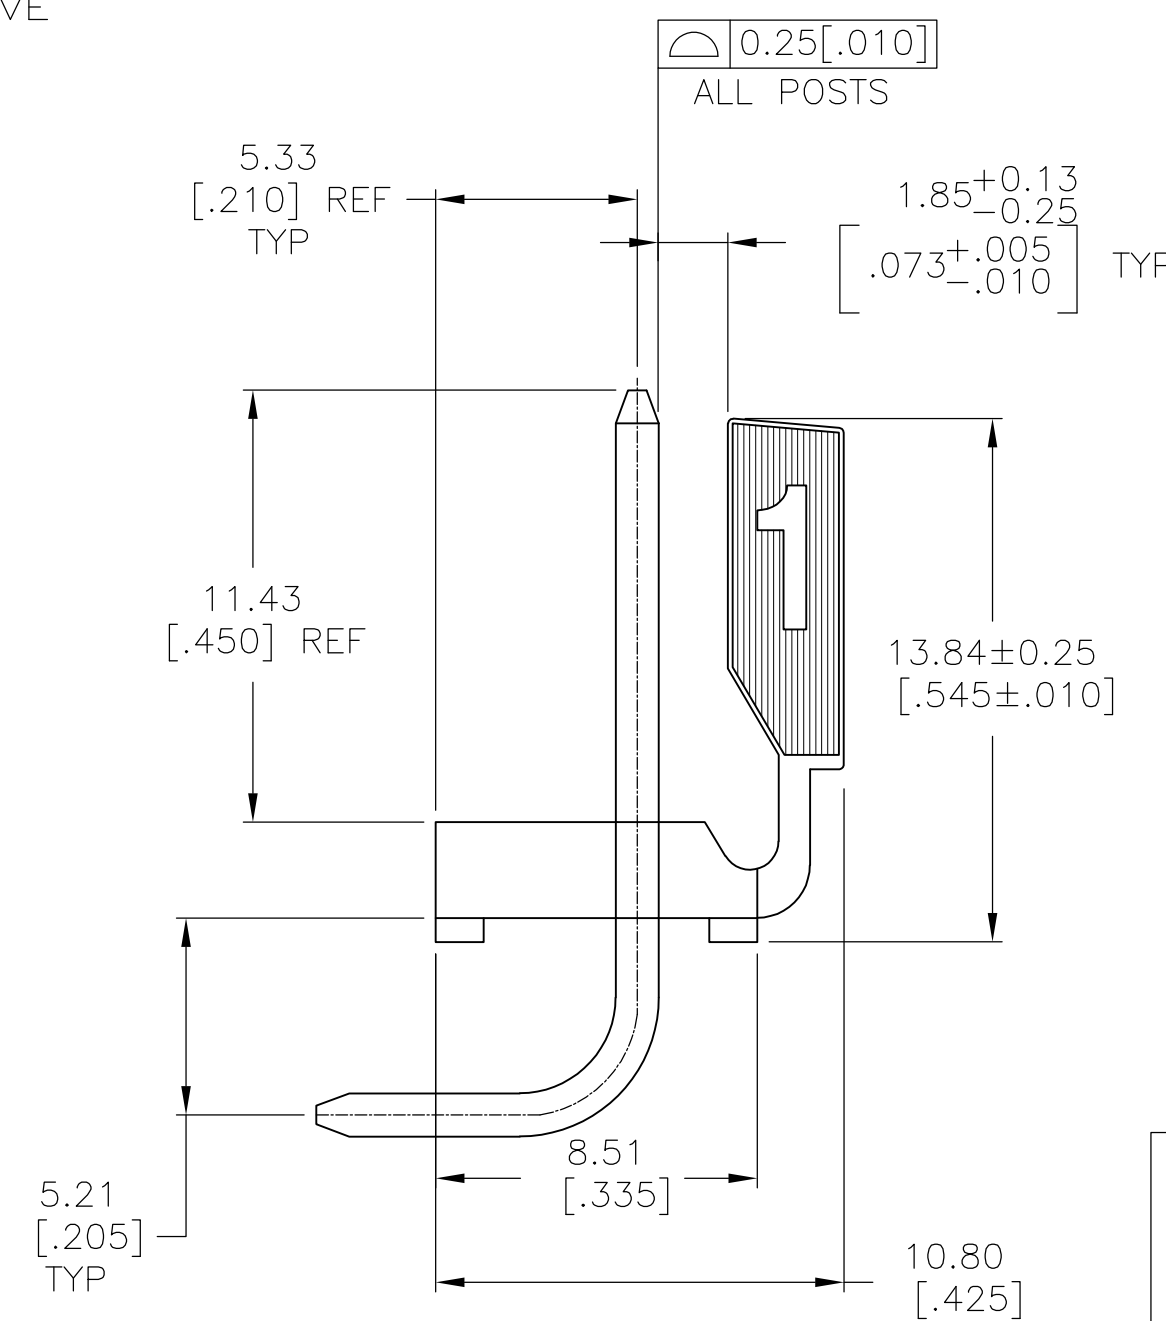
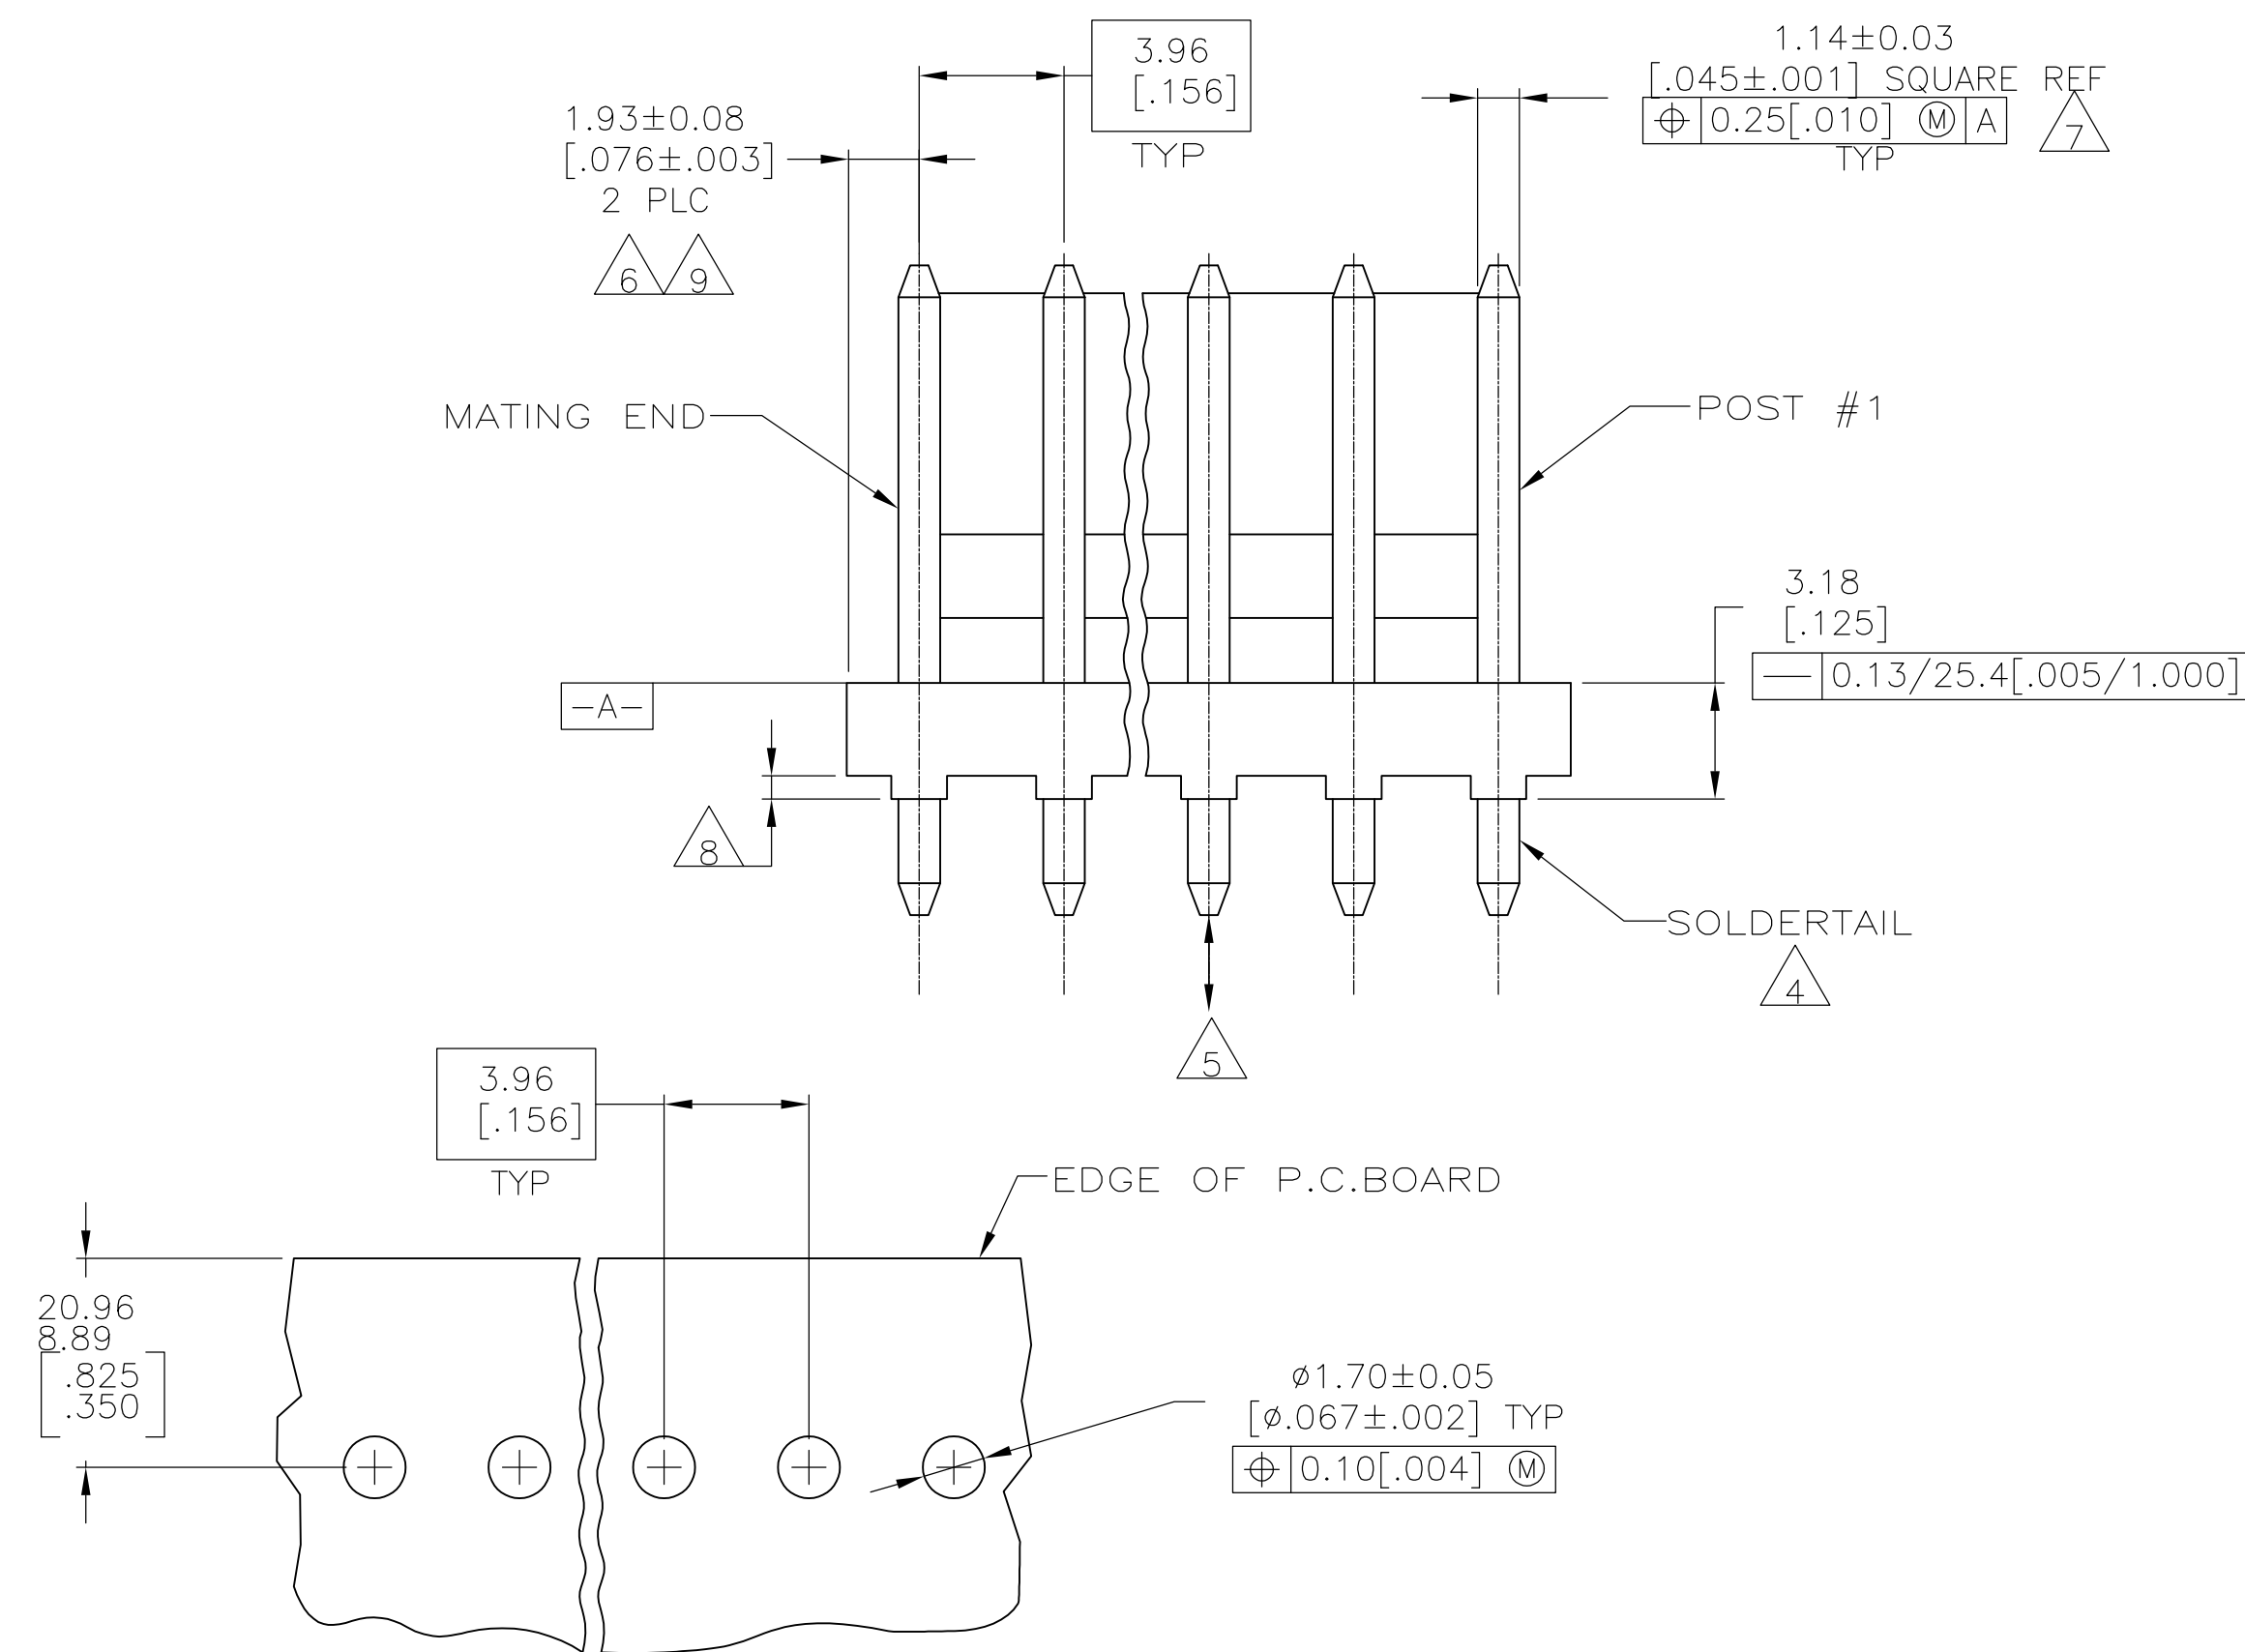
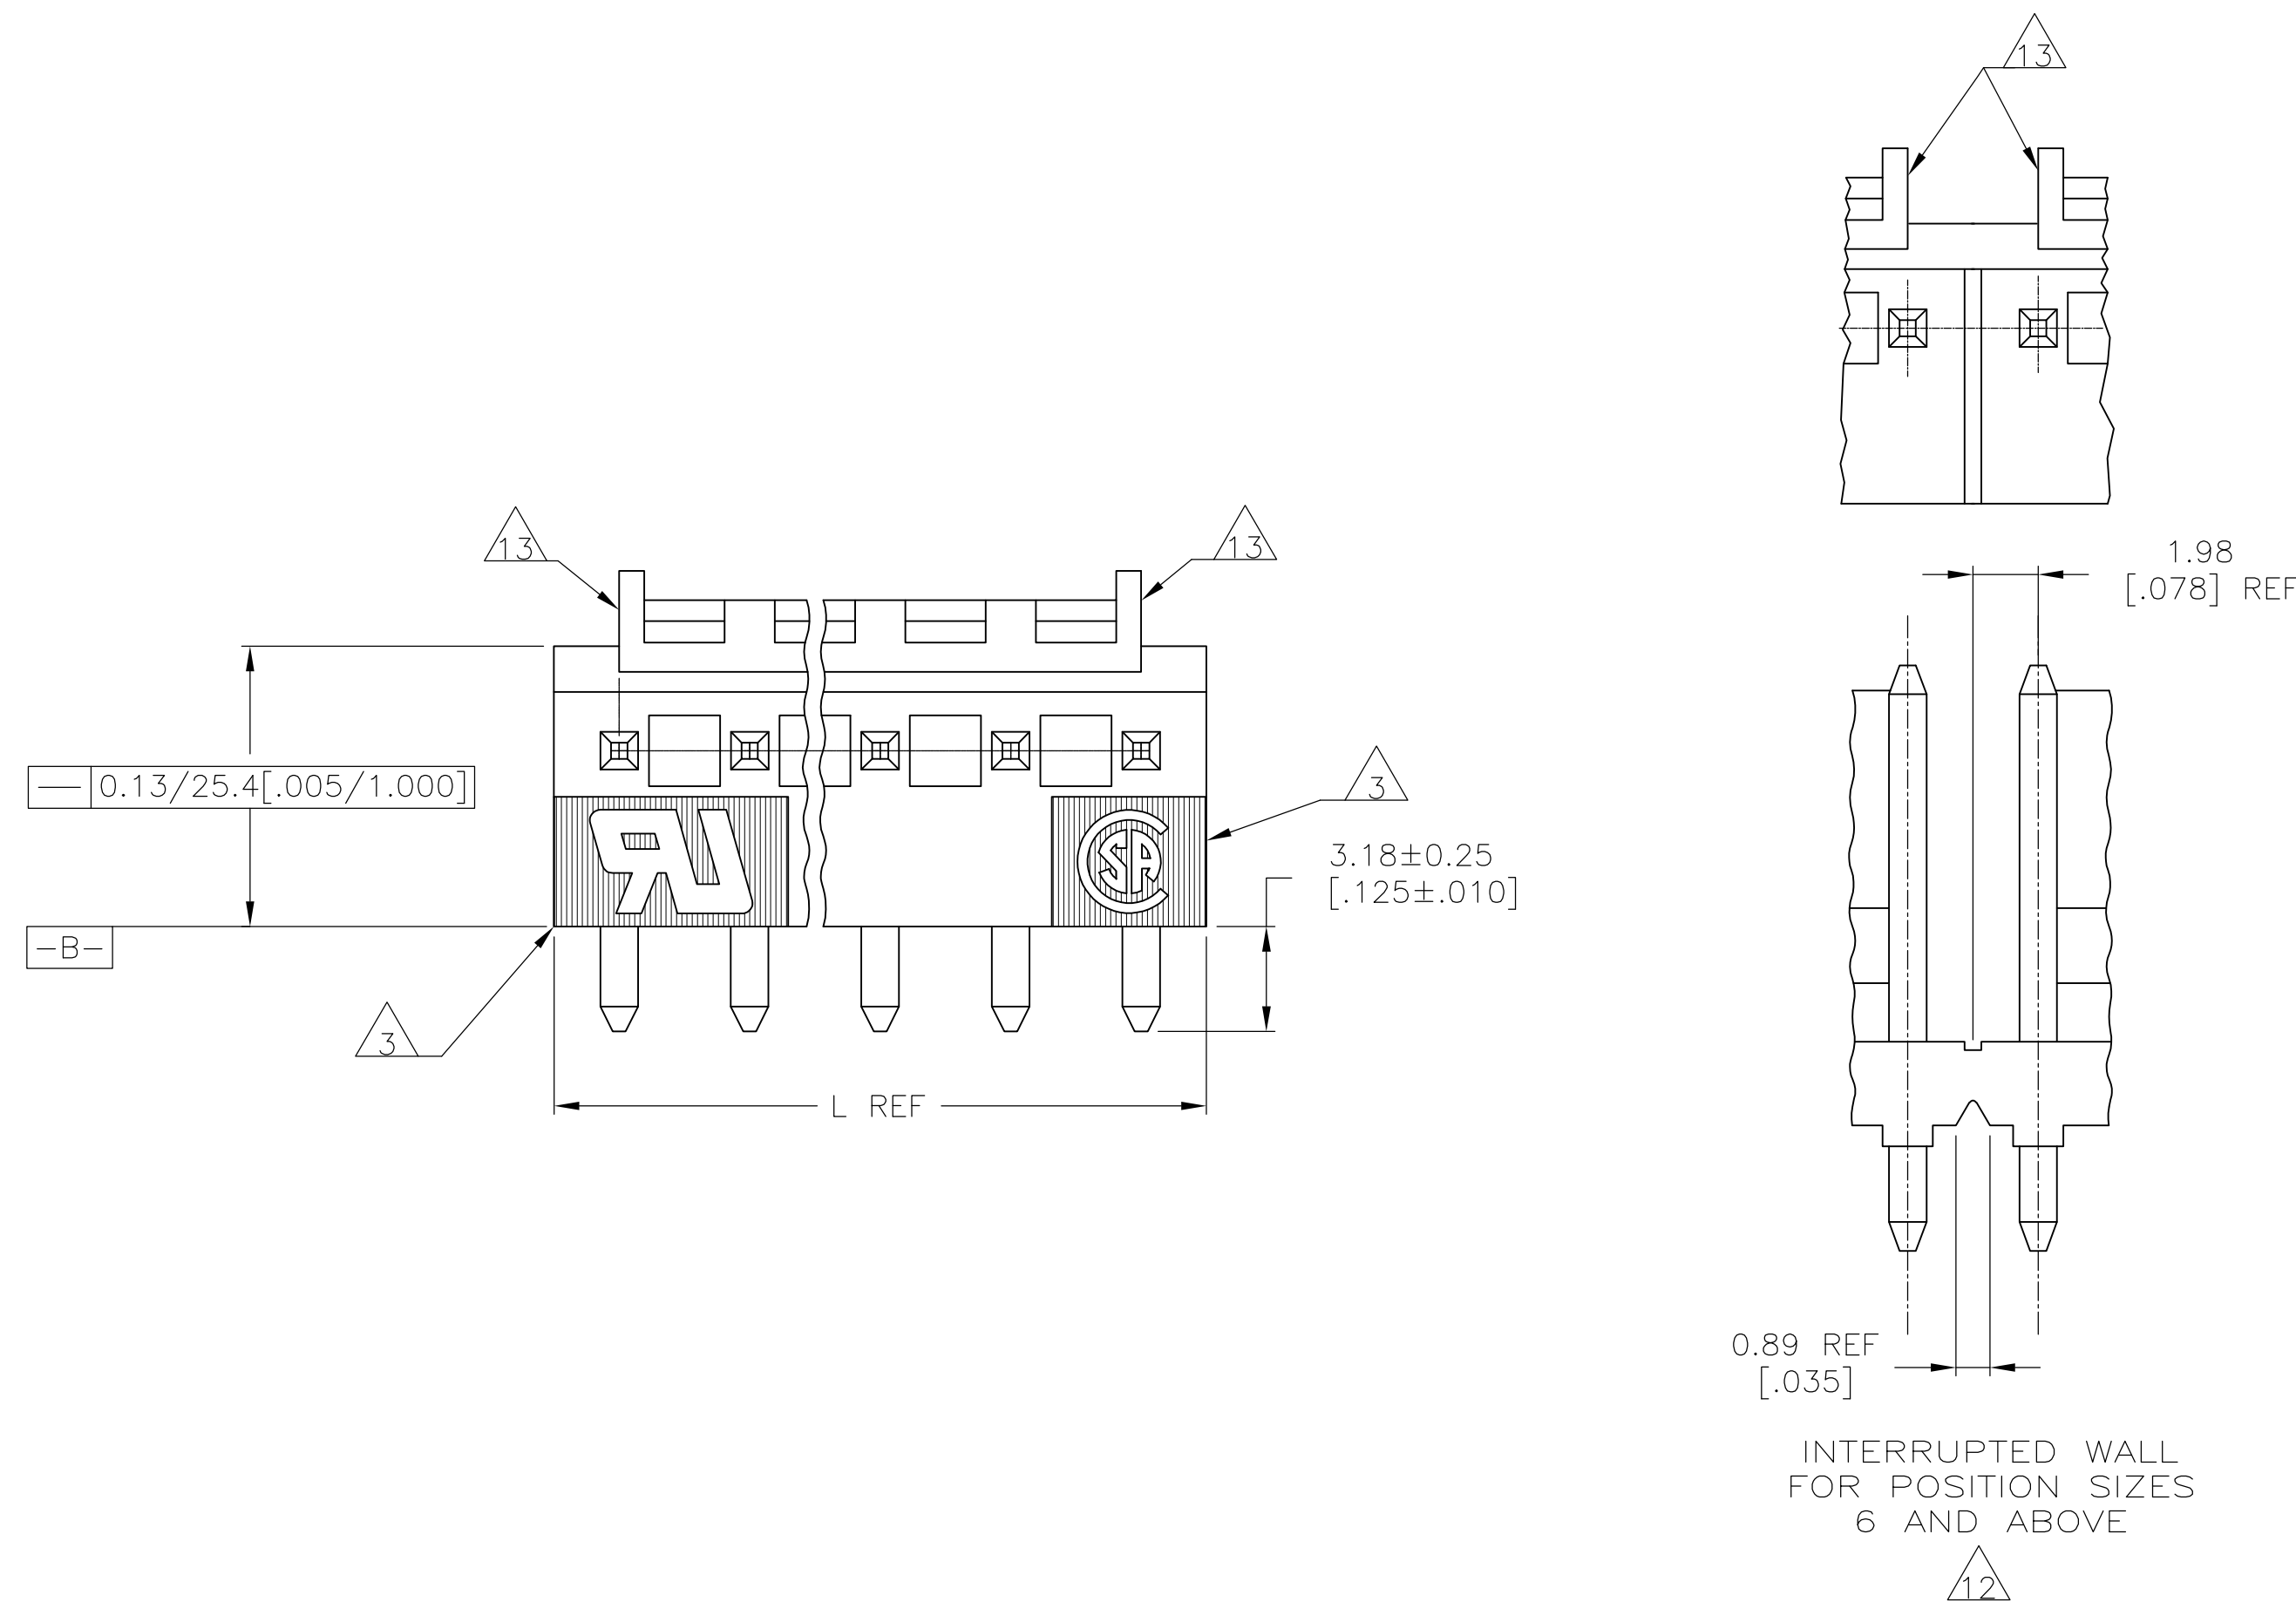


LOC	DIST	REVISIONS					
CM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			E3	REVISED PER ECR-15-006687	21OCT2015	NK	NL



OBSOLETE		4&5, 7&8, 11&12, 14&15	71.20	[2.803]	18	-4-644613-8-	
		4&5, 7&8, 10&11, 13&14	67.23	[2.647]	17	-4-644613-7-	
		4&5, 8&9, 12&13	63.27	[2.491]	16	-4-644613-6-	
		4&5, 8&9, 11&12	59.31	[2.335]	15	-4-644613-5-	
		4&5 7&8, 10&11	55.35	[2.179]	14	-4-644613-4-	
		4&5 7&8, 10&11	51.38	[2.023]	13	-4-644613-3-	
		4&5, 8&9	47.42	[1.867]	12	-4-644613-2-	
		4&5, 7&8	43.46	[1.711]	11	-4-644613-1-	
		3&4, 7&8	39.50	[1.555]	10	-4-644613-0-	
		3&4, 6&7	35.53	[1.399]	9	-3-644613-9-	
		4&5	31.57	[1.243]	8	-3-644613-8-	
		4&5	27.61	[1.087]	7	-3-644613-7-	
		3&4	23.65	[.931]	6	-3-644613-6-	
		NONE	19.69	[.775]	5	3-644613-5-	
 SUPERSEDED  OBSOLETE  SUPERSEDED  OBSOLETE  SUPERSEDED  OBSOLETE		NONE	15.72	[.619]	4	3-644613-4-	
		NONE	11.76	[.463]	3	3-644613-3-	
		NONE	7.80	[.307]	2	3-644613-2-	
		4&5, 7&8, 11&12, 14&15	71.20	[2.803]	18	-1-644613-8-	
		4&5, 7&8, 10&11, 13&14	67.23	[2.647]	17	-1-644613-7-	
		4&5, 8&9, 12&13	63.27	[2.491]	16	-1-644613-6-	
		4&5, 8&9, 11&12	59.31	[2.335]	15	-1-644613-5-	
		4&5 7&8, 10&11	55.35	[2.179]	14	-1-644613-4-	
		4&5 7&8, 10&11	51.38	[2.023]	13	-1-644613-3-	
		4&5, 8&9	47.42	[1.867]	12	-1-644613-2-	
		4&5, 7&8	43.46	[1.711]	11	-1-644613-1-	
		3&4, 7&8	39.50	[1.555]	10	-1-644613-0-	
		3&4, 6&7	35.53	[1.399]	9	-644613-9-	
		4&5	31.57	[1.243]	8	-644613-8-	
OBSOLETE		4&5	27.61	[1.087]	7	-644613-7-	
		3&4	23.65	[.931]	6	-644613-6-	
		NONE	19.69	[.775]	5	-644613-5-	
		NONE	15.72	[.619]	4	-644613-4-	
		NONE	11.76	[.463]	3	-644613-3-	
		NONE	7.80	[.307]	2	644613-2-	
		FINISH	BACKWALL INTERRUPTION(S) BETWEEN POST		L	NO. OF POSITIONS	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: 2-12-93 L. SMITH CHK: 2-12-93 R. SWING		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 9 PLC ± - 1 PLC ± - 2 PLC ± 0.1% [.005] 3 PLC ± - 4 PLC ± - 5 PLC ± - ANGLES ± -		NAME: MTA-156 HEADER ASSEMBLY, POLARIZED LOCK, RIGHT ANGLE FRONT BEND, .045 SQUARE POST, TIN-LEAD PLATED, WITHOUT RETENTION PEGS	
		APVD: 15-12-93 D. CLARK PRODUCT SPEC: - APPLICATION SPEC: -		SIZE: A1 CAGE CODE: 00779 DRAWING NO: 644613	
MATERIAL: 		FINISH: 		RESTRICTED TO: -	
CUSTOMER DRAWING		SCALE: 5:1		SHEET 1 of 1 REV F	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-644613-9](#)