

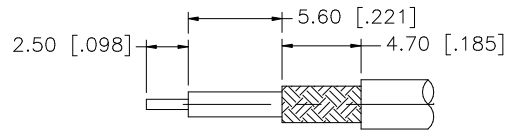
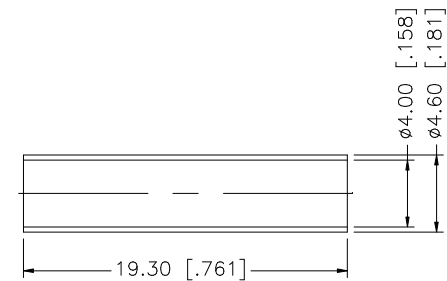







REV.	DATE	DESCRIPTION
A	05/10/01	MODIFY INSULATOR/CONTACT PIN DIMENSIONS
B	01/30/04	UPDATE DRAWING FORMAT



RECOMMENDED
CABLE STRIPPING DIM'S

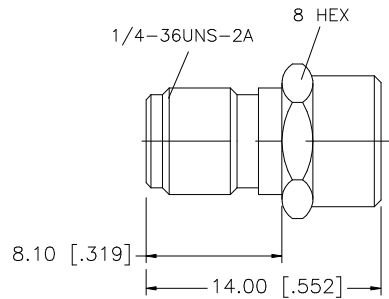

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex				
8	HEAT SHRINK TUBE			1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	DRAWN	G.R.S.					
7	FERRULE	COPPER	GOLD	1		CHECKED			PART DESCRIPTION SMA CRIMP JACK (FOR RG-178B/U, 196A/U CABLE)			
6	HEX NUT	BRASS	GOLD	1		ISSUED						
5	BARREL	BRASS	GOLD	1		SHEET	1 OF 1		PART NO. 132279			
4	INSULATOR	TEFLON	NATURAL	1								
3	CONTACT PIN	BER. COPPER	GOLD	1				DWG. NO. 132279.DWG				
2	INSULATOR	TEFLON	NATURAL	1								
1	BODY	BRASS	GOLD	1				REV. B	SIZE A	SCALE NA		
	DESCRIPTION	MATERIAL	FINISH	QTY		CAD FILE	C:/132/132279.DWG					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[132279](#)