





All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor.
Property of FCI. Copyright FCI.

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire.
Propriete de c FCI. Droits de reproduction FCI.

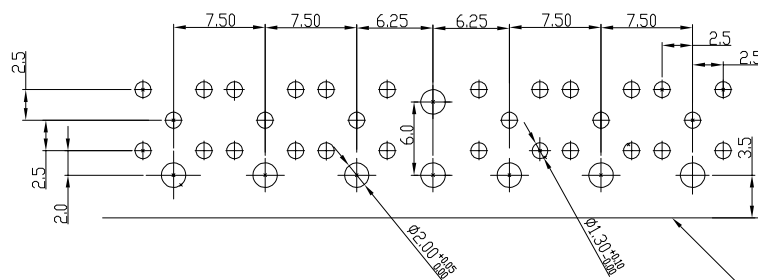

LAY-OUT
P.C.B.- HOLE

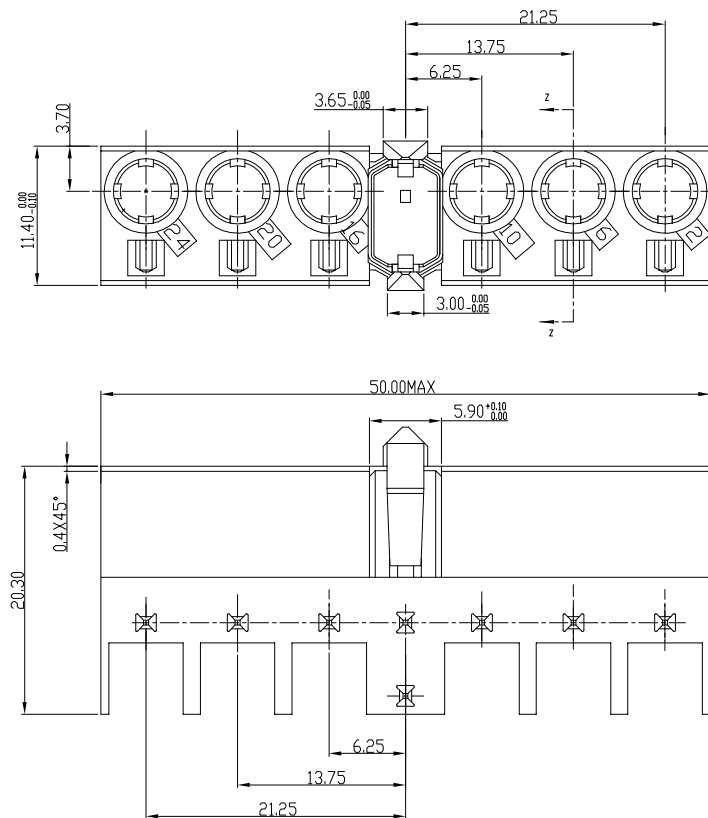

NOTES

1. THIS PRODUCT IS CSA APPROVED.
2. THIS PRODUCT IS UL RECOGNIZED.
3. MATERIAL: PLOYESTER 30% GLASS FILLED REINFORCED.
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
5. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 30 SECONDS IN A VAVE SOLDER APPLICATION WITH A 1.6MM MINIMUM THICK CIRCUIT BOARD

Material PLOYESTER 30% GLASS FILLED			Spec ref				
Mat code		✓	tolerance	projection			
Heattreat			1DEC+0.2 1DEC 2DEC ± 0.10 2DEC ANGLES+1*HDEKEN				
Plating/Finish							
Dr	W.Panis	07-04-92			size A4	Scale 1.500	
Eng			Product family MILLIPICS				
Chr			Model Name		ECN		
Appr			Model Revision		REL Level		
		title	MILLIPACS 2/FEMALE BODY/TYPE L		dwg no	BSC201418004	Rev C
Pro/E file		catalog no		HM2R04P1LF	CUMSTOMER		sheet 1 of 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[HM2R04P1LF](#)