


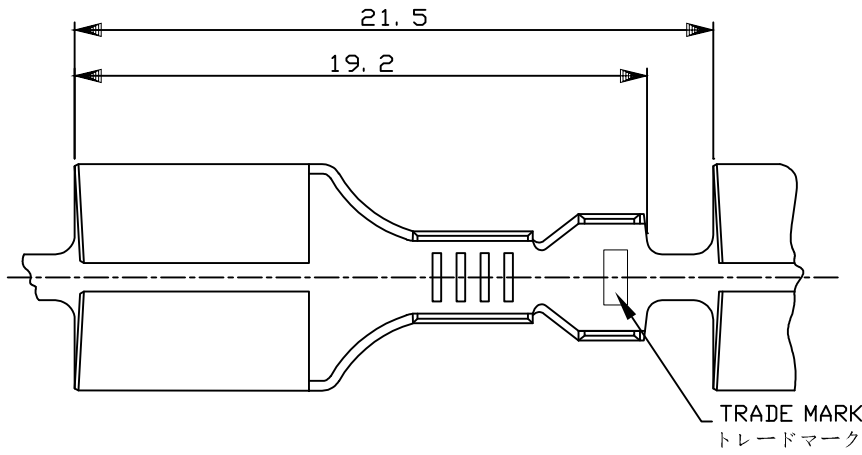



LOC J	DIST —	REVISIONS 変更			DATE	DWN	APVD
		P	LTR	DESCRIPTION			
			F2	REVISED PER ECR-15-006361	23APR15	LP	TD
			F3	REVISED PER ECR-16-015552	3NOV16	DL	T.D



SECT. 断面 A-A

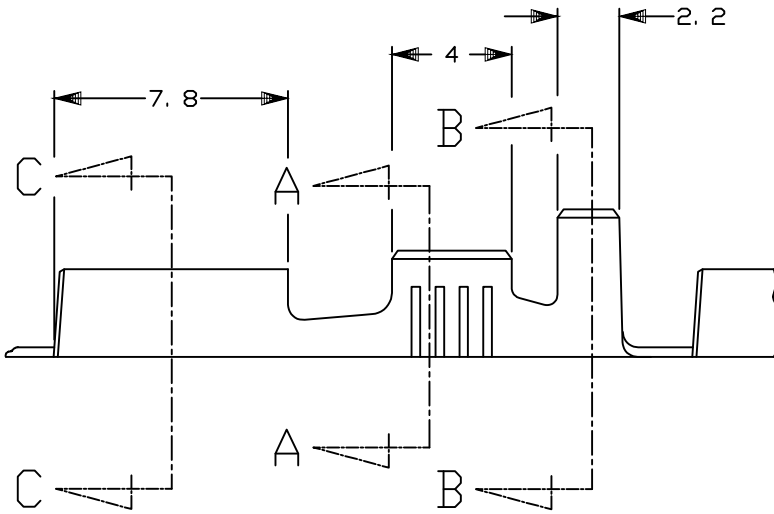

SECT. 断面 B-B

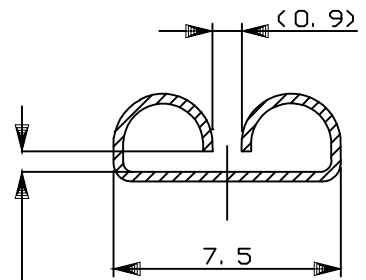

この寸法は 合力によって規定する。
THIS DIMENSION IS CONTROLLED WITH MATING FORCE

断面 C-C

NOTE;

- THE MATING TAB P/N 170256, 170257 (FOR MULTIPLE Pos.)
- REVERSE REEL
- STRESS RELIEVING FINISH IS SUBJECT TO CHANGE BY THE TYPE OF STRESS RELIVING PROCESS
INERT GAS FURNACE- - - -MATTE
ATOMOSPHERIC FURNACE FOLLOWD BY ACID PICKLE- - - -BRIGHT SECT.
- SEPARATE PAPER TYPE

注記

- 嵌合する相手タブは型番170256及び170257で多極用として使用される。
- 逆巻きリール
- ストレス除去処理
処理法により外観が変わります。
不活性ガス加熱方式 -- 無光沢
大気加熱方式 -- 光沢
- OBSELETE

—	—	170258-4
TIN PLATING	—	170258-3
TIN PLATING 錫めつき	—	3-170258-1
—	—	170258-2
—	BRASS THICKNESS 黄銅 板厚0.32	170258-1
FINISH 仕上	MATERIAL 材質	PART NO. 型番

抱合電線切断面積(WIRE RANGE) 2-3.37 mm ² (AWG#14-12)	被覆外径(INSULATION DIA.) 2.9-3.8 mmΦ
--	--------------------------------------

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

COPYRIGHT - By -

DIMENSIONS: 単位: 耗 mm	DWN Y.YAMADA	03APR2007	MATERIAL 材料	SEE TABLE	FINISH 仕上	SEE TABLE	3				
	CHK MANABA SAKAE	03APR2007	TE Connectivity NAME 名称 .250 SERIES RECEPTACLE WITHOUT LATCH .250 シリーズ リセプタクル ラッチなし								
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 10以下 : ±0.2 10を超え30以下 : ±0.25 30を超え100以下 : ±0.3 角度 : ±3°	APVD MANABA SAKAE	03APR2007					SIZE	A4	CAGE CODE	00779	DRAWING NO 番号
	PRODUCT SPEC 製品規格	APPLICATION SPEC 取付適用規格	WEIGHT	CUSTOMER DRAWING			SCALE 尺度	1:1	SHEET	1 OF 1	REV

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[170258-2 \(CUT STRIP\)](#) [170258-2 \(MOUSER REEL\)](#)