



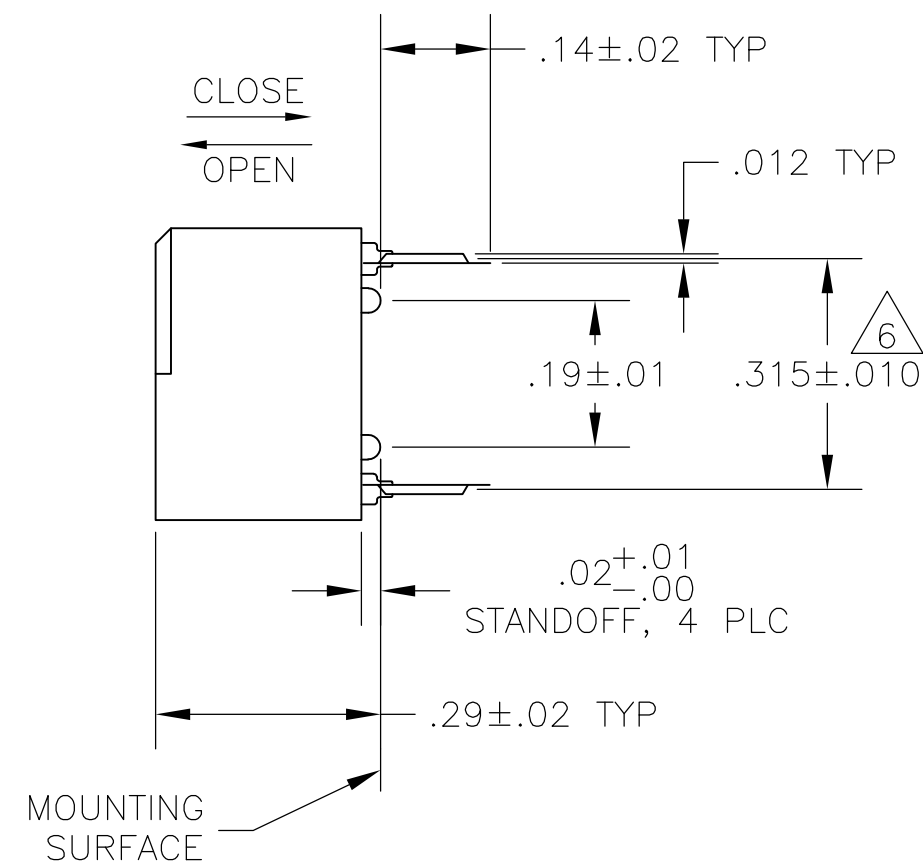

	NO POSITION MARKING.
	NO PART NO. MARKING.
	STRIPPABLE TAPE SEAL, SEE FIGURE 8.
	OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

- 1 FOR ADDITIONAL SPECIFICATIONS SEE AMP PRODUCT SPEC 108-7519.
- 2 SWITCH SHOWN IN OPEN POSITION.
- 3 ALL CHARACTERS AND ROCKERS ARE WHITE, HOUSING IS BLACK.
- 4 STAMPING WILL VARY ON 2 AND 3 POSITION TOPS DUE TO SPACE RESTRICTIONS.
- 5 STRIPPABLE TRANSPARENT SEAL, SEE FIG 6.
- 6 .315 DIMENSION APPLIES AT TERMINAL TIPS. TERMINALS ARE $.300^{+.010}_{-.000}$ AT MOUNTING SURFACE.

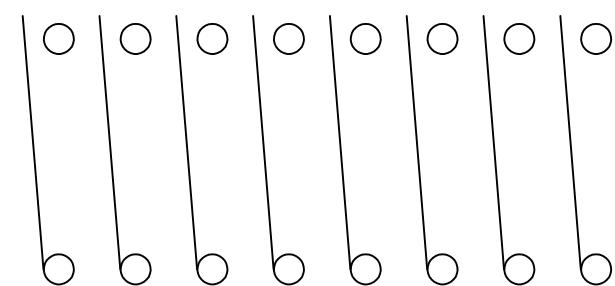

CONTACT ARRANGEMENT

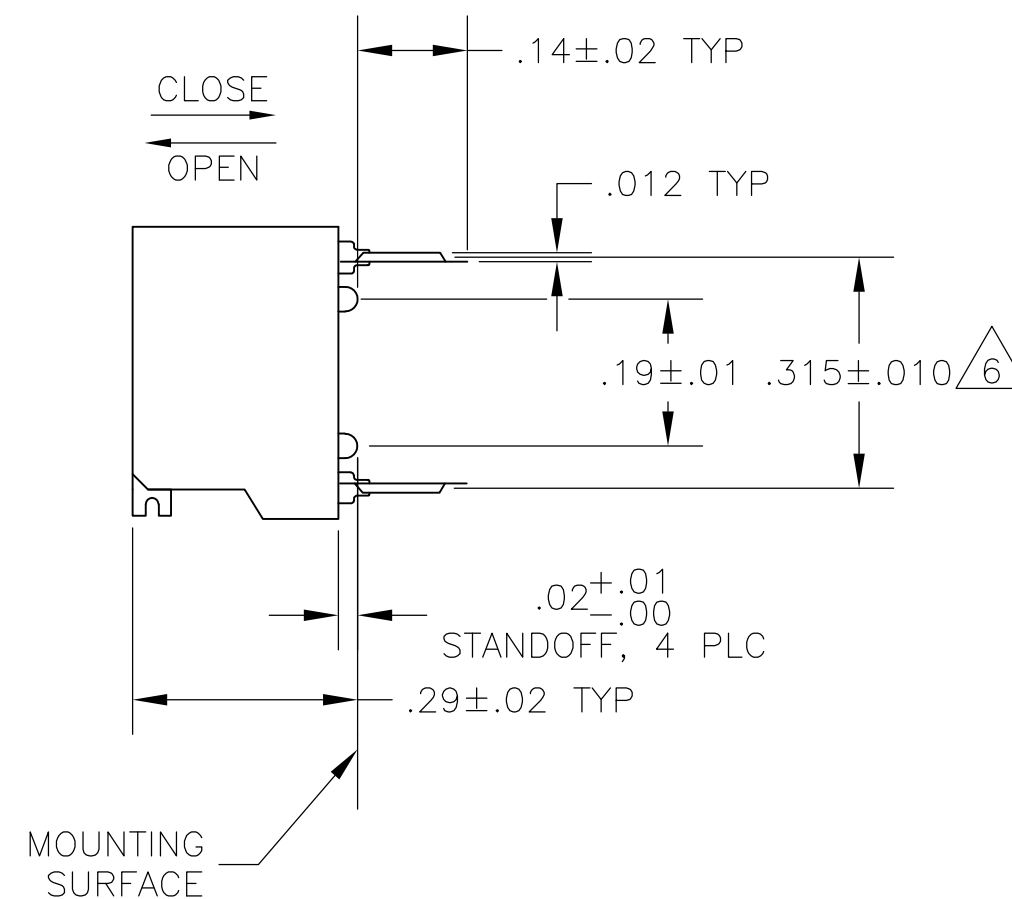


FIG 2

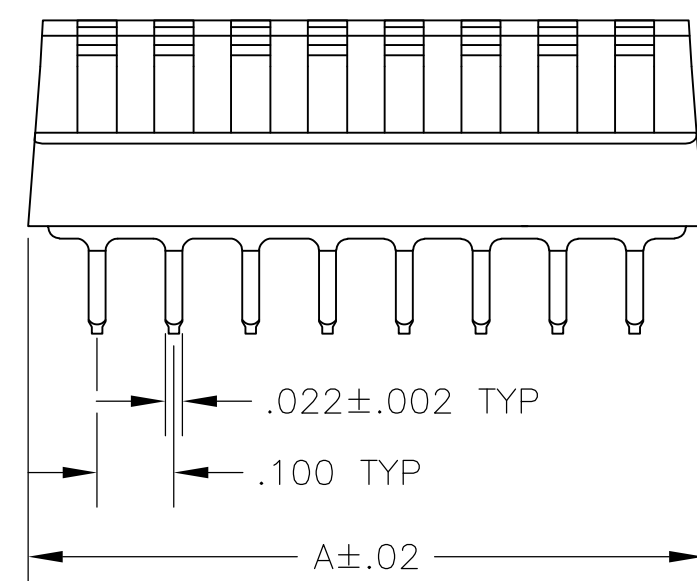


		FIG 2	FIG 3A& 7	—	1.08	10	6—435802—3
		FIG 1	FIG 3B		.88	8	3—435802—8
	SUPSD BY 1—435802—6	—FIG 2	 		.58	5	3—435802—1
	 OBSOLETE	—FIG 2	 		.88	8	3—435802—0
	SUPSD BY 2—5435802—9	—FIG 2	 		.48	4	2—435802—9
	SUPSD BY 1—435802—0	—FIG 1		—	.28	2	2—435802—8
	OBSOLETE	FIG 1			.28	2	2—435802—7
	OBSOLETE	FIG 2			1.08	10	2—435802—6
	OBSOLETE	FIG 2	FIG 4	—	.88	8	2—435802—5
	OBSOLETE	FIG 2			.88	8	2—435802—4
	OBSOLETE	FIG 2	FIG 3A& 5	—	.48	4	2—435802—3
		FIG 2	FIG 3A		1.28	12	2—435802—2
		FIG 2			1.18	11	2—435802—1
		FIG 2			1.08	10	2—435802—0
		FIG 2			.98	9	1—435802—9
		FIG 2			.78	7	1—435802—8
		FIG 2			.68	6	1—435802—7
		FIG 2			.58	5	1—435802—6
		FIG 2			.48	4	1—435802—5
	SUPSD BY 435802—2	—FIG 2			.38	3	1—435802—4
	SUPSD BY 3—1437590—2	—FIG 1	FIG 3B		.28	2	1—435802—3
	 OBSOLETE	—FIG 2		—	1.28	12	1—435802—2
		FIG 1	FIG 3B	—	.28	2	1—435802—0
		FIG 2	FIG 3A		.88	8	435802—9
		FIG 2		—	1.08	10	435802—8
	SUPSD BY 5435802—7	—FIG 2		—	.98	9	435802—7
		FIG 2		—	.78	7	435802—6
		FIG 2		—	.68	6	435802—5
		FIG 2		—	.58	5	435802—4
		FIG 2		—	.48	4	435802—3
		FIG 2	FIG 3A	—	.38	3	435802—2
	435802—1 SHOWN	FIG 2	FIG 3A	—	.88	8	435802—1
		HOUSING	MARKING	PROTECTIVE SEAL	A	NO OF POSN	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. TALLEY 9-19-89		 TE Connectivity	
		CHK R. MILLER 9-19-89			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME SWITCH ASSY, DIP, TYPE C, 7000 SERIES, SPST, SIDE ACTUATED	
		APVD H. LEITER 9-19-89			
		PRODUCT SPEC			
		—			
		APPLICATION SPEC			
		—			
MATERIAL HOUSING & ROCKERS: POLYESTER CONTACTS: BERYLLIUM COPPER		FINISH CONTACTS; PLATED .000030 MIN GOLD IN CONTACT AREA OVER .000050 MIN NICKEL		SIZE A2	
		WEIGHT		CAGE CODE	
		—		DRAWING NO	
				00779	
				C-435802	
CUSTOMER DRAWING				RESTRICTED TO	
				—	
				SCALE	
				4:1	
				SHEET	
				1 of 2	
				REV	
				A1 2	

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

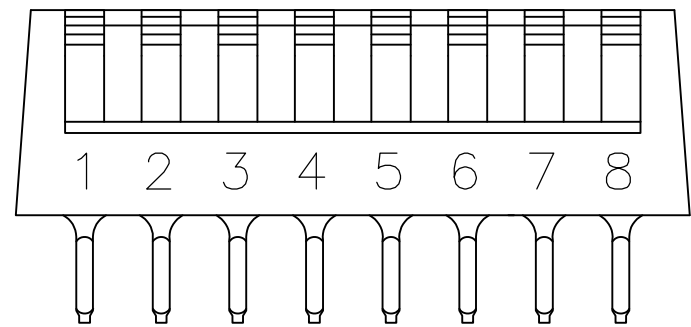


FIG 3A

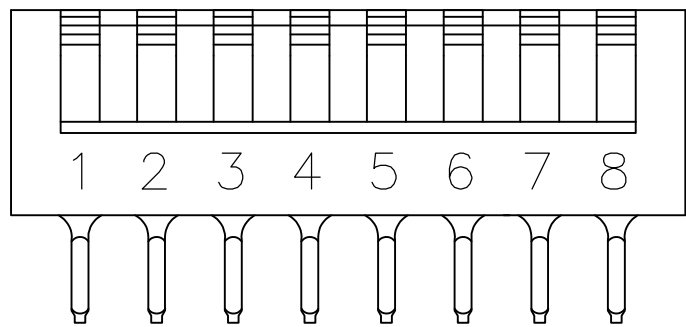


FIG 3B

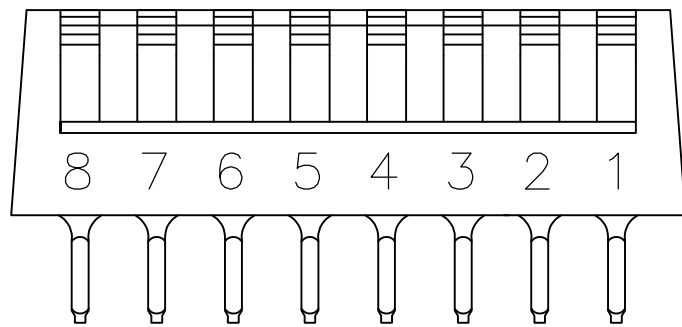


FIG 4



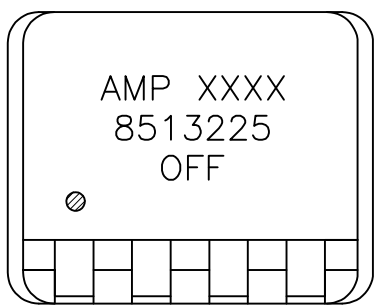


FIG 5

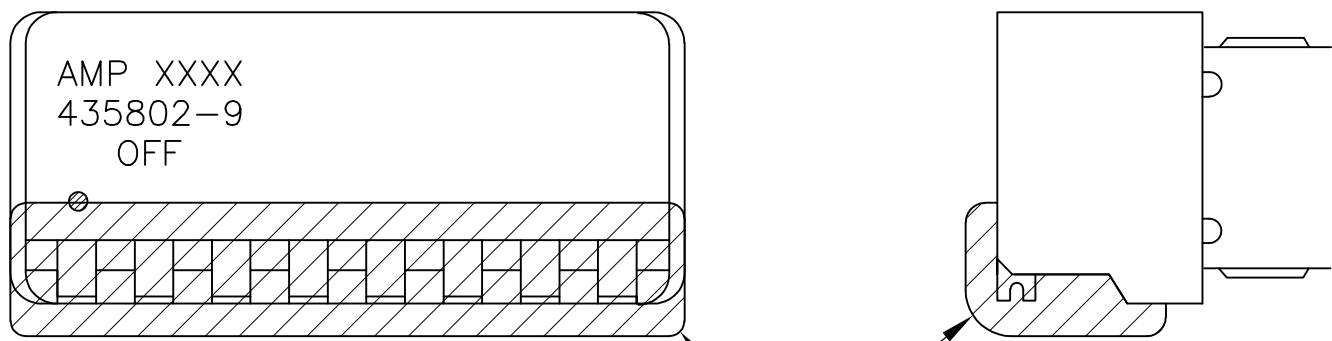

PROTECTIVE SEAL

FIG 6

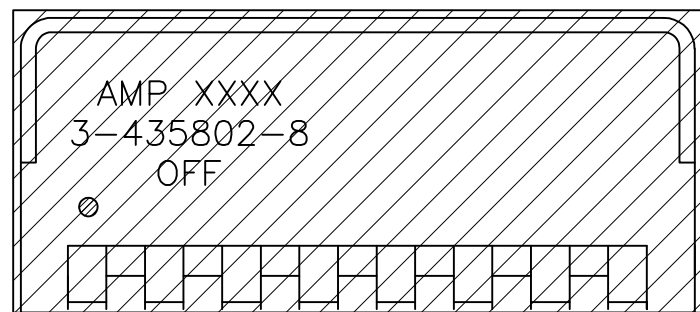

PROTECTIVE SEAL


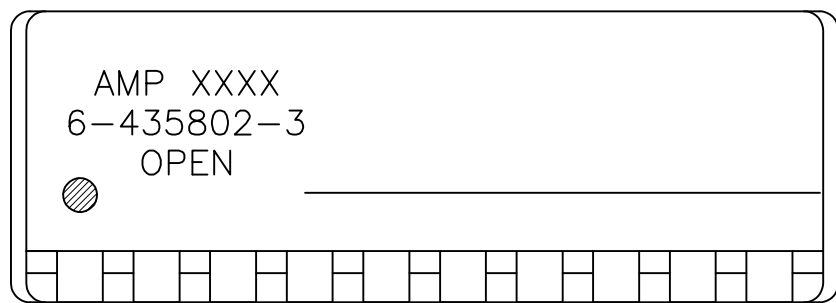



FIG 7

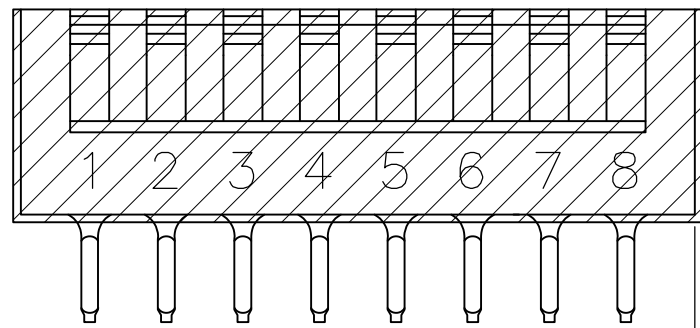

.010±.010

.005+.010
-.005
TYP

FIG 8

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. TALLEY 9-19-89	 TE Connectivity			
DIMENSIONS: INCHES		CHK R. MILLER 9-19-89				
		APVD H. LEITER 9-19-89	NAME SWITCH ASSY, DIP, TYPE C, 7000 SERIES, SPST, SIDE ACTUATED			
		PRODUCT SPEC				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	SIZE A2			
0 PLC ± -		—				
1 PLC ± -		—	CAGE CODE 00779			
2 PLC ± -		—				
3 PLC ± .005		—	DRAWING NO C-435802			
4 PLC ± -		—				
ANGLES ± -		—	RESTRICTED TO —			
FINISH		—				
MATERIAL SEE SHEET 1		WEIGHT —	SCALE 4:1			
SEE SHEET 1		—				
CUSTOMER DRAWING			SHEET 2 OF 2			
			REV AL2			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-435802-8](#)