
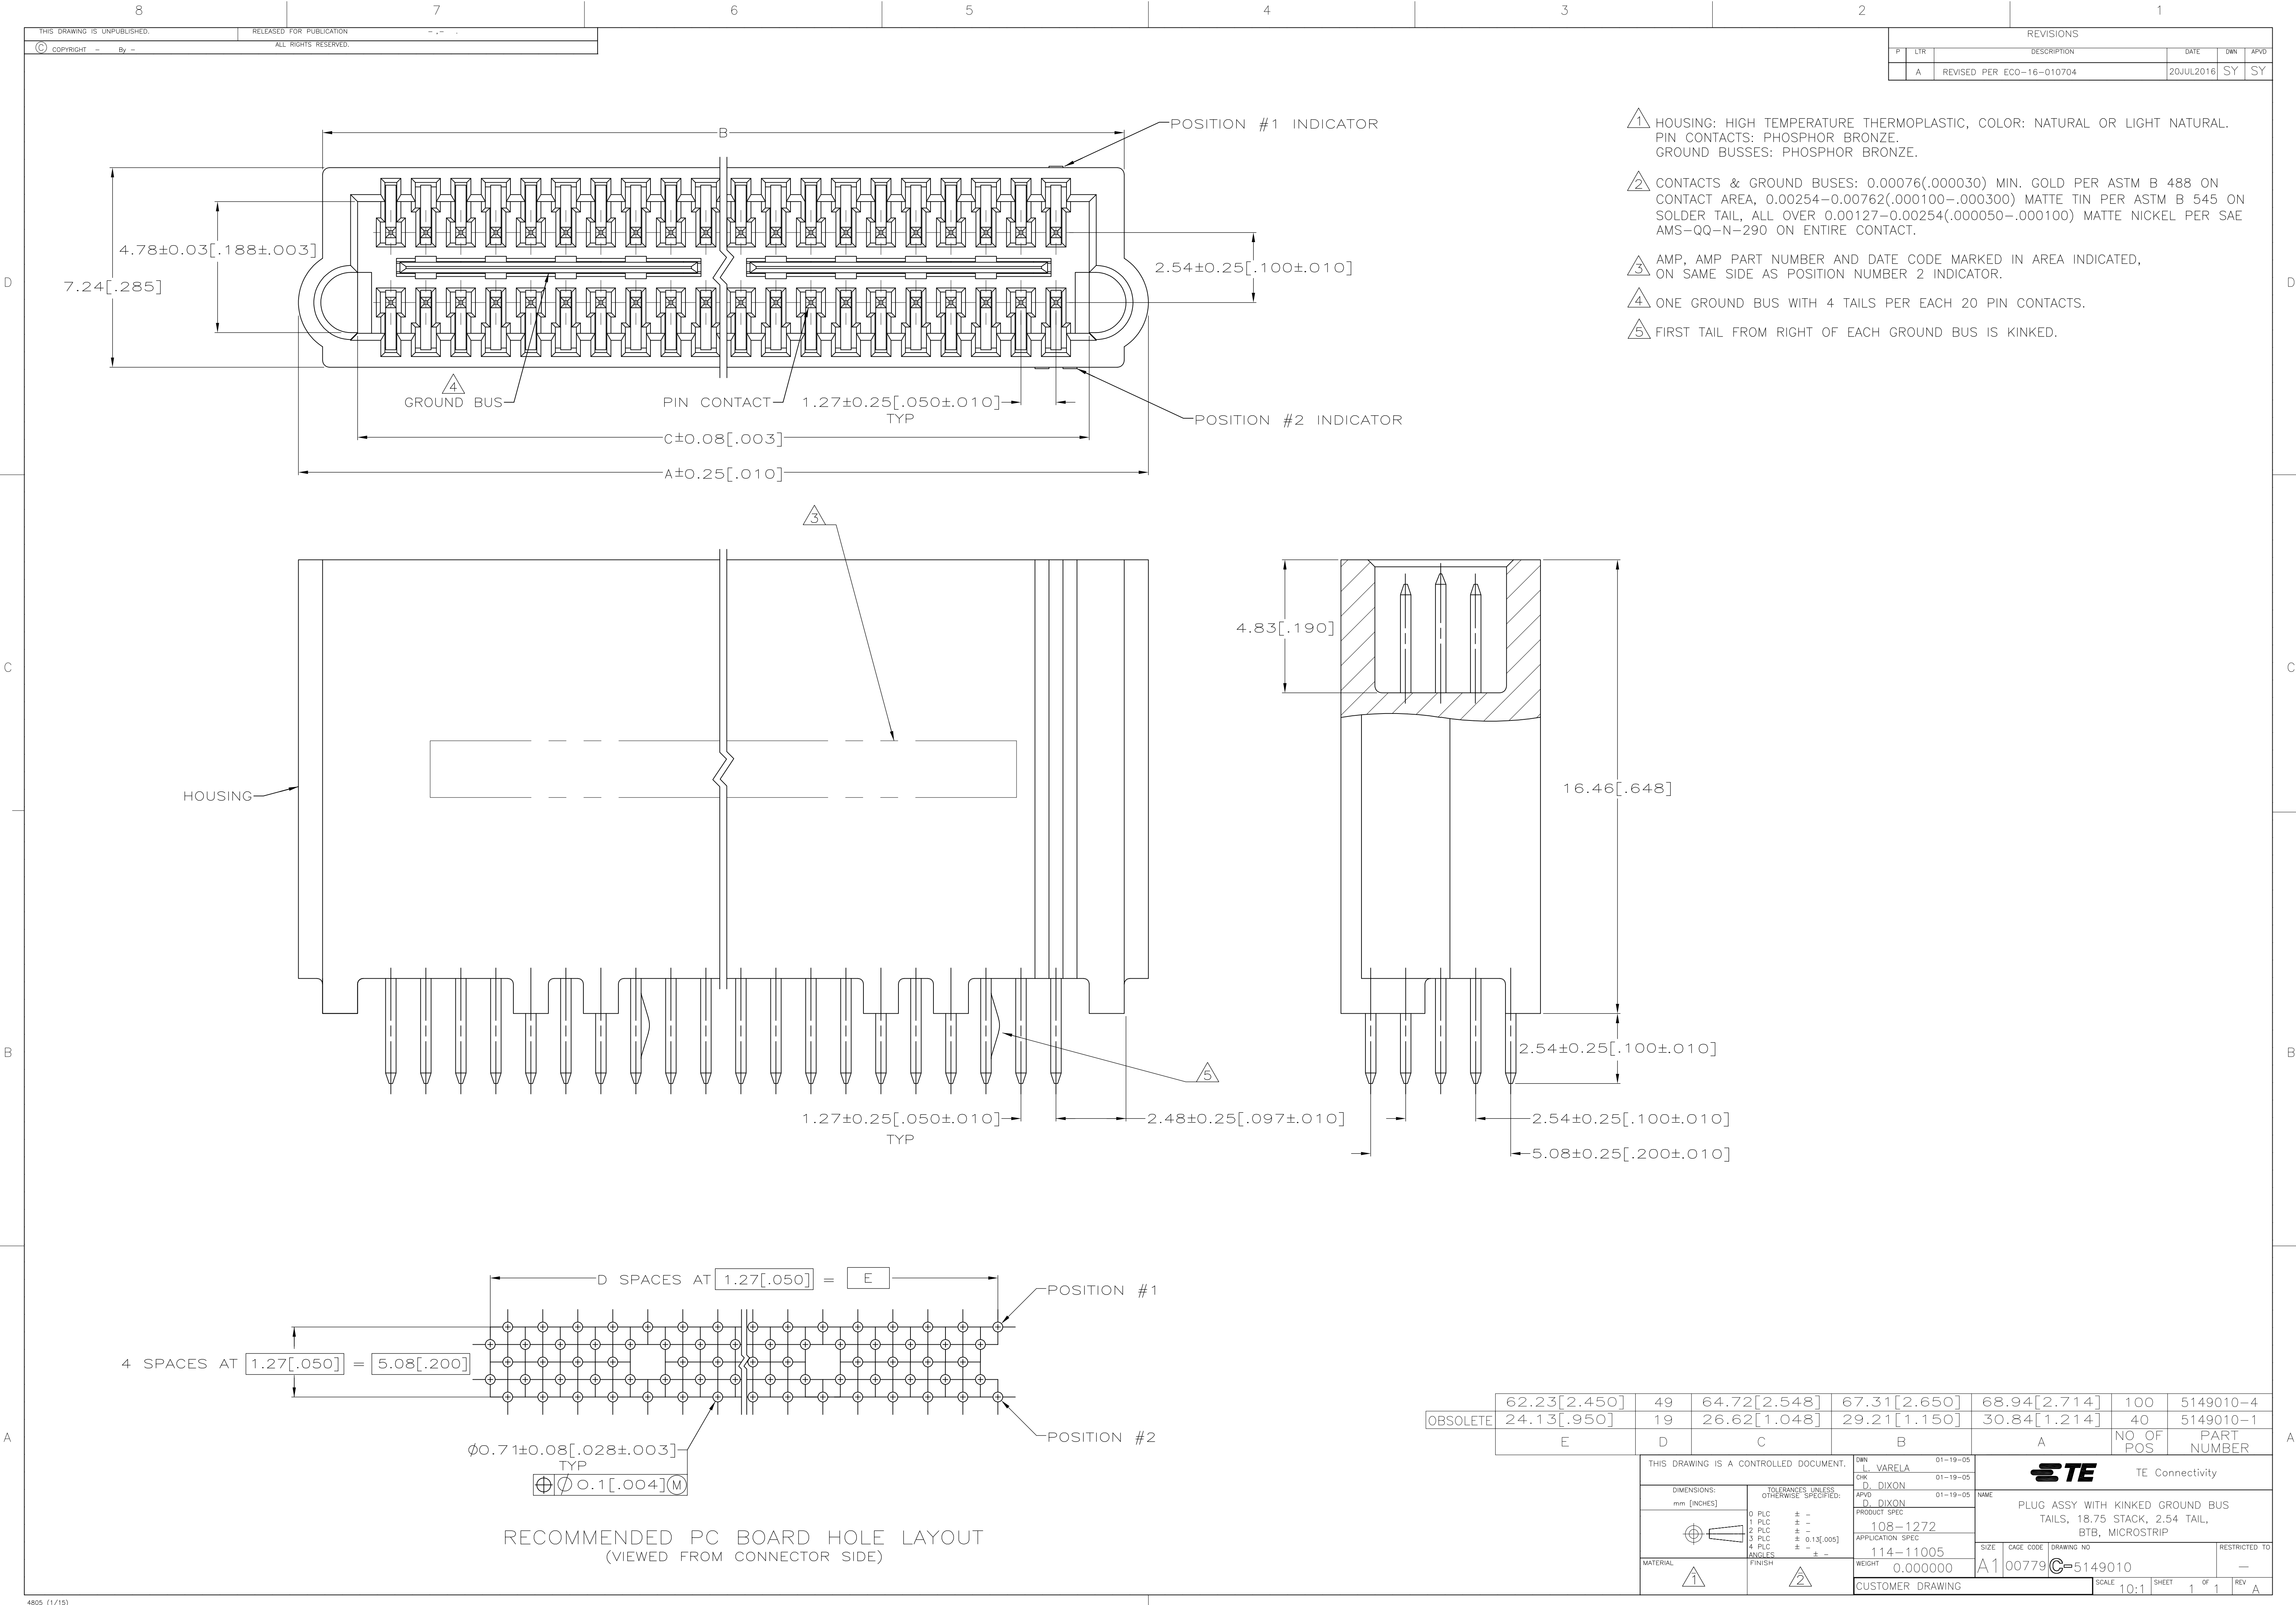




- 1 HOUSING: HIGH TEMPERATURE THERMOPLASTIC, COLOR: NATURAL OR LIGHT NATURAL.
PIN CONTACTS: PHOSPHOR BRONZE.
GROUND BUSSES: PHOSPHOR BRONZE.
- 2 CONTACTS & GROUND BUSES: 0.00076(0.00030) MIN. GOLD PER ASTM B 488 ON CONTACT AREA, 0.00254-0.00762(0.00100-0.00300) MATTE TIN PER ASTM B 545 ON SOLDER TAIL, ALL OVER 0.00127-0.00254(0.00050-0.00100) MATTE NICKEL PER SAE AMS-QQ-N-290 ON ENTIRE CONTACT.
- 3 AMP, AMP PART NUMBER AND DATE CODE MARKED IN AREA INDICATED, ON SAME SIDE AS POSITION NUMBER 2 INDICATOR.
- 4 ONE GROUND BUS WITH 4 TAILS PER EACH 20 PIN CONTACTS.
- 5 FIRST TAIL FROM RIGHT OF EACH GROUND BUS IS KINKED.

	62.23[2.450]	49	64.72[2.548]	67.31[2.650]	68.94[2.714]	100	5149010-4		
OBSELETE	24.13[.950]	19	26.62[1.048]	29.21[1.150]	30.84[1.214]	40	5149010-1		
	E	D	C	B	A	NO OF POS	PART NUMBER		
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN L VARELA 01-19-05	 TE Connectivity				
				CHK D DIXON 01-19-05					
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D DIXON 01-19-05	NAME PLUG ASSY WITH KINKED GROUND BUS TAILS, 18.75 TANK, 2.54 TAIL, BTB, MICROSTRIP				
		0 PLC ± -		PRODUCT SPEC					
		1 PLC ± -		108-1272					
		2 PLC ± -		APPLICATION SPEC					
		3 PLC ± 0.13[.005]		114-11005					
MATERIAL		FINISH		WEIGHT 0.000000	A1 00779 C=5149010		RESTRICTED TO		
				CUSTOMER DRAWING			SCALE 10:1 SHEET 1 OF 1 REV A		