

LOC		DIST		REVISONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
B		REV PER ECR 10-018921		13SEPT10	JR	TM	

1. PARTS COMPLY WITH AMP SOLDERABILITY SPECIFICATION 109-11-5.

△ CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES,BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.





3. DIMENSIONS IN BRACKETS ARE IN INCHES.

4. FLAMMABILITY V2 FOR THICKNESS 0.38mm, 1.5mm, qnd 3.0mm PER IEC 60695-11-10.


5. GLOW-WIRE FLAMMABILITY (GWF) 800°C FOR THICKNESS 0.38mm AND 0.75mm PER IEC 60695-2-12.

6. GLOW-WIRE FLAMMABILITY (GWF) 960°C FOR THICKNESS 1.5mm AND 3.0mm PER IEC 60695-2-12.


7. GLOW-WIRE IGNITION (GWIT) 825°C FOR THICKNESS 0.38mm, 0.75mm, 1.5mm AND 3.0mm PER IEC 60695-2-13.

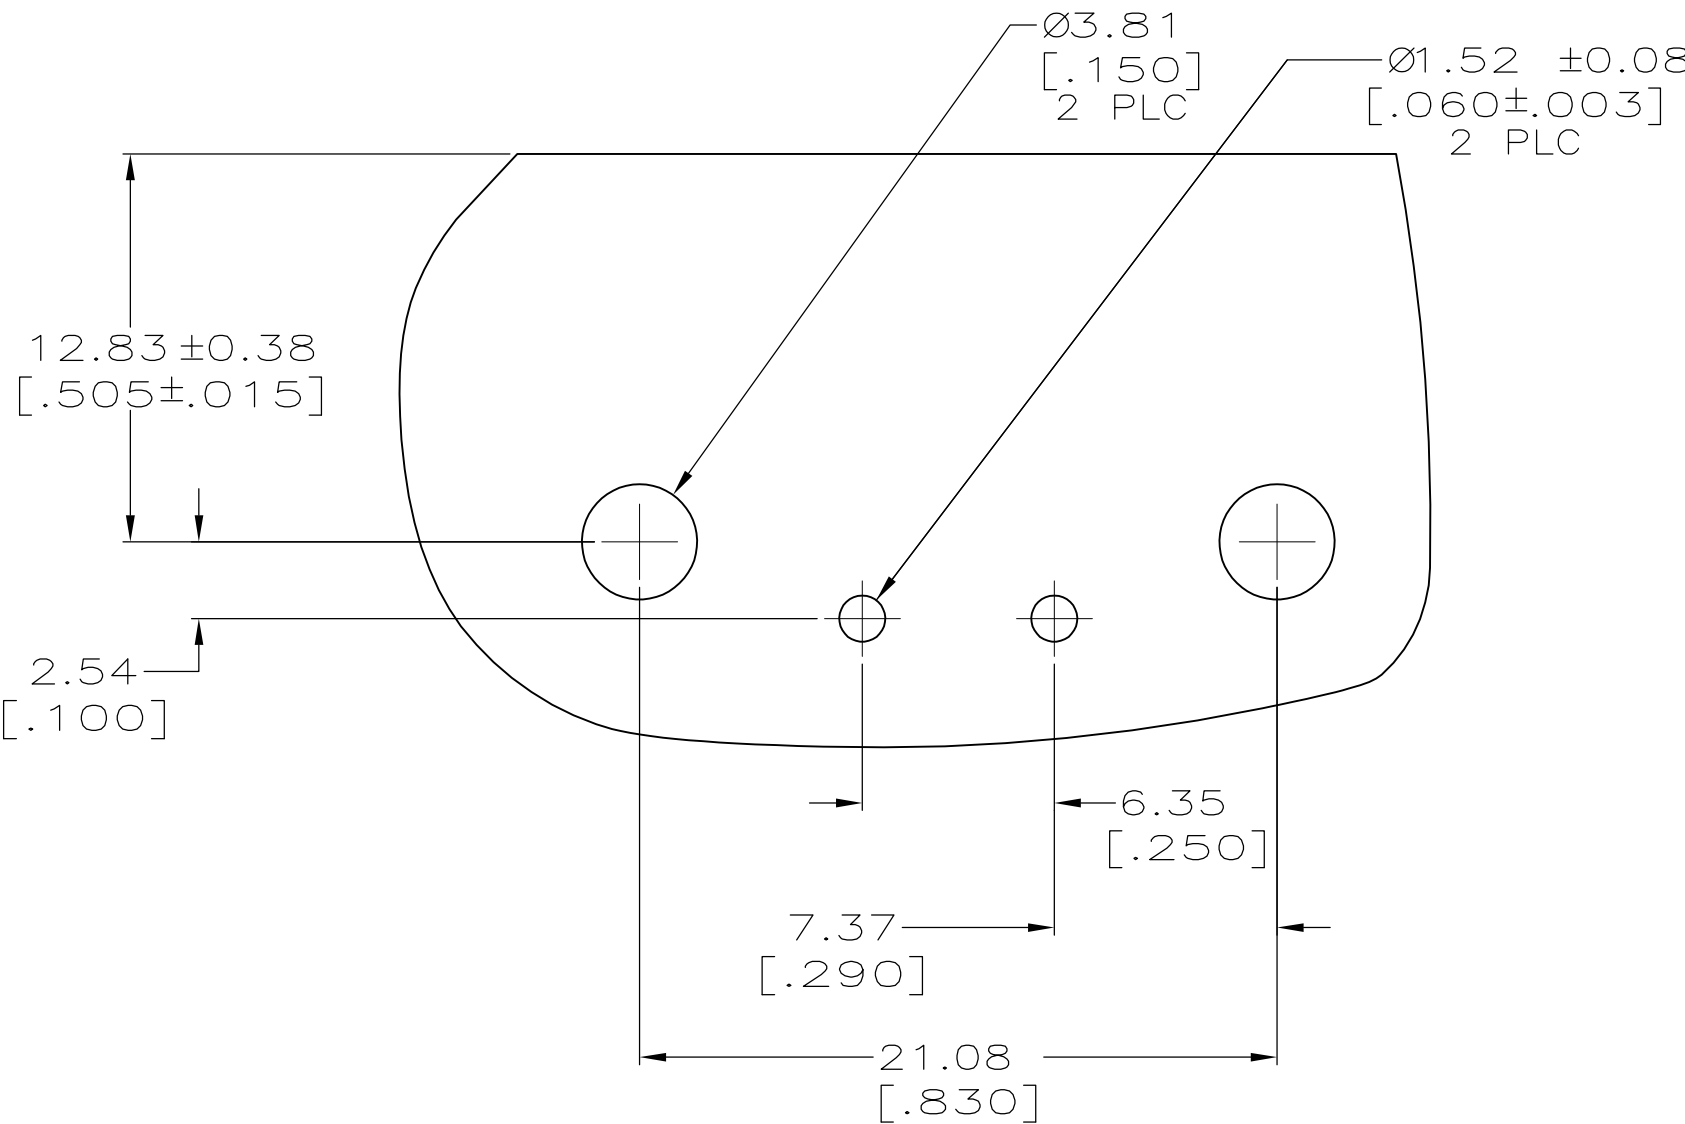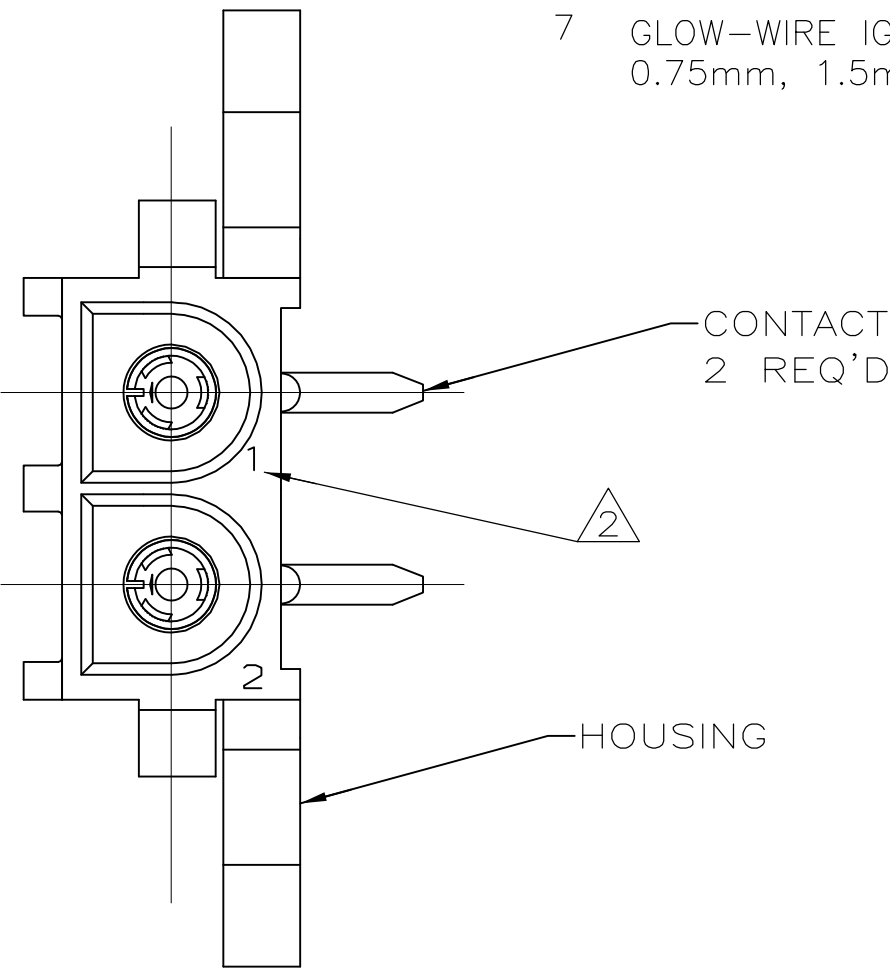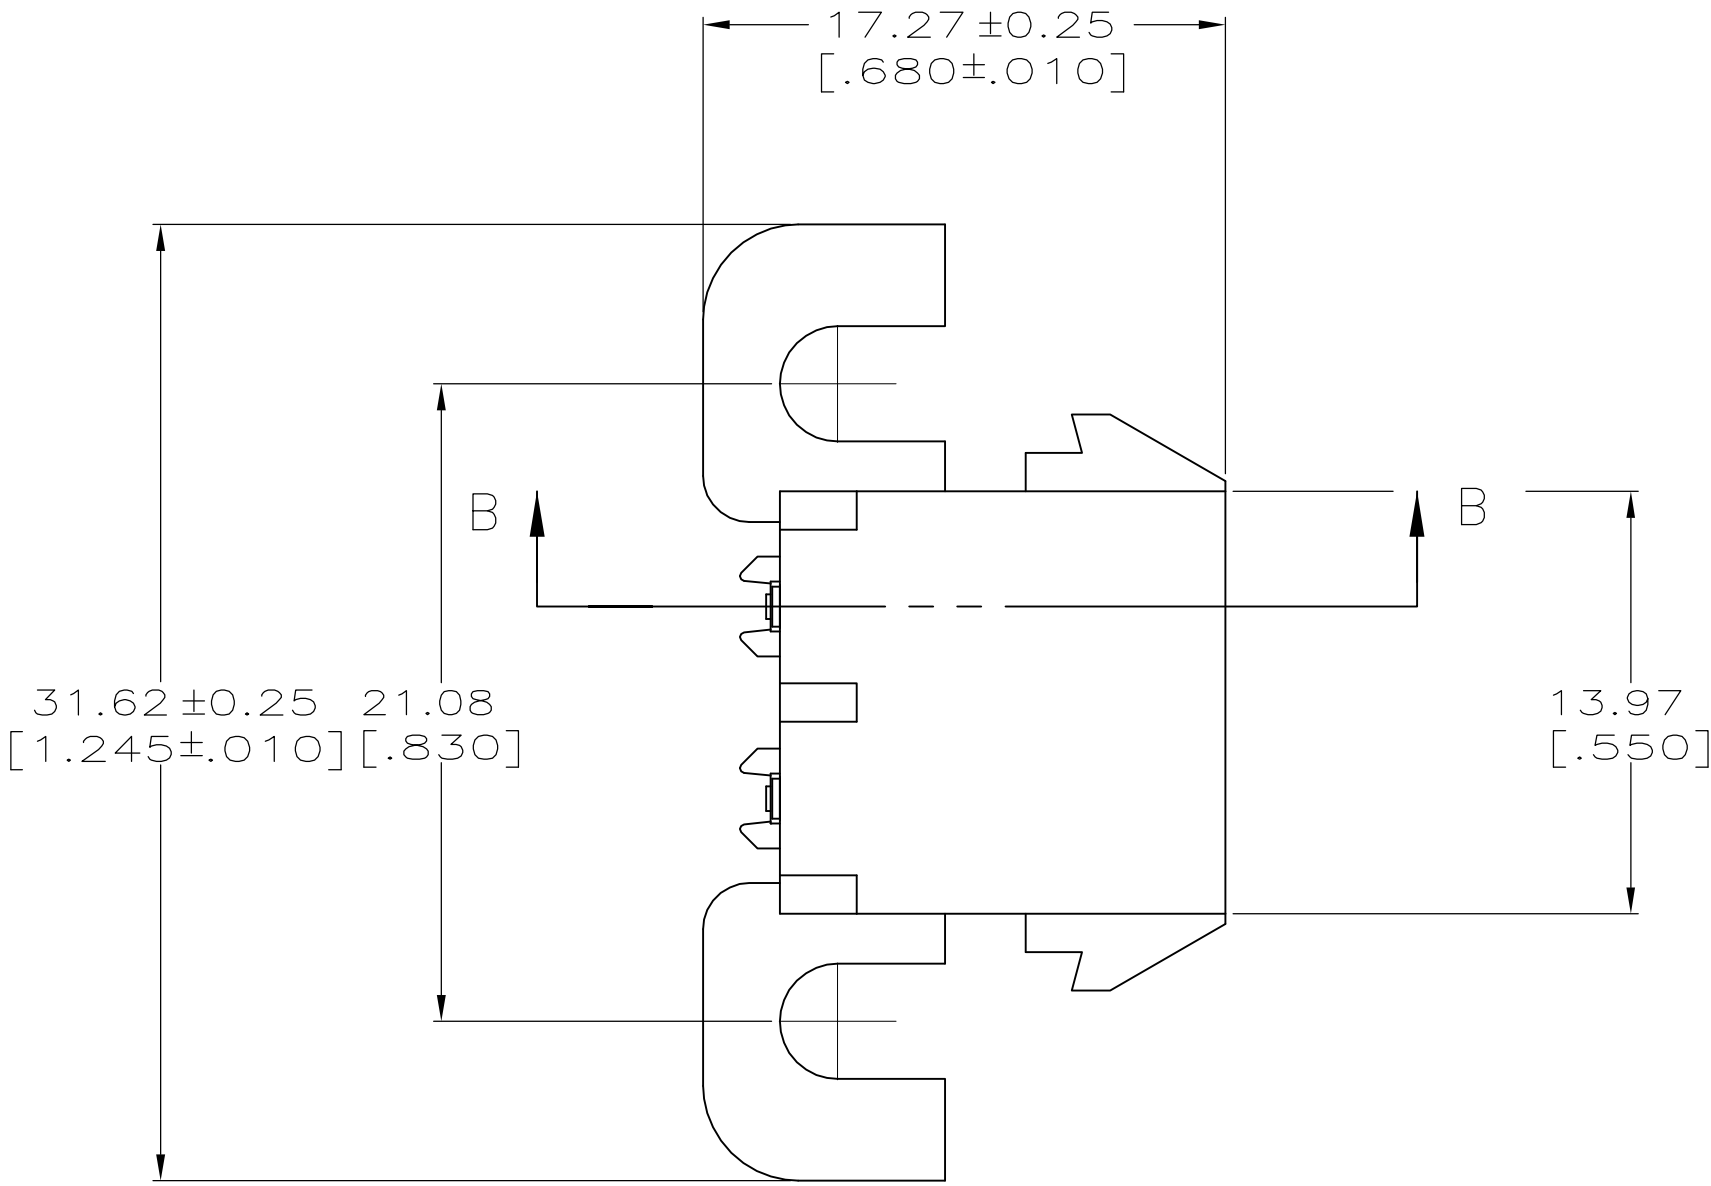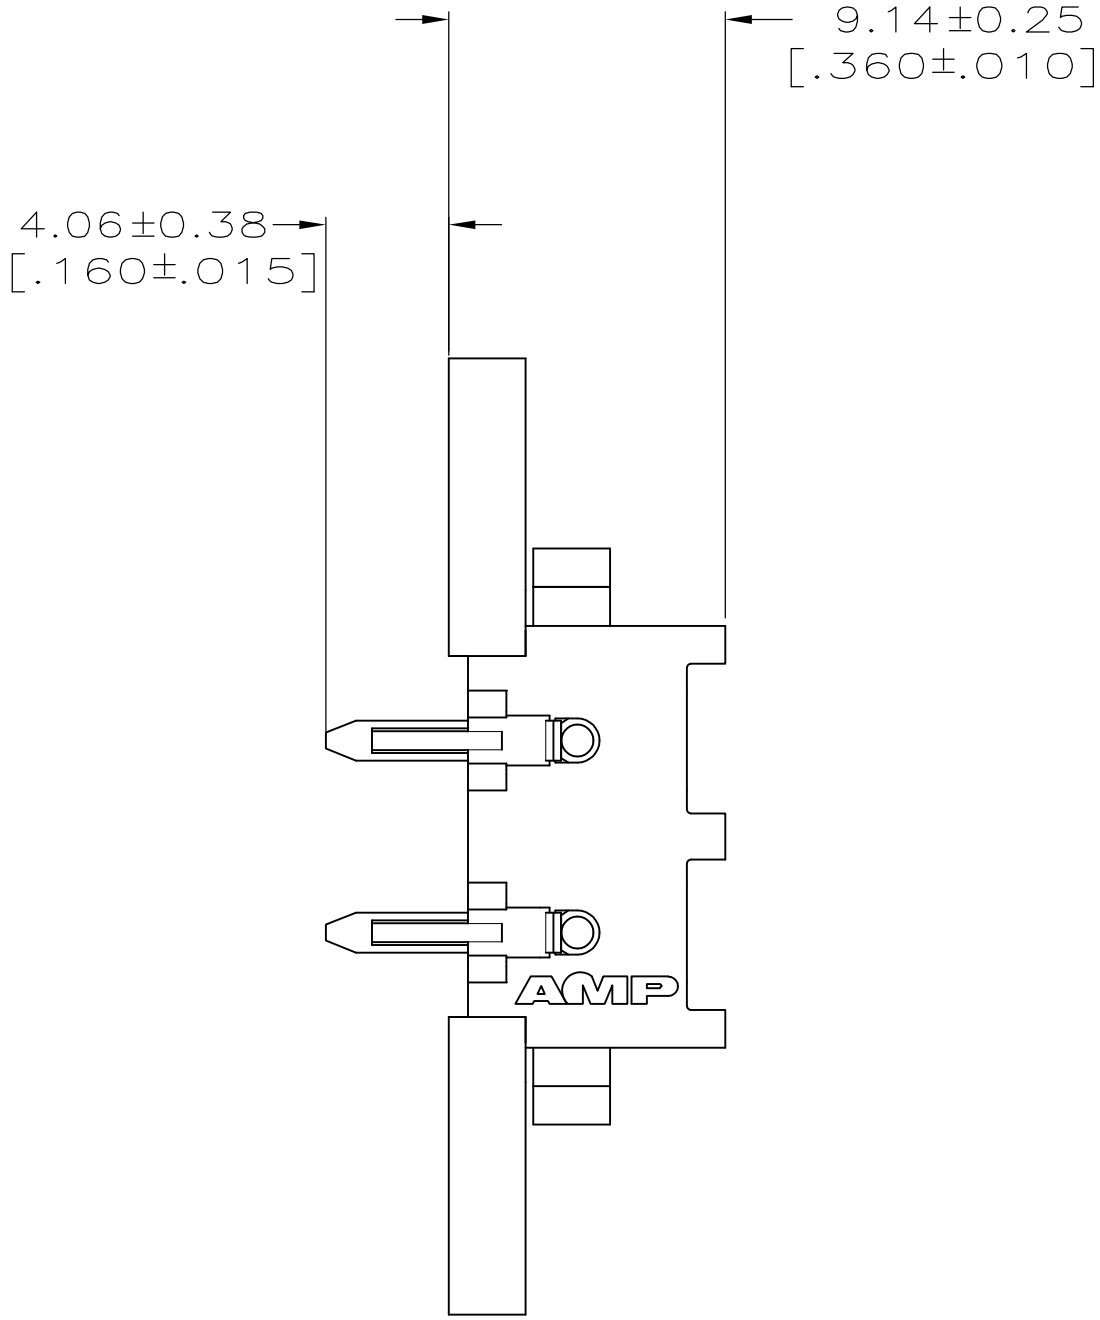


RECOMMENDED MOUNTING HOLE PATTERN FOR .062 [1.57] THICK P.C. BOARD

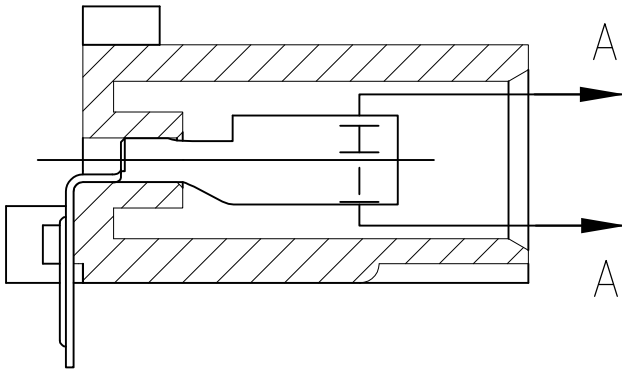

SECTION B-B

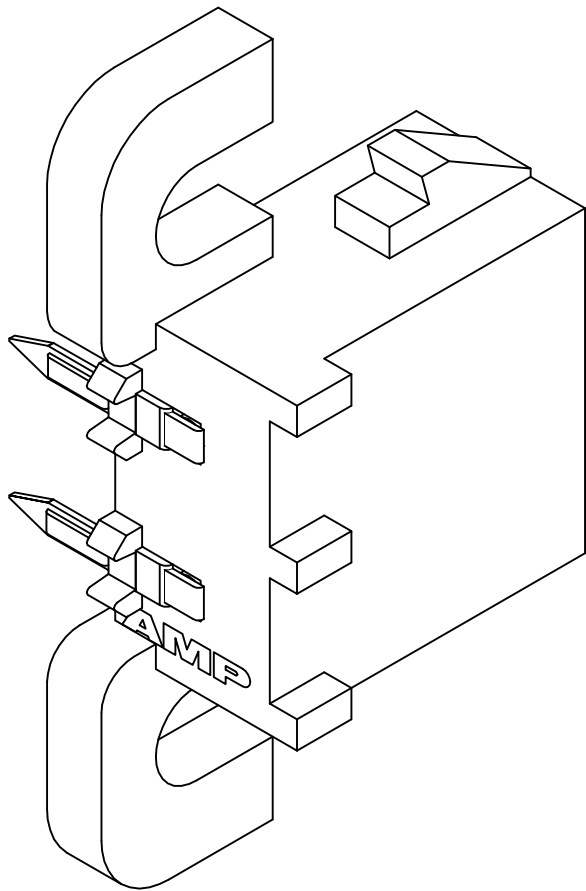

3-DIMENSIONAL MODEL NTS

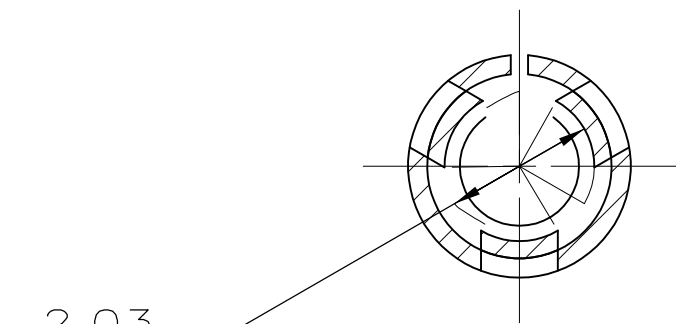

SECTION A-A
SCALE 10:1

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN K. WHITAKER 14MAR2008		 Tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]				CHK D. COLEY 14MAR2008			
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. COLEY 14MAR2008		NAME	
		1 P/LC ± —		PRODUCT SPEC		SOCKET HEADER ASSEMBLY, RIGHT ANGLE MOUNT,2 POSITION, UNIVERSAL MATE—N-LOK(TM)	
		2 P/LC ± —		APPLICATION SPEC			
		3 P/LC ± 0.13[.005]					
		4 P/LC ± —					
MATERIAL SEE TABLE		FINISH SEE TABLE		WEIGHT —		SIZE A1	
						CAGE CODE 00779	
						DRAWING NO C=1586890	
						RESTRICTED TO —	
CUSTOMER DRAWING				SCALE 4:1		SHEET 1 OF 1	
						REV B	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1586890-1](#)