

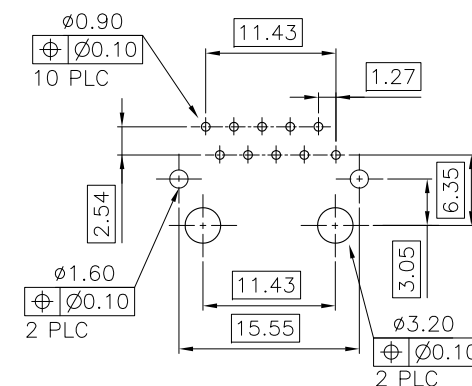


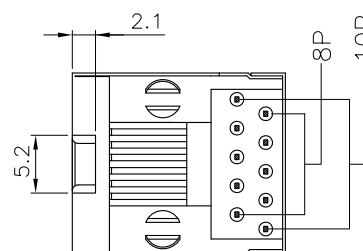

RECOMMENDED PCB LAYOUT (THICKNESS: 1.6mm)
DIMENSION TOLERANCE: 1 PLC: ± 0.1 2PLC: ± 0.05)

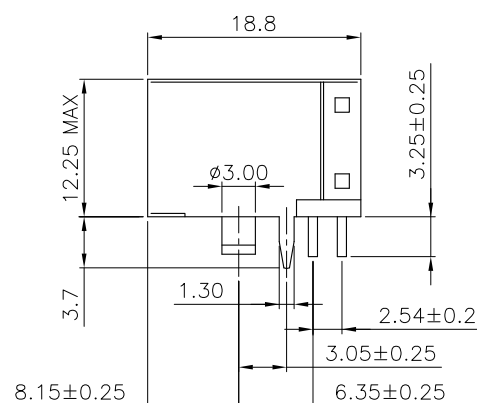

5. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	10P8C	RED	50 μ"	3-1734580-4
			30 μ"	3-1734580-3
			15 μ"	3-1734580-2
			6 μ"	3-1734580-1
OBSOLETE	10P10C	BLACK	50 μ"	1-1734580-4
			30 μ"	1-1734580-3
			15 μ"	1-1734580-2
			6 μ"	1-1734580-1
OBSOLETE	10P8C 	BLACK	50 μ"	1734580-8
			30 μ"	1734580-7
			15 μ"	1734580-6
			6 μ"	1734580-5
OBSOLETE	10P8C	BLACK	50 μ"	1734580-4
			30 μ"	1734580-3
			15 μ"	1734580-2
			6 μ"	1734580-1
	RJ 45	HSG. COLOR	MIN. GOLD THICKNESS	PART NUMBER

	SCALE —	SHEET 1 OF 2	REV B3
--	---------	--------------	--------

ANGLES	± 5
FINISH	

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-



COPYRIGHT

-



BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC
DWDIST
-

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

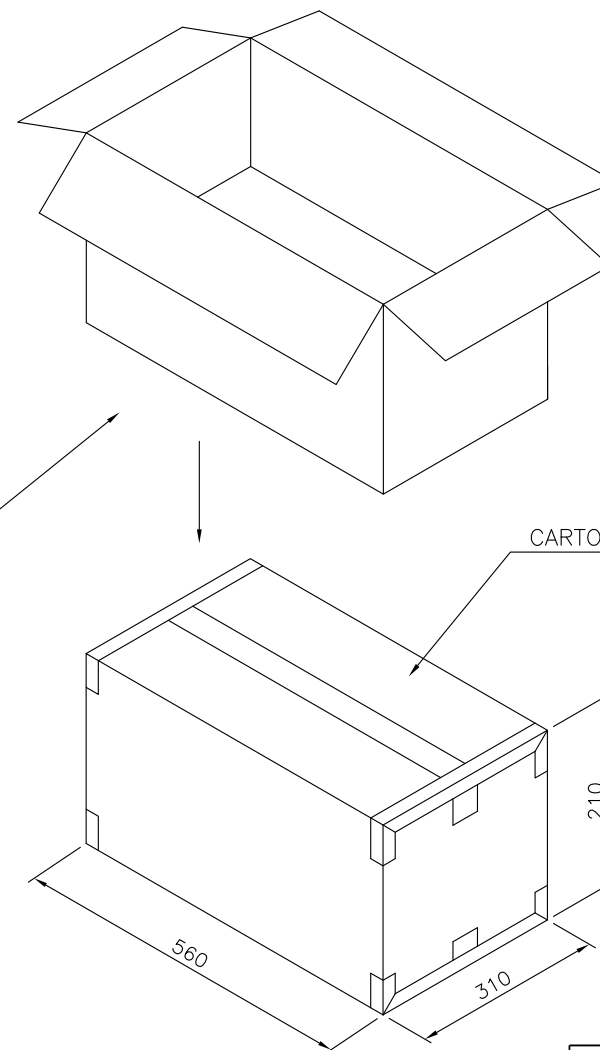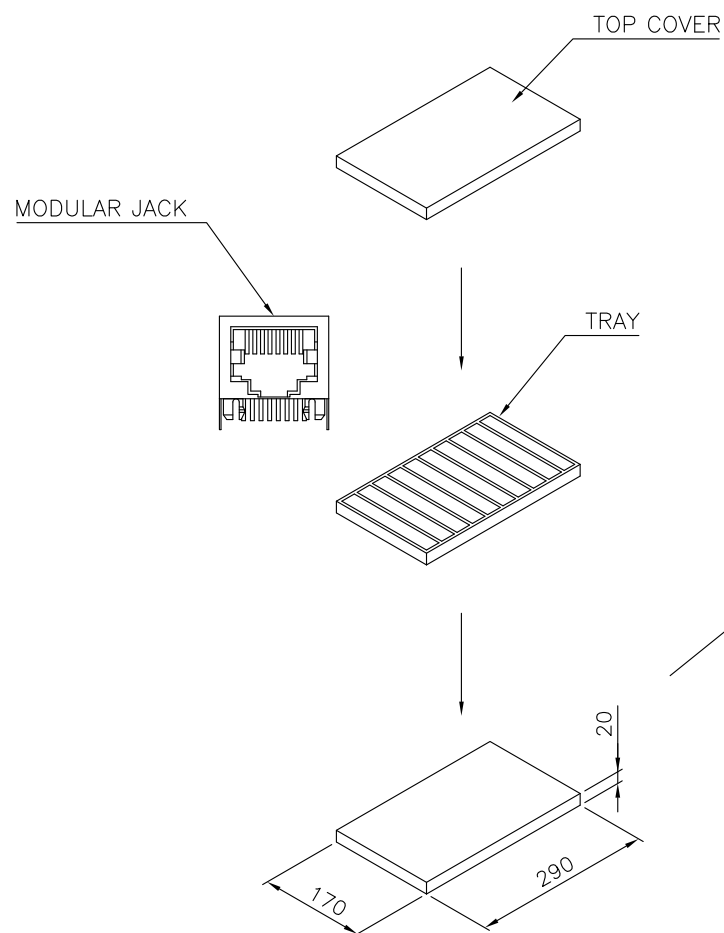

15 Kg	13.5 Kg	100	25	2500 PCS
GROSS WEIGHT	NET WEIGHT	PCS/TRAY	TRAYS /CARTON	QUANTITY

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN O. HU 01JUN2007	 TE Connectivity			
DIMENSIONS: MM		CHK S. HOU 01JUN2007				
		APVD W.J. KE 01JUN2007				
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		NAME				
MATERIAL		PRODUCT SPEC -	MODULAR JACK, RJ45, 8P8C, SHIELDED, SIDE ENTRY, LOW PROFILE			
FINISH		APPLICATION SPEC -	SIZE A3	CAGE CODE 00779	DRAWING NO C=1734580	RESTRICTED TO -
CUSTOMER DRAWING			WEIGHT -	SCALE -	SHEET 2 of 2	REV B3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1734580-3](#)