
UNCONTROLLED DOCUMENT

	IFL-LXAL406070		1
′	E A N. NITIMBED AND DEVICION COMMENTS	ח	(TE

PART NUMBER

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	E.C.N. #11148.	4.16.07

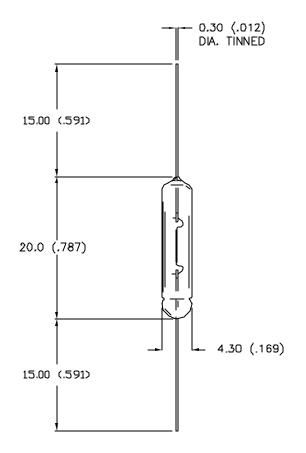

ELECTRO-OPTICAL CHARACTERISTICS

OPERATING VOLTAGE : 6V

FORWARD CURRENT : 70mA±10%

INTENSITY : .12 M.S.C.P. ±25%

AVERAGE LIFE : 10,000 HRS

BASE TYPE : AXIAL LEADS

LEAD FINISH : TINNED

(Pb)

REV.

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN=+DECINAL PRECISION MAX.= +0.00 (±0.000). MIN=+D

PART NUMBER

A IFL—LXAL406070

6V, 70mA, AXIAL LAMP.

Confidential information

The information contained in this document is the property of lumex inc. Except as specifically authorized in writing by lumex inc., the holder of this document shall keep all information contained herein confidential and shall profect same in whole or in part from disclusure and dissemnation to all third parties.

RELABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT

SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FALLIRE.

PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY: CHECK

CHECKED BY: APPROVED BY:

PROVED BY: DATE: 5.8.97 PAGE: 1 OF 1 SCALE: N/A

JC

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

IFL-LXAL406070