
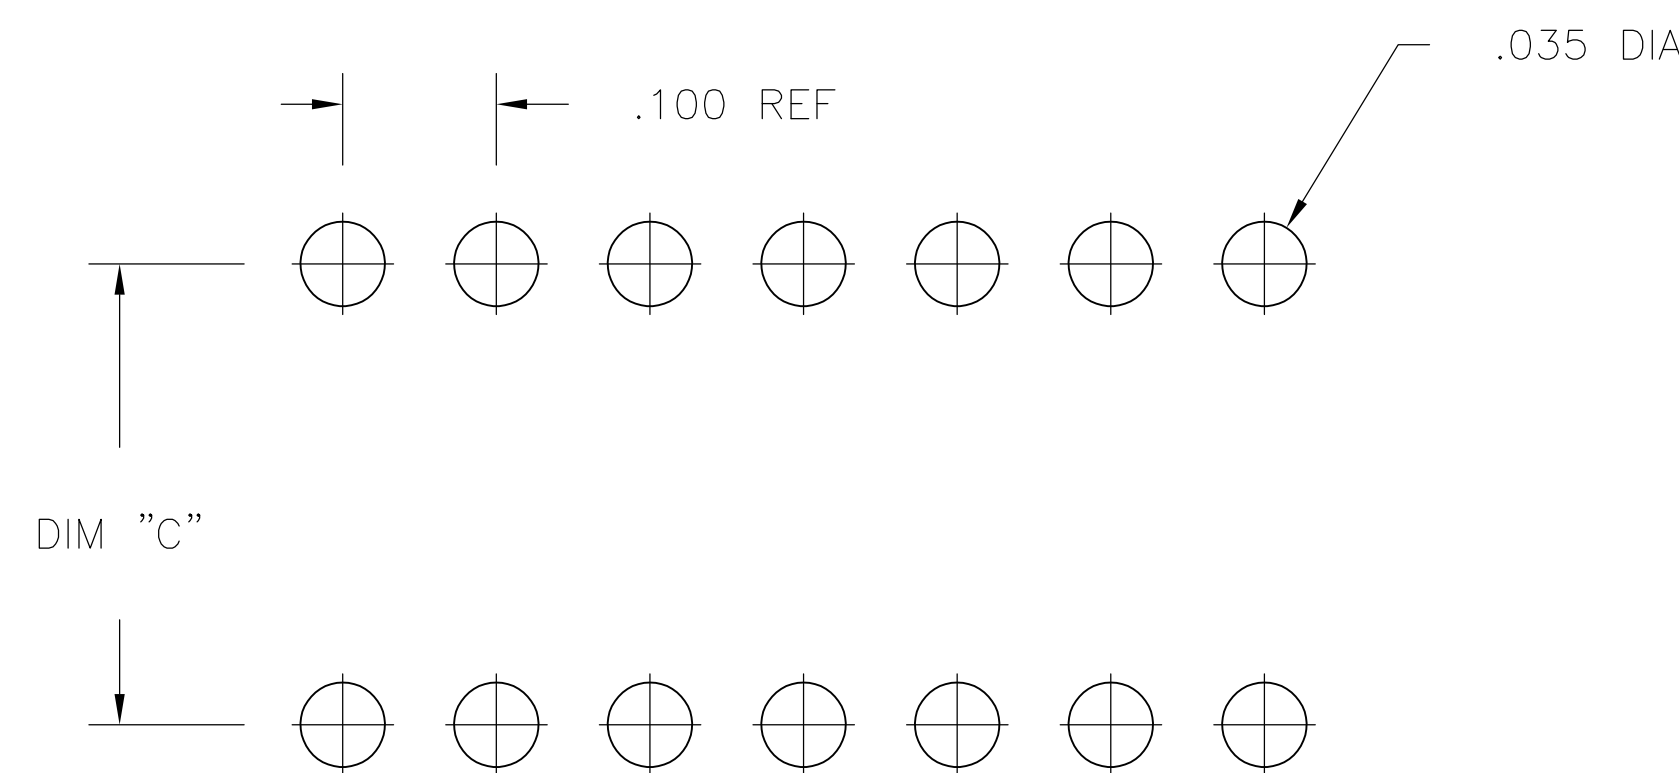
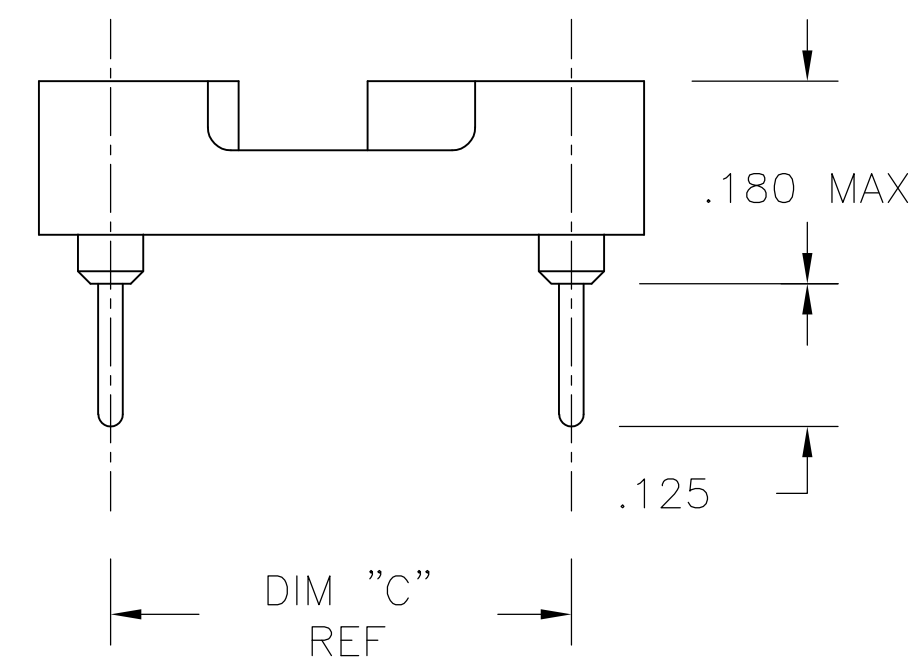
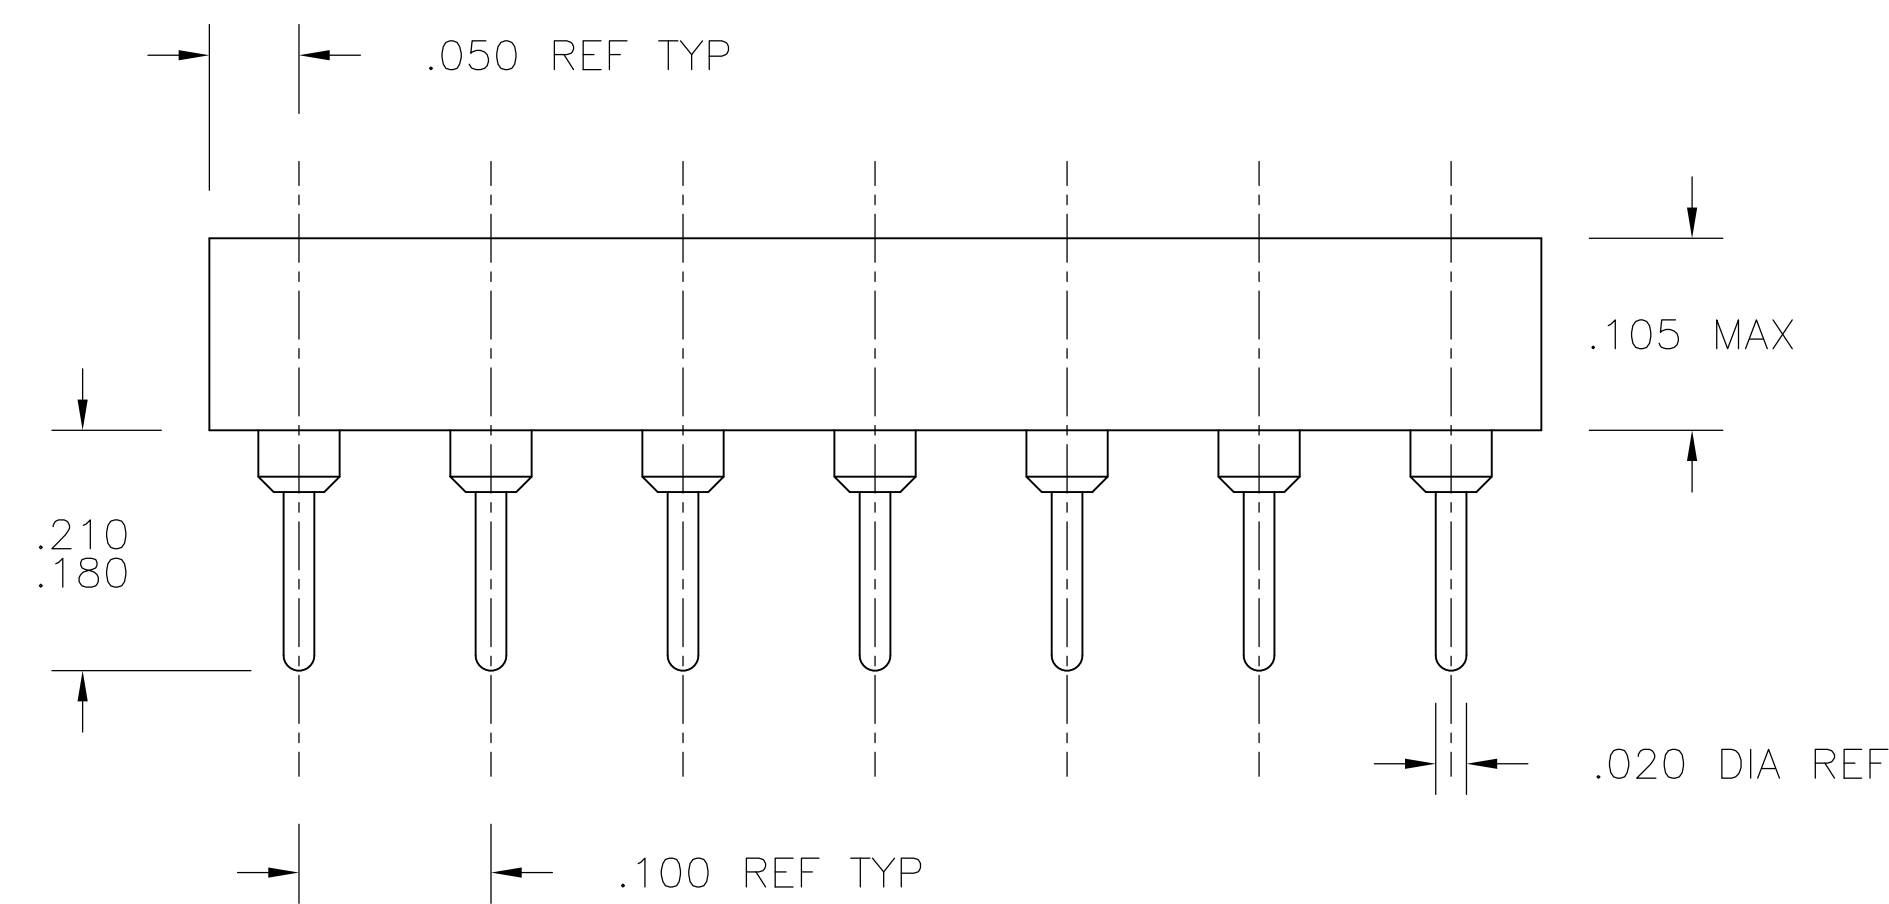
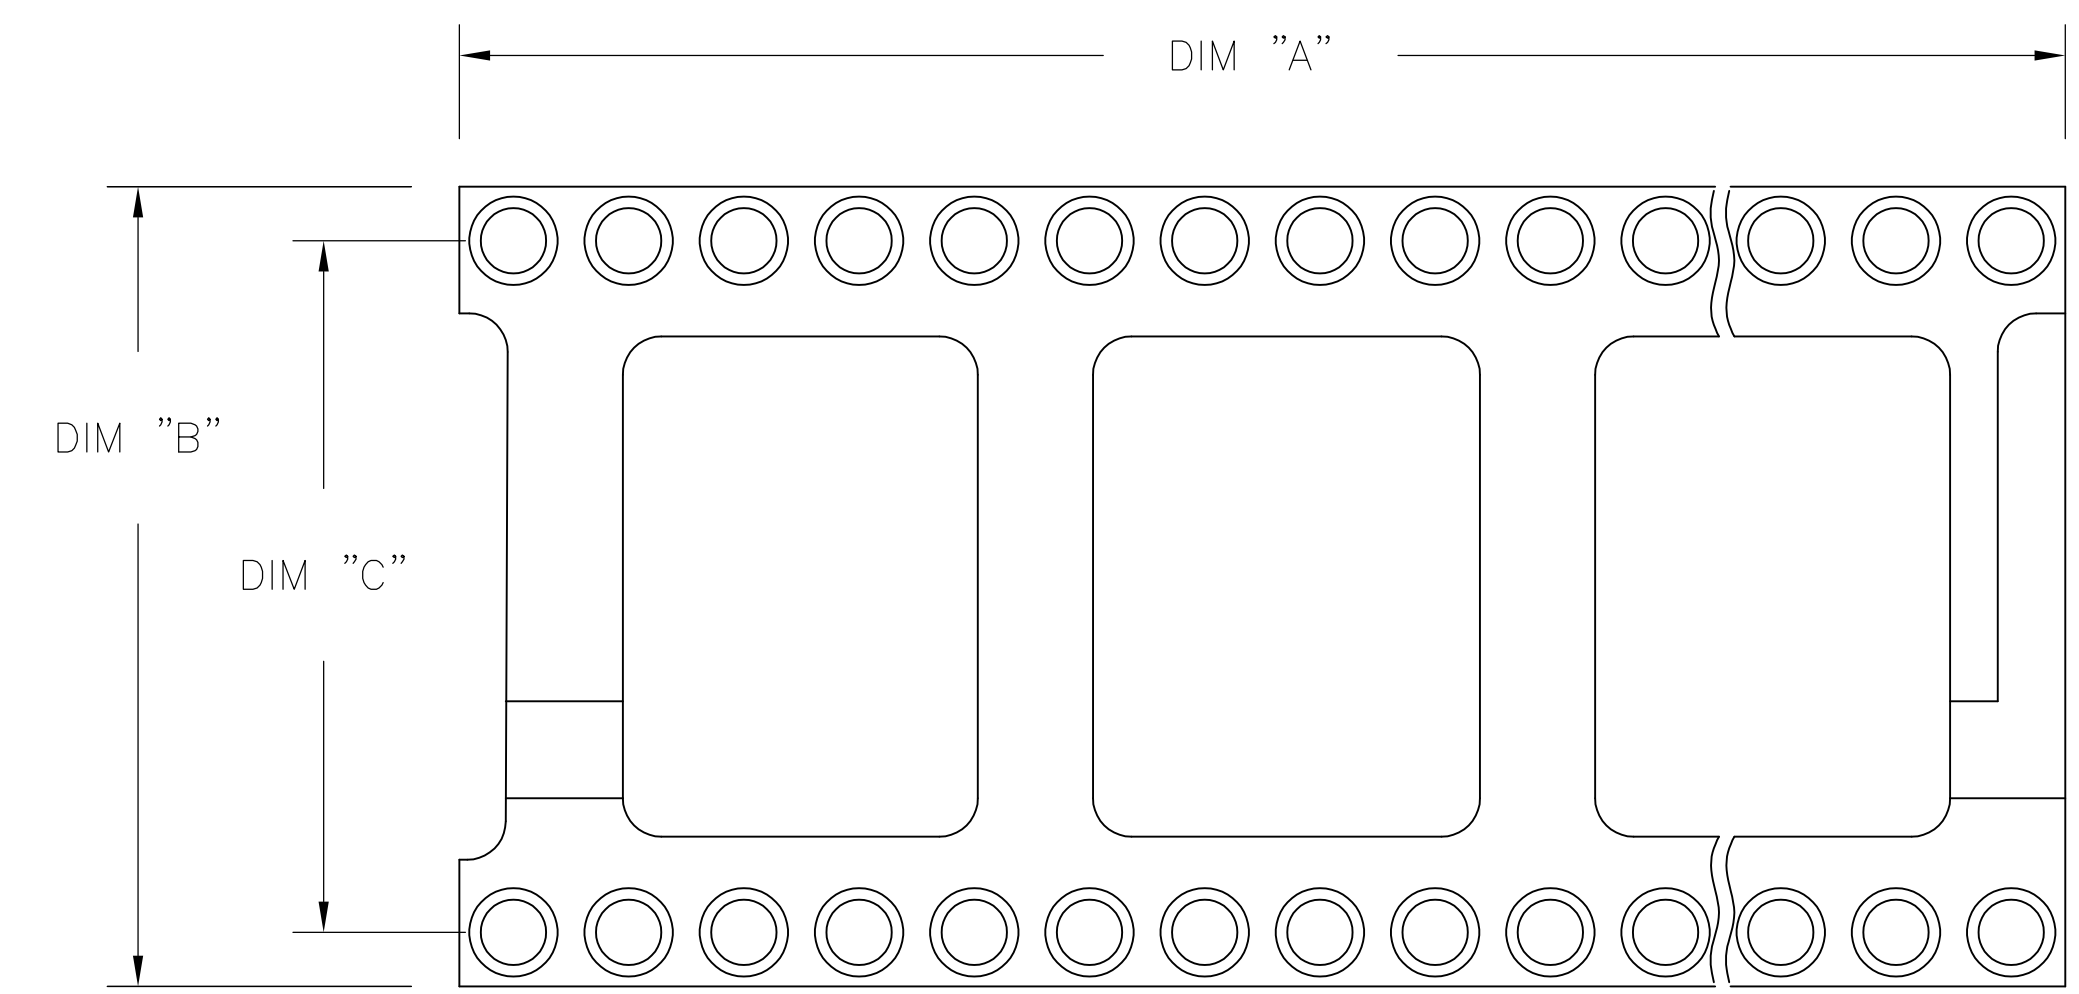
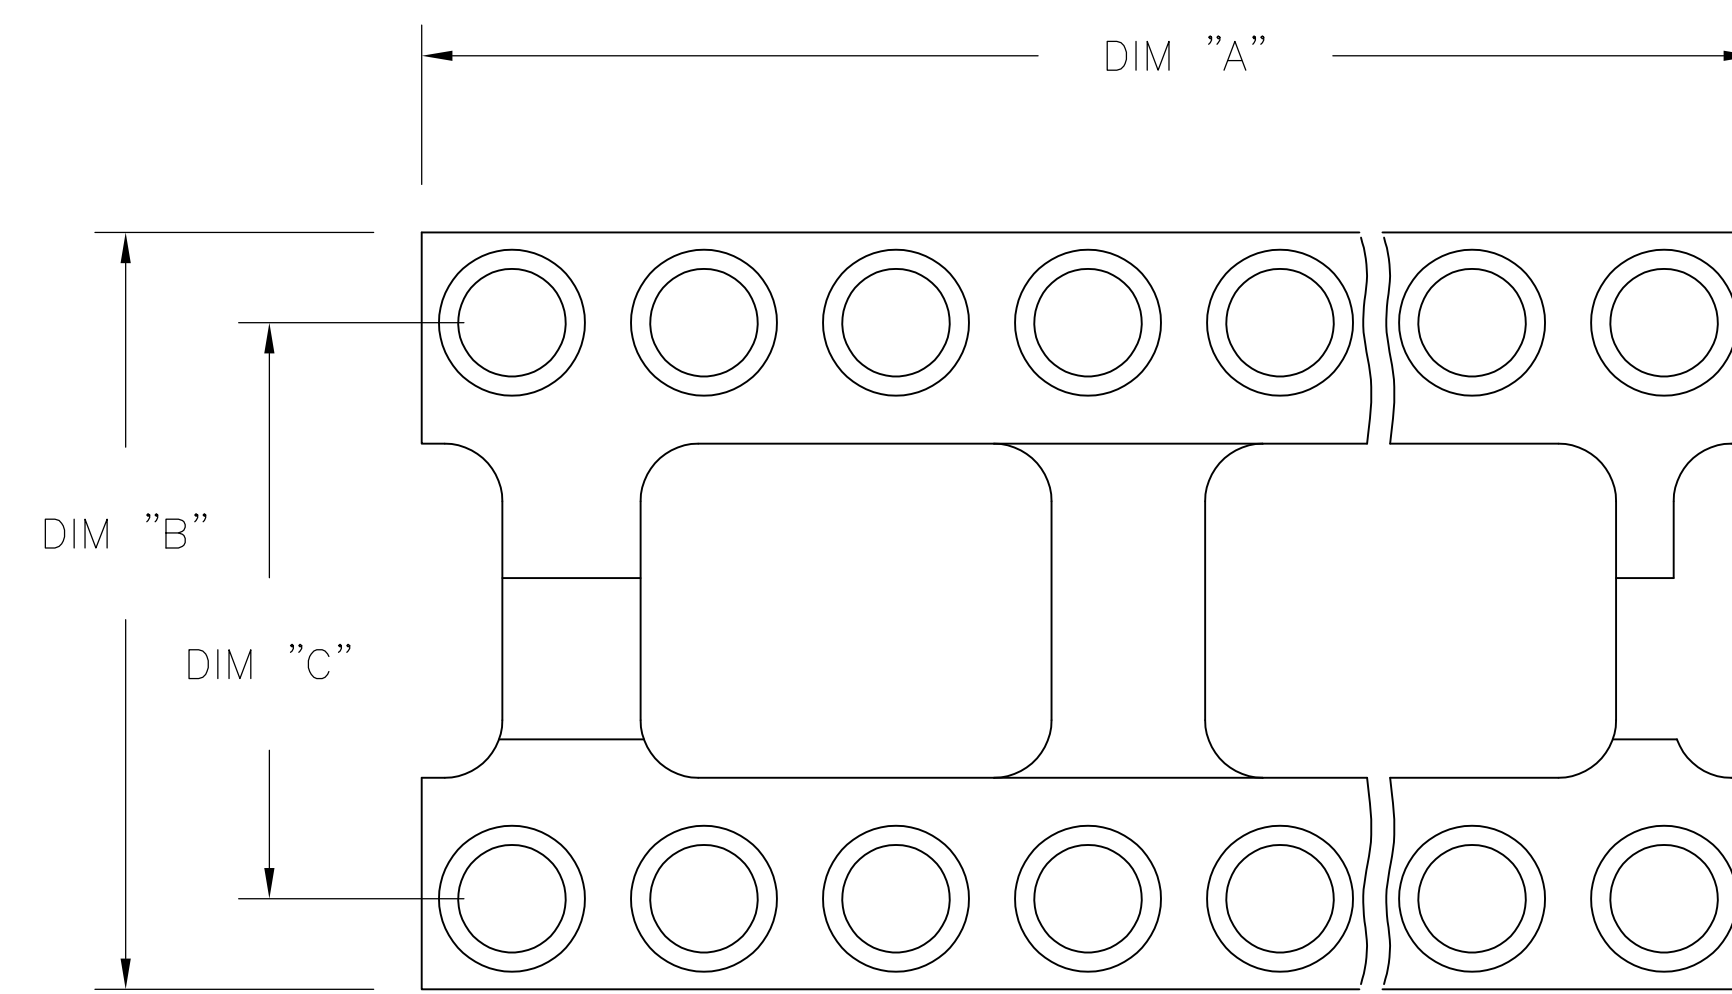


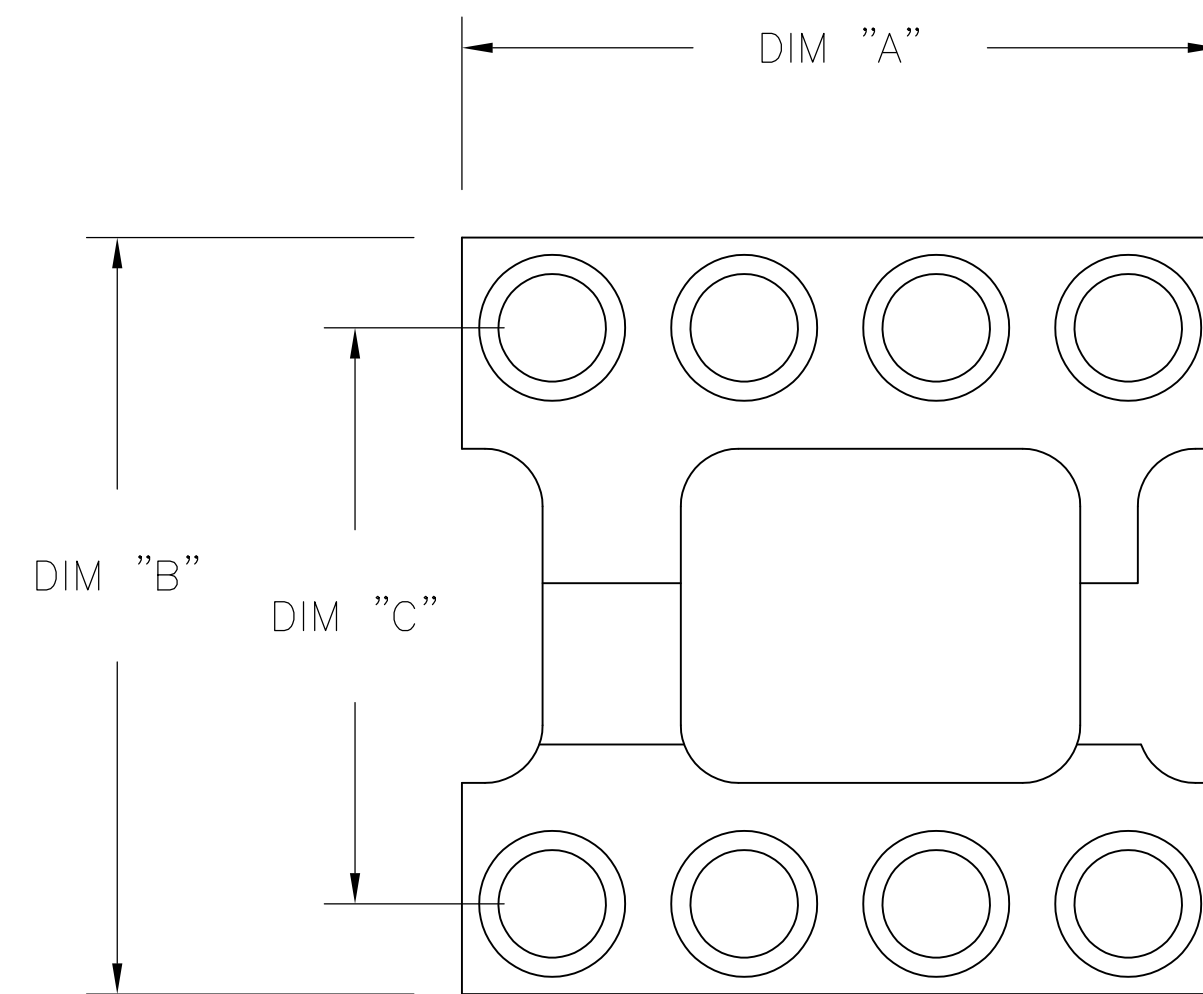

P.C.B. HOLE LAYOUT

TOLERANCE $\pm .003$

1. INSULATOR MATERIAL - THERMOPLASTIC POLYESTER, PCT, BLACK, UL94 V-O
2. MACHINED CONTACT - BECU, PLATED WITH 80-200 μ ".
TIN (LEAD FREE) OVER 75-100 μ " COPPER.
3. SLEEVE - COPPER, PLATED WITH 180-340 μ "
THK TIN (LEAD FREE) OVER 75-125 MIN NICKEL.
4. MACHINED CONTACT - BECU, PLATED WITH 25 μ " MIN.
GOLD OVER 30-100 μ " NICKEL.
5. ELECTRICAL:
CONTACT RESISTANCE: 10 MILLIOHMS MAX
CONTACT RATING: 3 AMPS
CAPACITANCE: 1.0 pF PER MIL-STD-202, METHOD 305
INSULATION RESISTANCE: 5000 OHMS MIN @ 500 VDC PER
MIL-STD-1344, METHOD 3003.1
DIELECTRIC WITHSTANDING VOLTAGE: 1000 VOLTS (RMS) PER
MIL-STD-1344, METHOD 3001.1
6. MECHANICAL:
INSERTION FORCE: 134 GRAMS AVG
WITHDRAWAL FORCE: 63 GRAMS AVG
"ACCEPTS IC PIN - .009"X.015" THROUGH .011"X.020", OR
.016" TO .021" DIAMETER, .150/.105 LONG"
7. ENVIRONMENTAL:
OPERATING TEMPERATURE: -55°C TO -105°C
8. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG T.KRAYBILL	07NOV03	 TE Connectivity				
DIMENSIONS:		CHK K.WRIGHT	—	NAME OPEN FRAME DIP, PREMIUM (MACHINE CONTACT), LEAD FREE (REF AUGAT 800 SERIES)				
INCHES		APOD K.WRIGHT	—					
		TOLERANCES UNLESS OTHERWISE SPECIFIED:			PRODUCT SPEC			
		0 PLC ± .			—			
		1 PLC ± .		—				
		2 PLC ± .		—				
		3 PLC ± .005		APPLICATION SPEC				
		4 PLC ± .		—				
		ANGLES ± .		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO
MATERIAL —	FINISH —	WEIGHT —	A1 00779 C-1571586				—	
CUSTOMER DRAWING					SCALE 4:1		SHEET 1 OF 2	REV B3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1571586-3](#)