


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION , 19 .
© COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	REVISIONS				
G	14			ZONE	LTR	DESCRIPTION	DATE	APPD
					C	REV PER 063A-0435-02	30SEP02	JR MS

DIMPLES
BRAZED SEAM

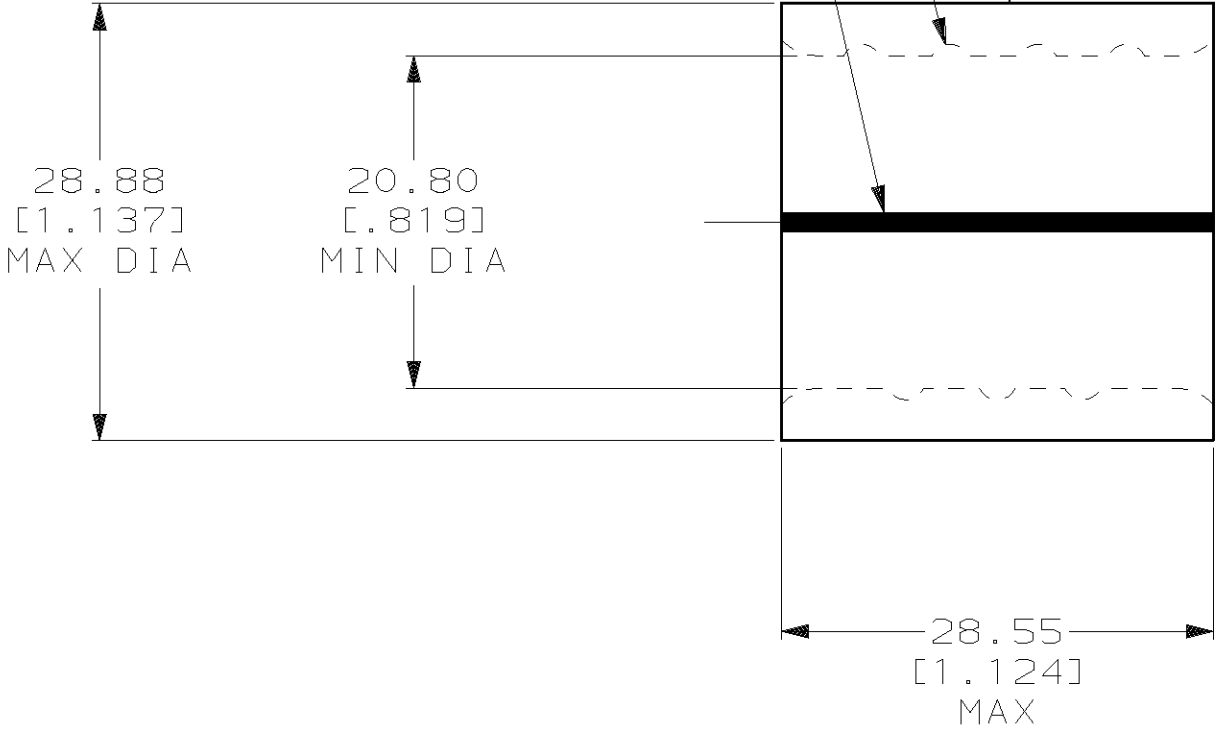

METRIC

DIMENSIONS LISTED IN mm [INCHES]

AMP WIRE RANGE	E13288 Listed
300-350 MCM SOLID OR STRANDED	300-350 MCM SOLID OR STRANDED
LR7189 Certified	MILITARY P/N AND CLASS
300-350 MCM SOLID OR STRANDED	NOT APPLICABLE

- 1 STAMP AMP W* 300-350 MCM APPROX AS SHOWN
- 2 MATERIAL THK: 3.45^{±0.10} [.136^{±.004}]
- 3 STAMP FOR MANUFACTURING LOCATION OR CODE PERMISSIBLE.

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS			MAX RECOMMENDED OPERATING TEMPERATURE: 170°C MAX					PART NO			
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS		PRODUCT INFORMATION CENTER 1-800-522-6752		VOLTAGE RATING: NOT APPLICABLE		DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± 0.20[.008] 3 PLC DEC ± - ANGLES ± -		DR 5/6/93 DK SCHRUM		 AMP Incorporated Harrisburg, PA 17105-3608	
FOR APPLICATION TOOLING INFORMATION		TOOLING ASSISTANCE CENTER 1-800-722-1111		CIRCULAR MIL AREA: 152.0-192.5mm ² [300-380] MCM SOLID OR STRANDED		MATERIAL COPPER PER ASTM B-152 ANNEALED		CHK 5/14/93 AJ KAUFMAN			
FOR ORDER ENTRY		1-800-526-5142		THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		FINISH TIN PLATE 0.00254[.000100] MIN THK PER MIL-T-10727		APPD 5/14/93 RE ROSER		NAME SPLICE, PARALLEL, SOLISTRAND, WIRE SIZE: 300-350 MCM	
								APPD 5/14/93 CR RHODAS			
								PRODUCT SPEC -		SIZE 	
								APPLICATION SPEC -		CAGE CODE 00779	
								WEIGHT -		DRAWING NO C-322276	
										SCALE 2:1	
										SHEET 1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[322276](#)