
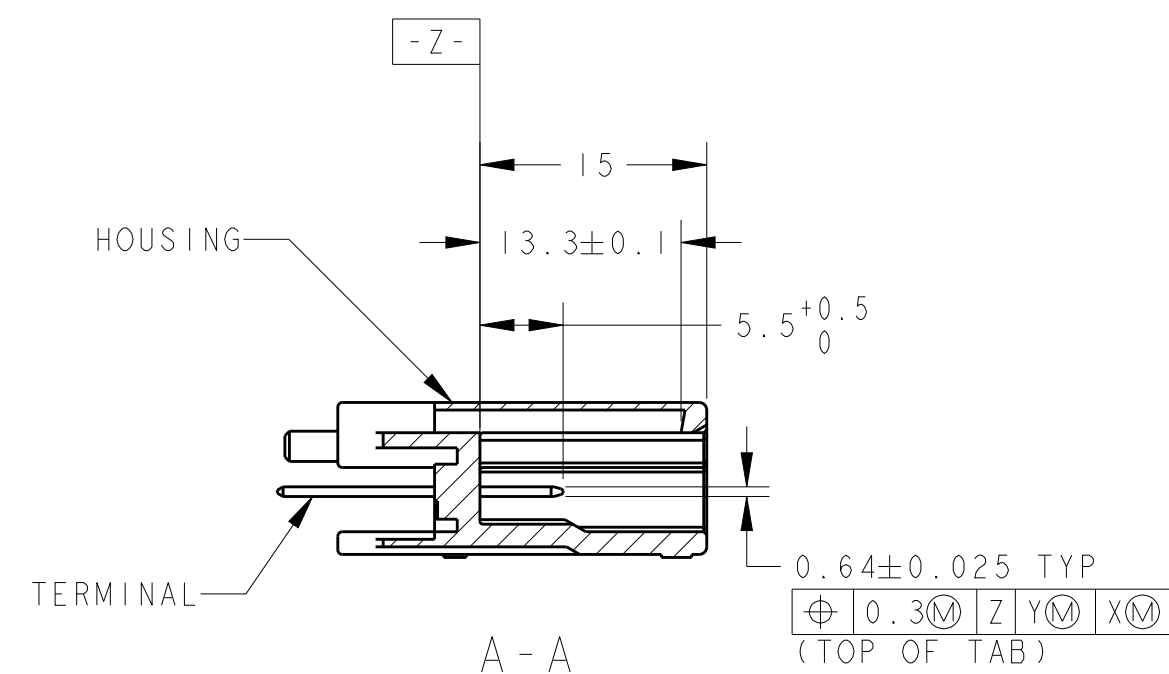
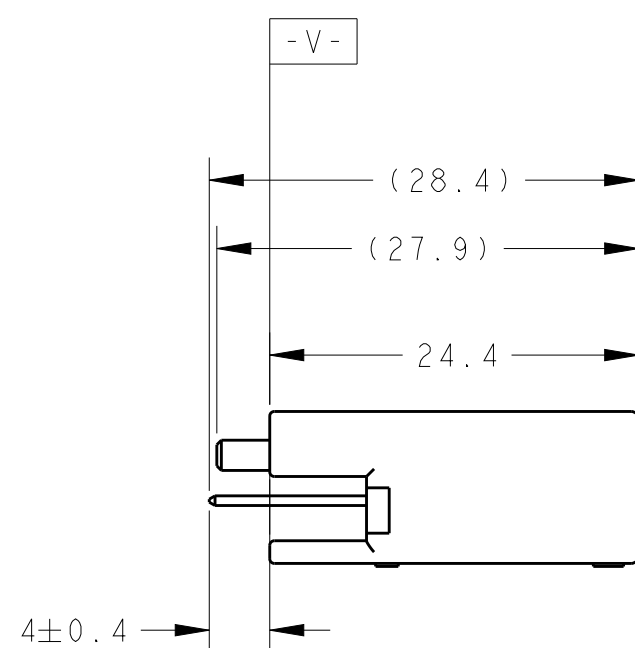
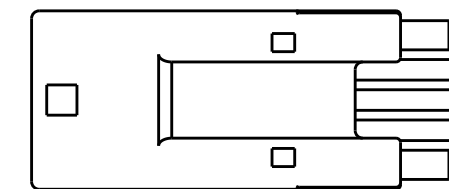


1. 嵌合相手ハウジングは、TABLE-1参照。
プラグハウジングと支障なく嵌合すること。
2. 基板への取付は、熱溶着によること。
管理値は、別途規定すること。
3. 取扱説明書NO.411-5933

POS. 極数	PLUG HOUSING P/N プラグハウジング型番
4	1318620-2

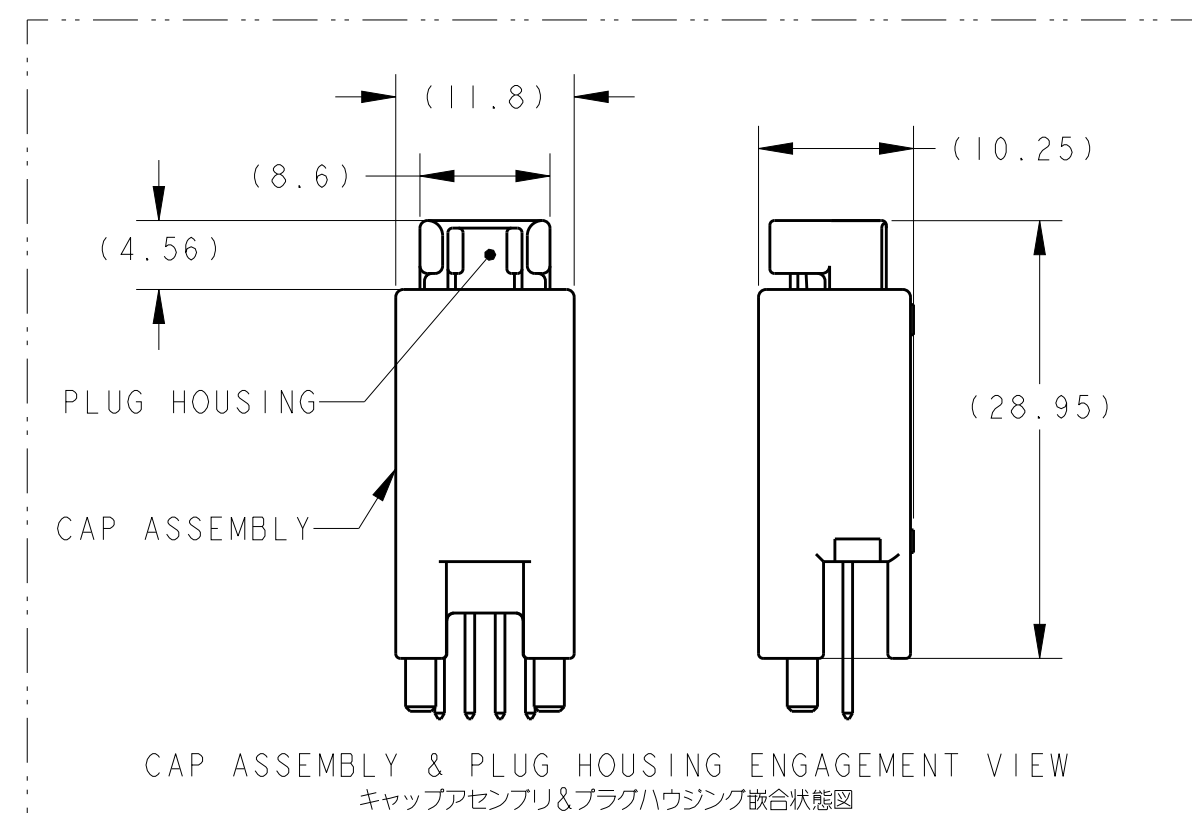

PAPER BOX タ''ンホ''ール箱	PAPER BOX タ''ンホ''ール箱	OUTER 外装	PACKING STYLE 梱包形態	
PLASTIC TUBE プラスチックチューブ	PLASTIC TUBE プラスチックチューブ	INNER 内装		
4	-	025 TAB CONT	SELECTIVE-TIN (BRT/MATTE)	3
-	4	025 TAB CONT	PRE-TINED	2
I	I	4P CAP HSG	BLACK	I
I6I2446-I	I3765I5-I	NAME	FINISH/COLOR	NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN N. YASUDA	28AUG00	 TE Connectivity					
		CHK N. SAI	28AUG00						
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差: ±0.3		NAME 025 4POSITION CAP HOUSING ASSEMBLY (V-TYPE) -					
		APVD N. SAI	28AUG00						
		PRODUCT SPEC 108-5675							
		APPLICATION SPEC 114-5250							
MATERIAL PBT GF15 BRASS	SEE TABLE	WEIGHT	2.26g	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO -		
				A2	00779	C-1376515			
Customer Drawing				SCALE	2.1	SHEET	OF	REV	A
Customer Drawing									

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1376515-1](#)