
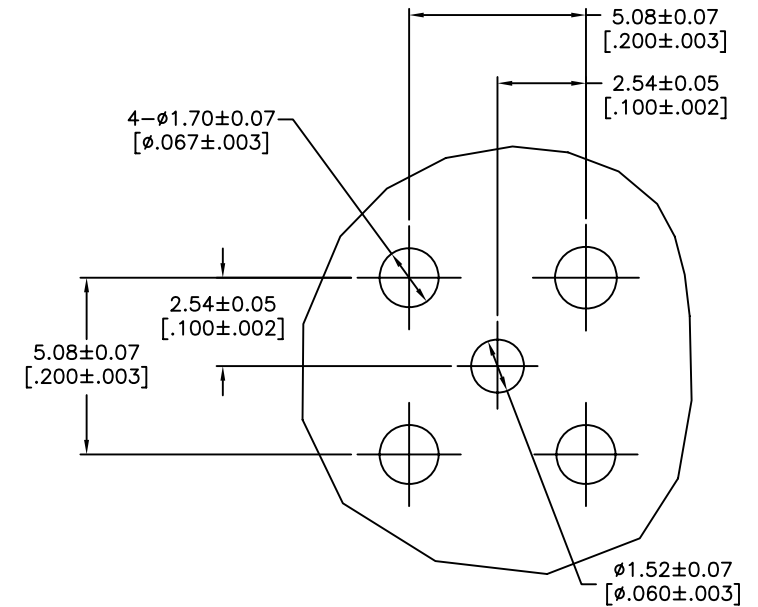


REV.	DATE	ECR NO.	DESCRIPTION
NC	11/19/10	XXXXXX	INITIAL RELEASE

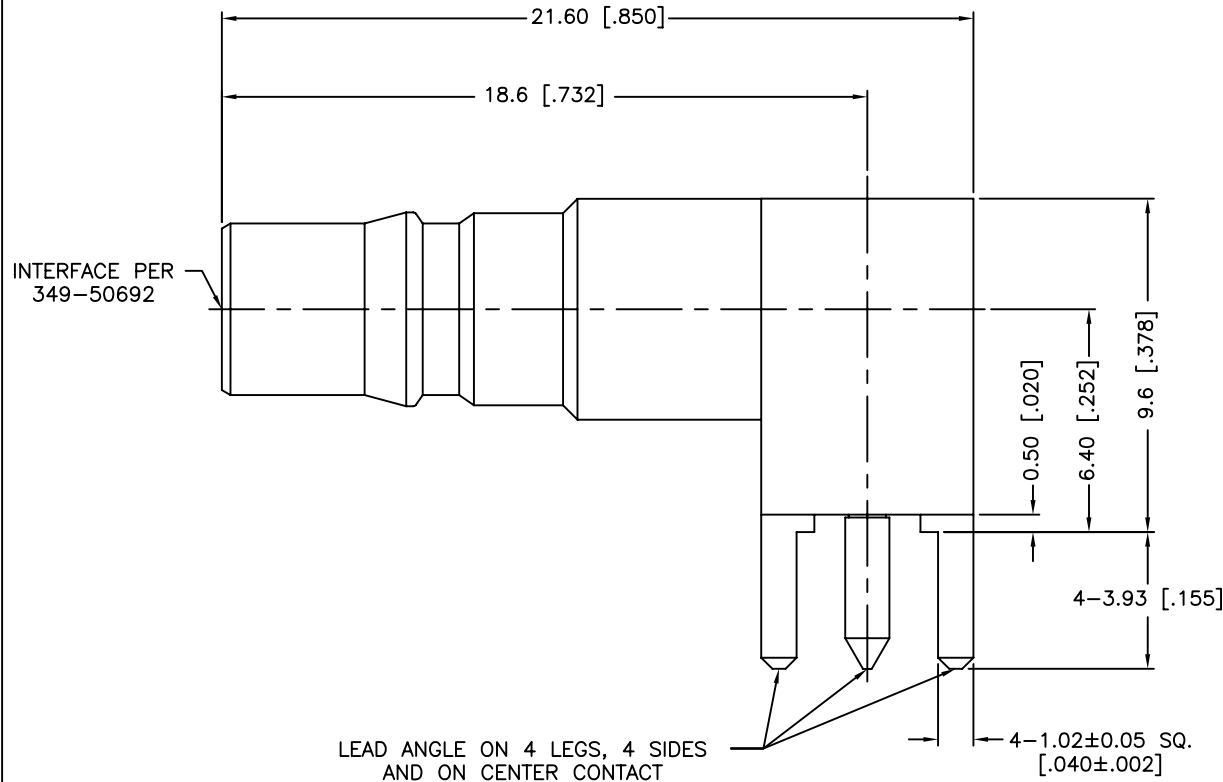

RECOMMENDED PCB HOLE PATTERN

1. DURABILITY: 100 CYCLES MIN.
2. TEMPERATURE RANGE: -40°C TO +80°C
3. FREQUENCY RANGE: DC - 6.0 GHz

5	COVER PLATE	BRASS	NEXCOTE	1
4	INSULATOR-REAR	PTFE	NATURAL	1
3	BODY	BRASS	GOLD	1
2	CONTACT PIN	BERYLLIUM COPPER	GOLD	1
1	INSULATOR	PTFE	NATURAL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex										
	DRAWN	M.ZHANG	11/19/10												
	CHECKED				PART DESCRIPTION										
	ISSUED				QMA JACK, RIGHT ANGLE, PCB MOUNT										
	SHEET	1 OF 1			PART NO.										
					134100										
	CAD FILE	C:/CONNEX/134100.DWG				DWG. NO.		134100.DWG		REV.	NC	SIZE	A	SCALE	NA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[134100](#)