

4


3

2

1

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
DW	—		B4	REVISED (ECO-14-012616), OBSOLETED 3-6.	30DEC2014	LL	SH




LED SCHEMATIC	
POSITION 2	POSITION 1
GREEN	YELLOW
9+  -10	11+  -12
FOR 1734320-X	



DETAIL B(SCEALE 2:1)

LED SCHEMATIC	
POSITION 2	POSITION 1
YELLOW	GREEN
9+  -10	11+  -12
FOR 1-1734320-X	

LED SCHEMATIC	
POSITION 2	POSITION 1
GREEN	GREEN
9+  -10	11+  -12
FOR 4-1734320-X	

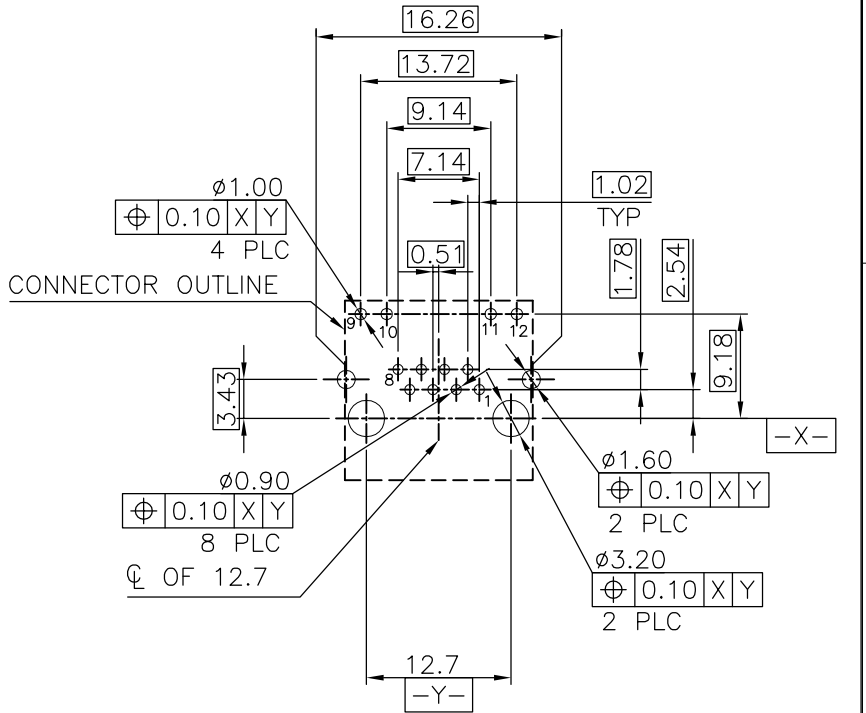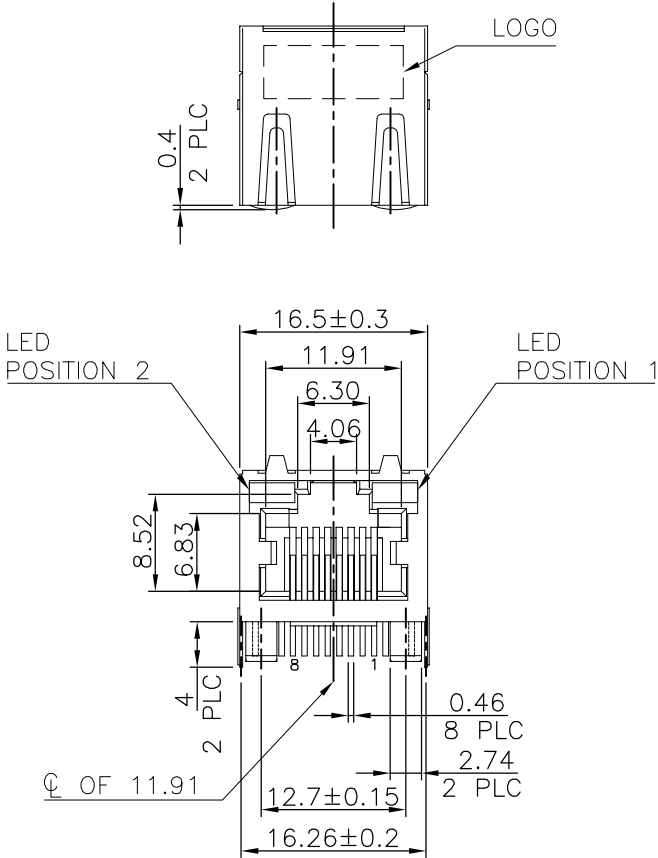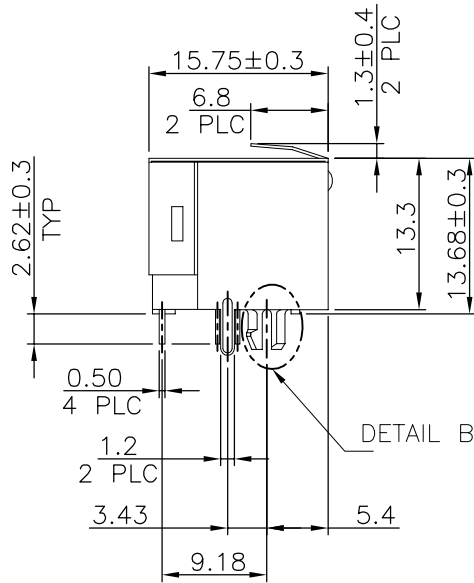


RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05 (TOP VIEW)

5 OBSOLETE	GREEN	GREEN/ YELLOW	1.27μm [50μ"]	4=1734320=4
			0.762μm [30μ"]	4=1734320=3
			0.381μm [15μ"]	4=1734320=2
0.152μm [6μ"]			4=1734320=1	
5 OBSOLETE	YELLOW	GREEN	1.27μm [50μ"]	1=1734320=4
			0.762μm [30μ"]	1=1734320=3
			0.381μm [15μ"]	1=1734320=2
			0.152μm [6μ"]	1=1734320=1
	GREEN	YELLOW	1.27μm [50μ"]	1734320=4
			0.762μm [30μ"]	1734320=3
			0.381μm [15μ"]	1734320=2
			0.152μm [6μ"]	1734320-1
	POSITION 2	POSITION 1	MIN. GOLD THICKNESS	PART NUMBER
	INDICATOR COLOR			

NOTE:

- MATERIAL:
HOUSING: PA46, WITH 30% GF.
UL 94V-0, BLACK COLOR.
CONTACTS: PHOSPHOR BRONZE.
SHELL: BRASS.
LED SOLDER TAIL: STEEL.
- FINISH:
CONTACTS: (SEE TABLE) GOLD PLATED ON CONTACT AREA,
GOLD PLATED ON SOLDER TAIL,
WITH ENTIRE CONTACT UNDERPLATED
1.27μm [50μ"] MIN. NICKEL.
SHELL: 0.508μm [20μ"] MIN. NICKEL PLATED.
LED SOLDER TAIL: 2.159μm [85μ"] MIN. TIN PLATED.
- RECOMMENDED PCB THICKNESS: 1.6mm.
- WAVE SOLDER CAPABLE TO 265°C PER TE SPEC 109-202, CONDITION B.
- OBsolete PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. HSING 09JUN2009		 TE Connectivity			
		CHK S. CHIEN 09JUN2009					
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD W. KODAMA 09JUN2009		NAME	
		0 PLC ± -		MODULAR JACK CONNECTOR RJ45, SINGLE PORT, SIDE ENTRY, DIP TYPE			
		1 PLC ± 0.3					
		2 PLC ± 0.2					
		3 PLC ± 0.15					
		4 PLC ± -					
		ANGLES ± 3°					
MATERIAL		FINISH		PRODUCT SPEC 108-57535			
SEE NOTE		SEE NOTE		APPLICATION SPEC		RESTRICTED TO	
				WEIGHT 4.95 GRAMS		SIZE	
				CUSTOMER DRAWING		CAGE CODE	
						DRAWING NO	
						REV	
						SCALE	
						SHEET	
						1 OF 6	
						B4	

4

3

2


1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT 2011 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
DW		P	LTR	DESCRIPTION	DATE	APVD
				SEE SHEET 1.		

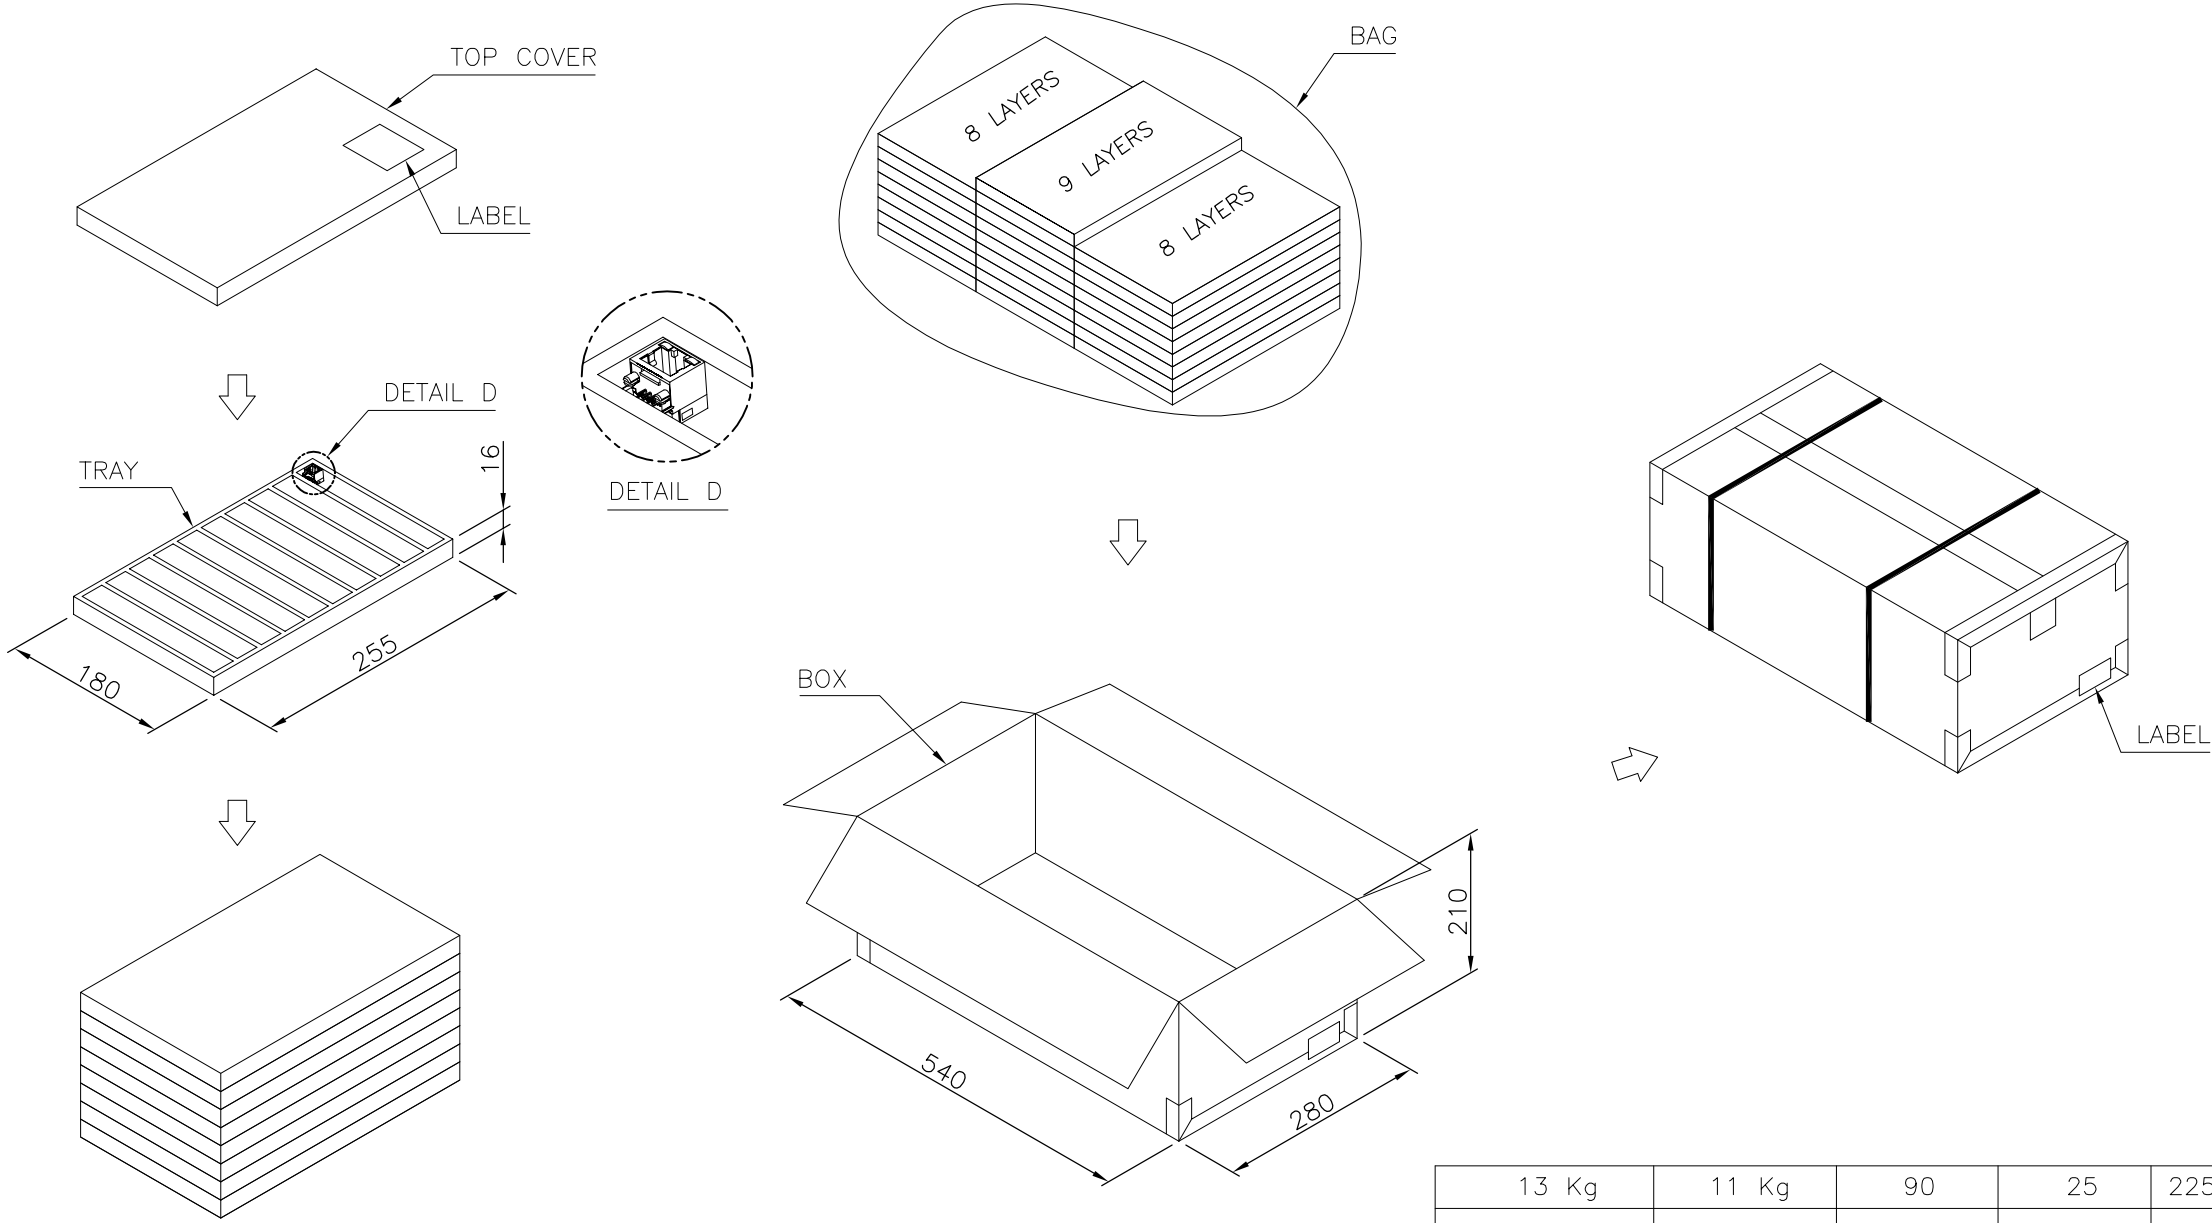

13 Kg	11 Kg	90	25	2250 PCS	3-1734320-X
14.4 Kg	12.4 Kg	100	25	2500 PCS	5-1734320-X 4-1734320-X 2-1734320-X 1-1734320-X 1734320-X
GROSS WEIGHT (Ref.)	NET WEIGHT (Ref.)	PCS/TRAY	TRAYS /BOX	QUANTITY	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±0.3
2 PLC ±0.2
3 PLC ±0.15
4 PLC ±
ANGLES ±3°
FINISH

DWN
CHK
APVD
PRODUCT SPEC
APPLICATION SPEC
WEIGHT
CUSTOMER DRAWING

TE Connectivity

NAME

MODULAR JACK CONNECTOR
RJ45, SINGLE PORT, SIDE ENTRY, DIP TYPE

SIZE
A3

CAGE CODE
00779

DRAWING NO
C=1734320

RESTRICTED TO

SCALE
—

SHEET
6 OF 6

REV
B4

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-1734320-3](#)