


D

C

B

A

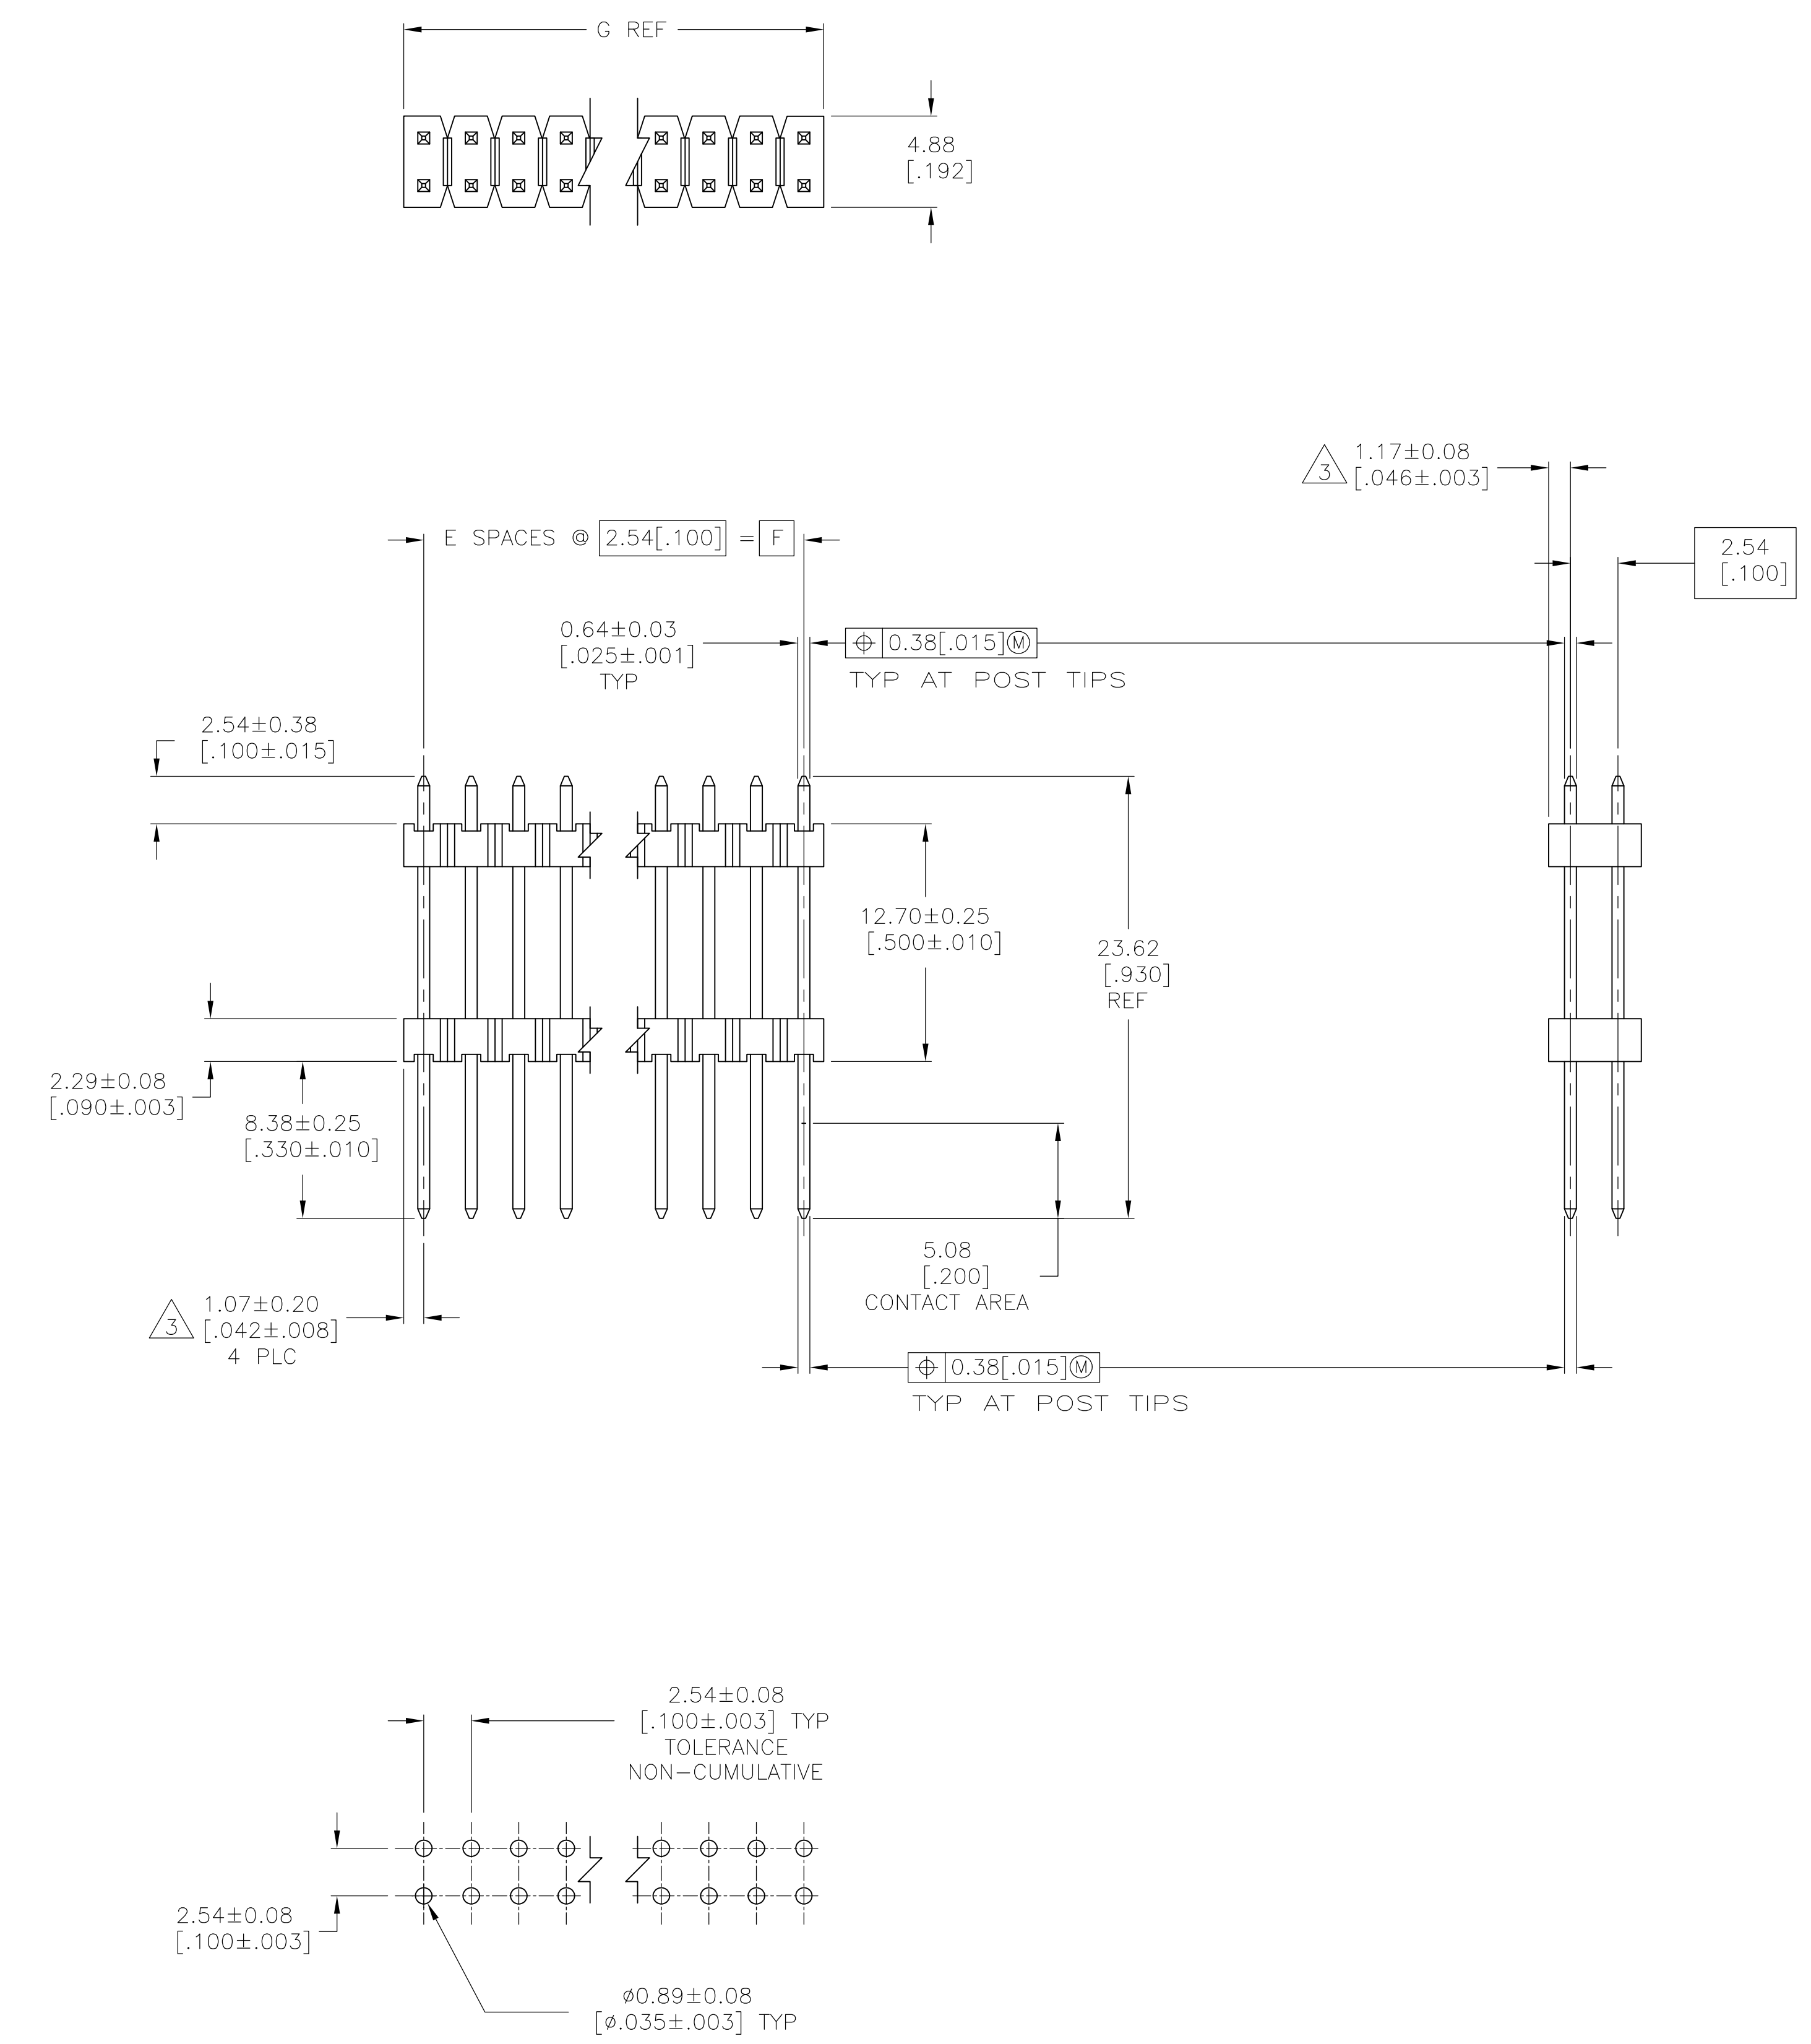

- 1
- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2
- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 4
- HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK, POST: COPPER ALLOY.
- 5
- FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA, 0.00254–0.00508 [.000100–.000200] MATTE TIN–LEAD ON SOLDER TAIL, 0.00127 [.000050] NICKEL ENTIRE POST.
- 6
- FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA, 0.00254–0.00508 [.000100–.000200] MATTE TIN ON SOLDER TAIL, 0.00127 [.000050] NICKEL ENTIRE POST.

D

C

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWNR BROWN19OCT2006

CHKJ GESFORD19OCT2006

APVBJ GESFORD19OCT2006

DIMENSIONS:
mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± 0.5[.02]
2 PLC ± 0.13[.005]
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL
4

NAME

TE Connectivity

PRODUCT SPEC

APPLICATION SPEC

SIZE
A1

CAGE CODE
00779

DRAWING NO
146494

RESTRICTED TO

—

CUSTOMER DRAWING

SCALE
4:1

SHEET
1

OF
2

REV
B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[8-146494-8](#)