




This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []



Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

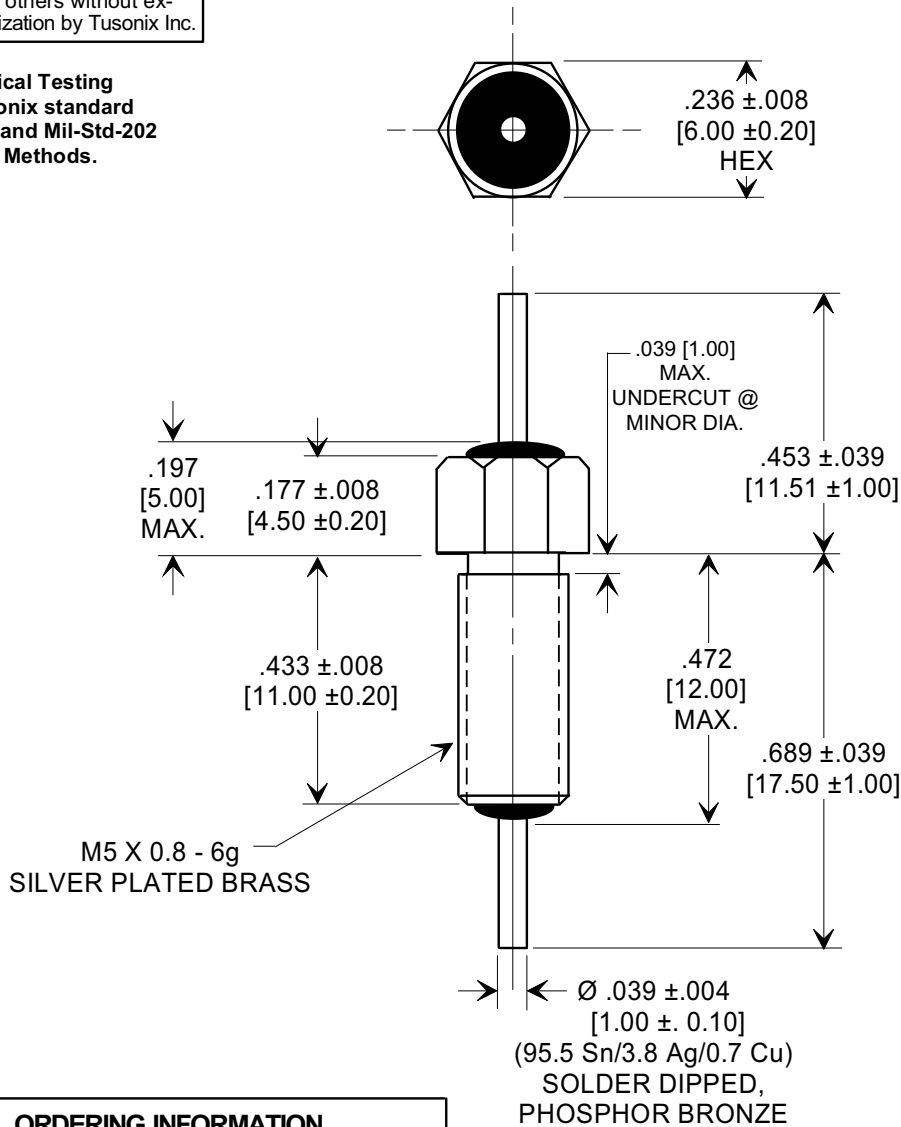

NOTES:

1. TUSONIX LF PART IS RoHS COMPLIANT.
2. NO MOUNTING HARDWARE SUPPLIED.
3. TUSONIX TRADEMARK, CAPACITANCE CODE AND TOLERANCE CODE STAMPED ON HEX, GREEN INK.
4. MOUNTING TORQUE: 3.5 LB IN. [0.395 N-M] MAX.

ORDERING INFORMATION

TUSONIX STYLE	2499
VALUE	5000 pF
VALUE TOL.	+80% -20%
TEMP. COEF.	X7W
RATING	500VDC @ +85°C
OPERATING RANGE	-55°C TO +125°C
CURRENT	10 A
D.F. MAX.	2.5 %
DIELECTRIC WITHSTANDING	500 VAC, 60 SEC. 1000 VDC 1-5 SEC.

X-2015 Rev-0 REVISION RECORD Original Release ECO-2603	A	--TOLERANCES-- Unless Otherwise Specified	Title BUSHING TYPE FEED THRU CAPACITOR		
					DECIMAL ± NOTED
			ANGLES ±	Drawn L.E. 01-17-12	Scale 3 X
			TUSONIX TUCSON, ARIZONA	Approved R.L. 01-17-12	
			A	2499-540-X7W0-502Z	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Tusonix / CTS:](#)

[2499-540-X7W0-502ZLF](#)