
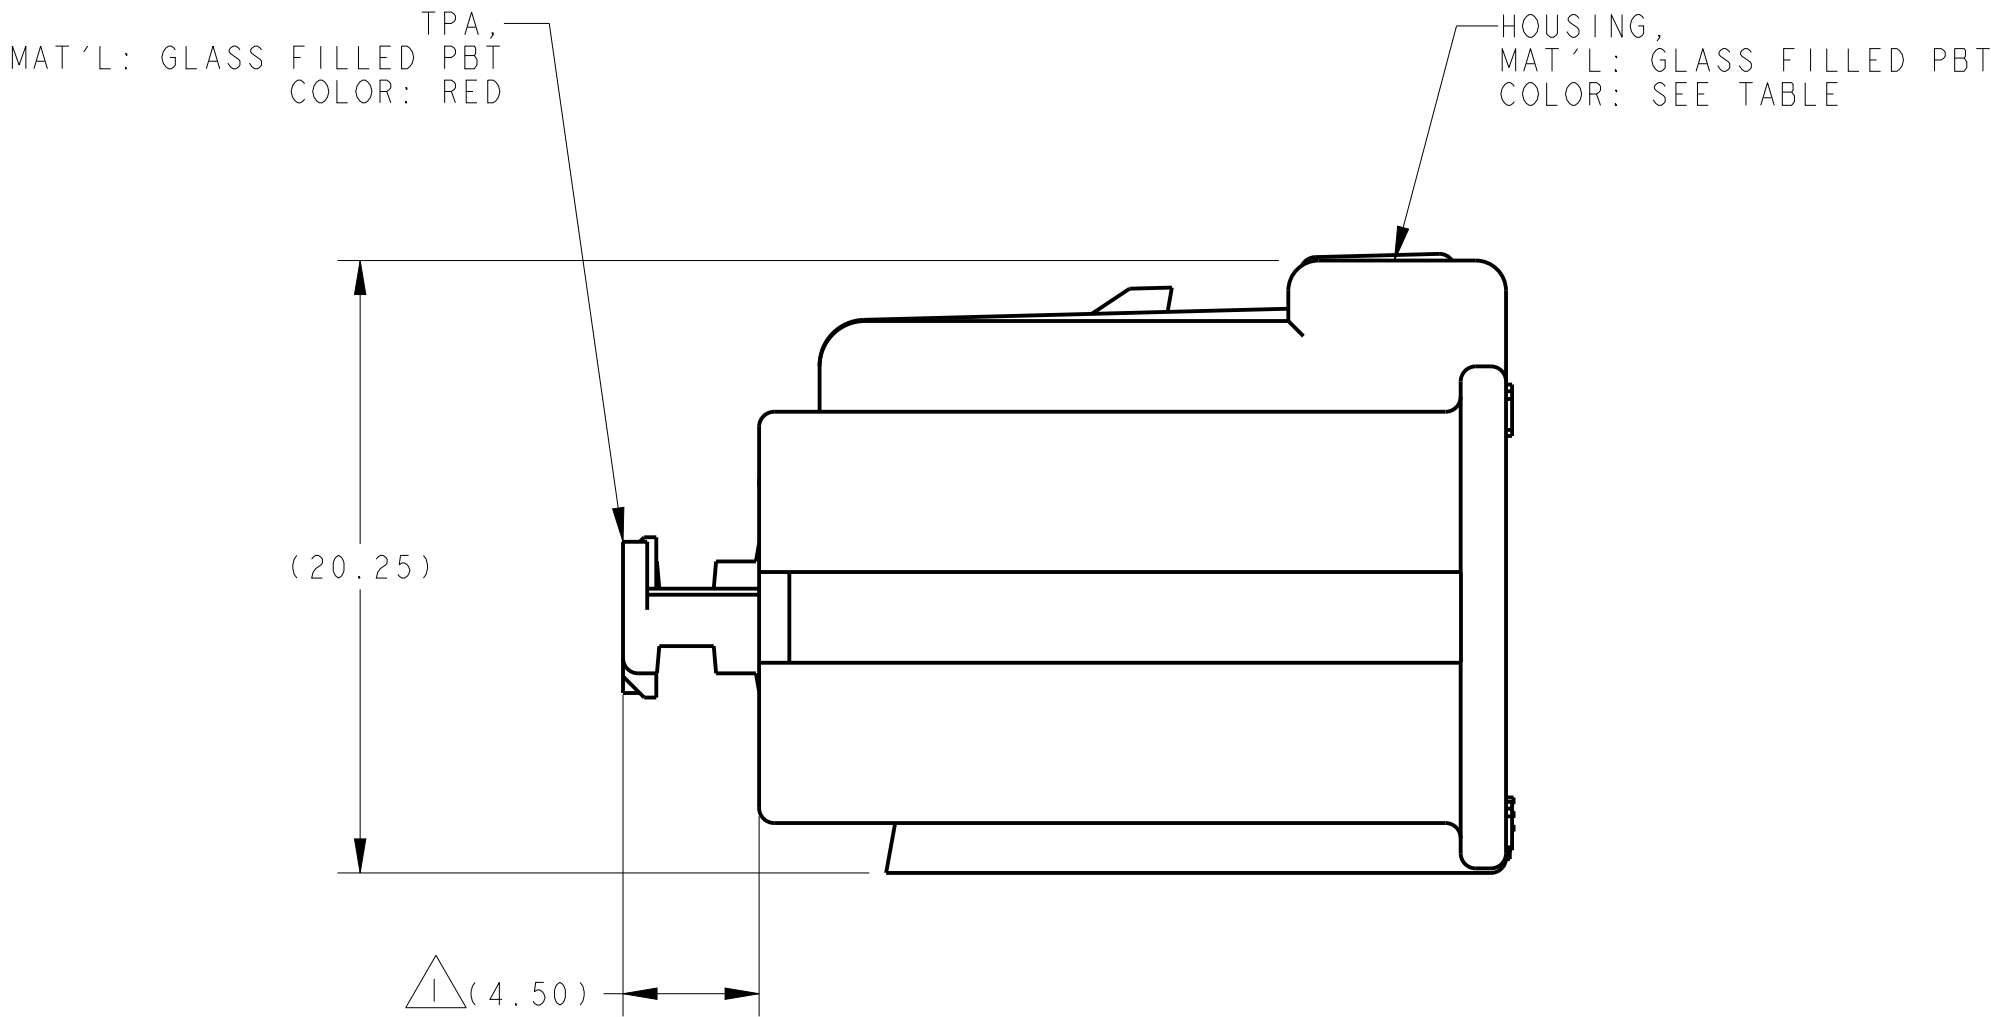
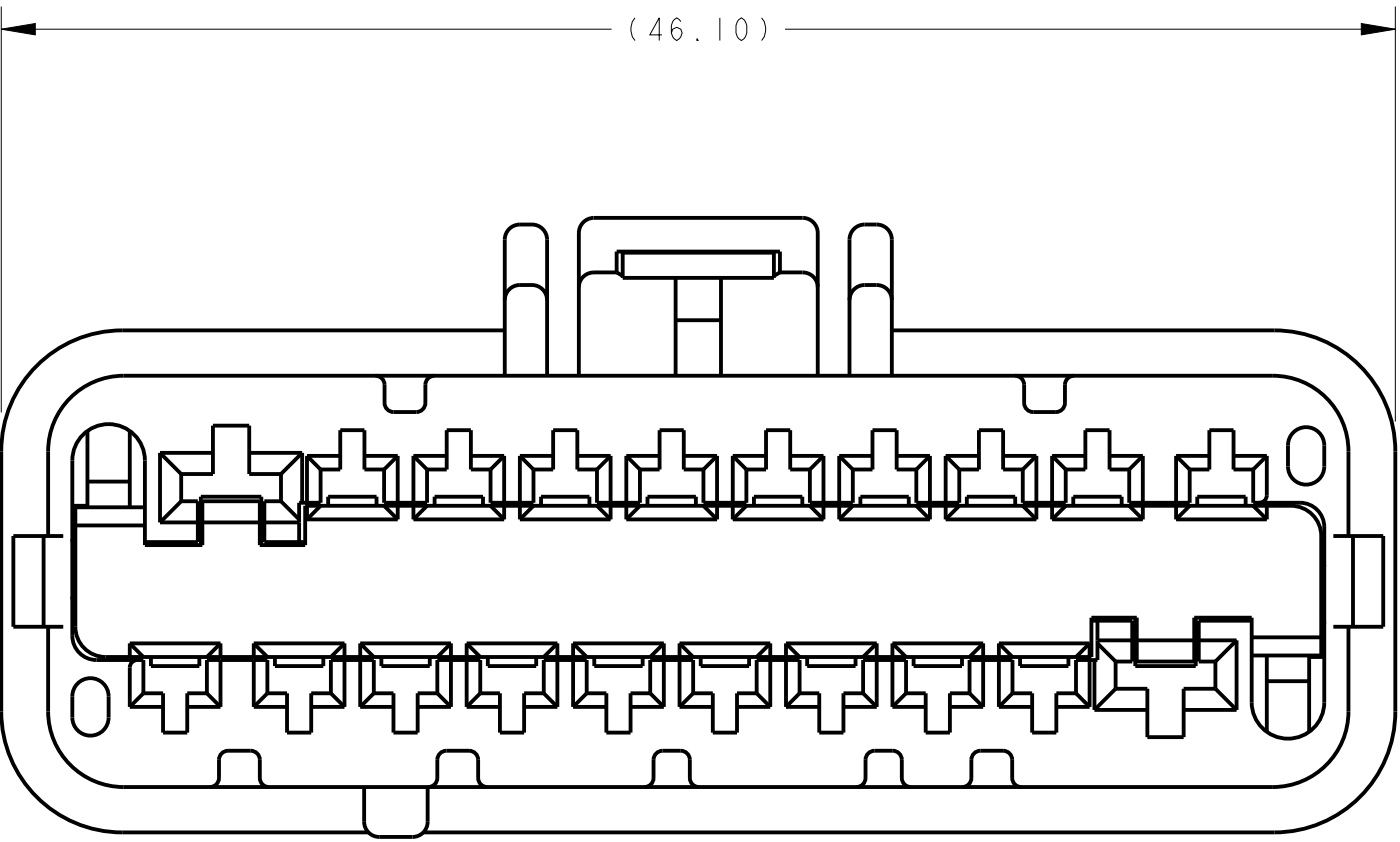


REVISIONS					
P.	LTR.	DESCRIPTION	DATE	DWN.	APVD.
1		PROPOSED	27AUG2009	JRS	BSB
2		REVISED PER ECO-10-003257	16FEB2010	JRS	BSB
A		ECR-10-025922	20DEC2010	HM	BB
A1		ECR-14-007751	30MAY2014	VP	ML

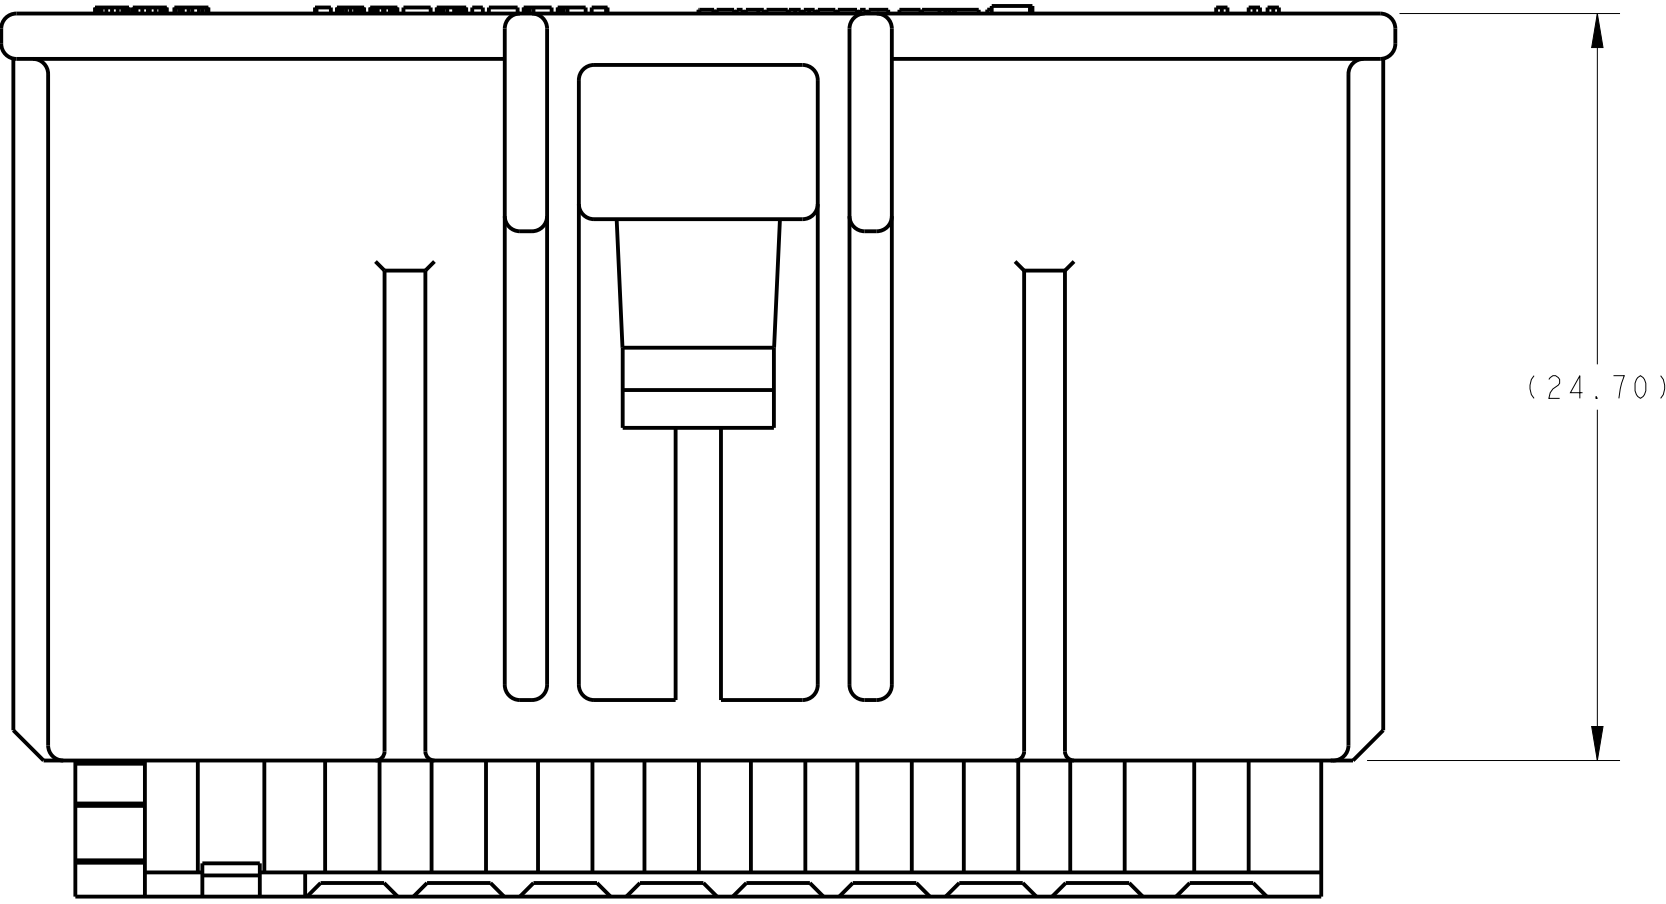

- ⚠ TPA SHIPPED IN STAGED POSITION.
2. THIS PLUG CONNECTOR MATES WITH CAP CONNECTOR, TYCO ELECTRONICS DRAWING NUMBER 2098380 AND IS INTENDED FOR CLASS 2 (105°C MAX) APPLICATIONS
3. SEE INSTRUCTION SHEET 408-10433.

C	Pin 1 location diagram for arrangement C. The pin 1 is located at the top center.
	Pin 1 location diagram for arrangement B. The pin 1 is located at the top center.
	Pin 1 location diagram for arrangement A. The pin 1 is located at the top center.
CODE	ARRANGEMENTS KEYING

2098377-4	A	YELLOW
2098377-3	C	WHITE
2098377-2	B	GRAY
2098377-1	A	BLACK
PART NUMBER	CODE	HOUSING COLOR

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN J. R. SHUEY 27AUG2009	TE Connectivity	
			CHK B. S. BUCHTER 27AUG2009		
DIMENSIONS:			APVD -	NAME	
mm				PLUG, 20 POSITION HYBRID, UNSEALED	
TOLERANCES UNLESS OTHERWISE SPECIFIED:			PRODUCT SPEC	1.5/2.8	
0 PLC ±.01			APPLICATION SPEC	-	
1 PLC ±.01			SIZE	A1	
2 PLC ±.01			CAGE CODE	2098377	
3 PLC ±.01			DRAWING NO.	-	
4 PLC ±.01			RESTRICTED TO	-	
ANGLES			WEIGHT	-	
FINISH			CUSTOMER DRAWING	-	
MATERIAL			SCALE	4:1	
SEE CALLOUT			SHEET	1 OF 1	
-			REV	A1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2098377-1](#)