
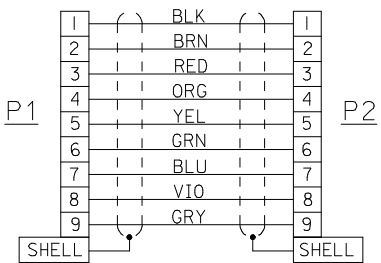


10	9	8	7	6	5	4	3	2	83421
MATERIAL NO.	ENGINEERING NO.	CUT LENGTH "A"	TOLERANCES	DIM "L"					
834219036	83421-9036	18.5 / 470.0	± .5 / 13.00	1.83 / 46.5					
834219037	93421-9037	36.5 / 927.1	± .5 / 13.00	1.83 / 46.5					
834219038	93421-9038	72.5 / 1841.5	± .5 / 13.00	1.83 / 46.5					
834219286	83421-9286	196.8 / 5000.0	±3.94 / 100.0	1.73 / 44.0					

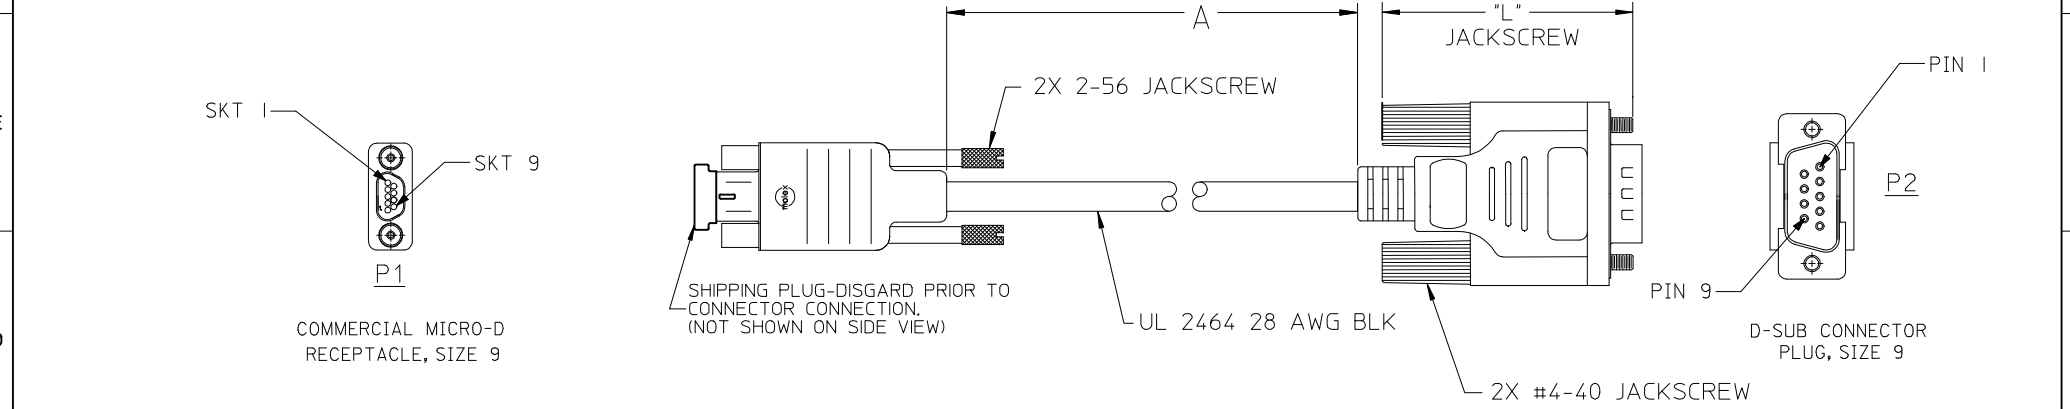

- NOTE: UNLESS OTHERWISE SPECIFIED.
- CABLE: UL 2464, 28 AWG. OR EQUIVALENT
9 TOTAL CONDUCTORS, TINNED COPPER, 7 STRANDS,
WIRE INSULATION: PVC.
SHIELD: AL-FOIL / MYLAR, INCLUDING DRAIN WIRE & BRAID
OUTER CABLE JACKET: PVC, COLOR BLACK.
 - REFER TO PS-83421-9000 FOR PRODUCT SPECIFICATION.
REFER TO DWG. E-83421-001 FOR ASSEMBLY INSTRUCTION.
 - MICRO D 9 SOCKET CONNECTOR:
INTERNAL INSULATOR: THERMOPLASTIC, UL 94V-0
CONTACTS: COPPER ALLOY, GOLD PLATE OVER NICKEL PLATING.
MOLEX CONTACT # 83000-9503
INTERNAL BACKSHELL: NICKEL PLATED STEEL.
EXTERNAL SHROUD: NICKEL PLATED STEEL.
EXTERNAL INSULATOR: BLACK MOLDED PVC.
 - D-SUB HIGH DENSITY 9 PIN MALE CONNECTOR (SOLDER TYPE)
WITH OVERMOLDED INSULATOR.
 - MARKING: NONE.
 - ASSEMBLY IS RoHS COMPLIANT.

REV LETTER "I" WAS INTENTIONALLY NOT USED

REMOVE 834219289 EC NO: WNA2010-0093 DRWN:BRUPERT 2009/08/17 CHKD:BRUPERT APPR:JFMURPHY 2009/09/23 H	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY DATE J.LOMASTRO 02-17-06		TITLE CABLE ASSEMBLY 9 SKT COMM. MICRO D 9 PIN D-SUB		
			4 PLACES	± ---	± ---	CHECKED BY DATE R.DEROSS 02-21-06				
			3 PLACES	± ---	± .005	APPROVED BY DATE R.DEROSS 02-21-06		MOLEX INCORPORATED		
			2 PLACES	± 0.13	± .020	MATERIAL NO. SEE CHART				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[83421-9286](#)