

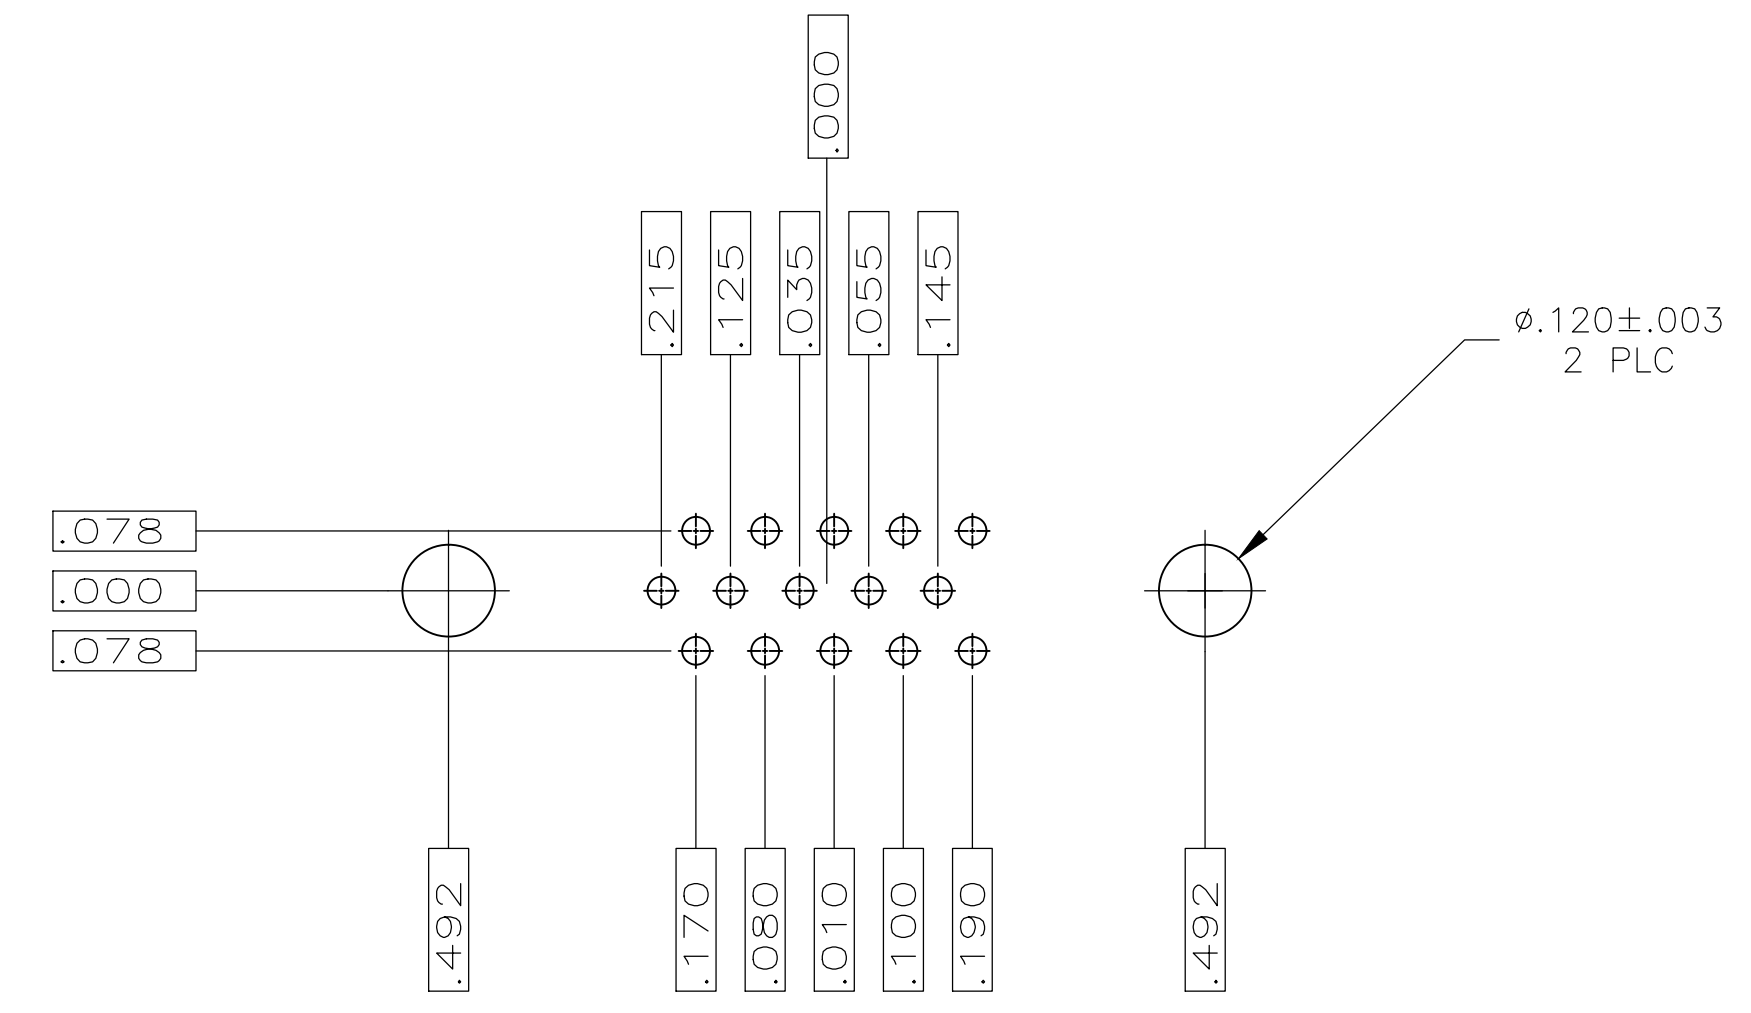
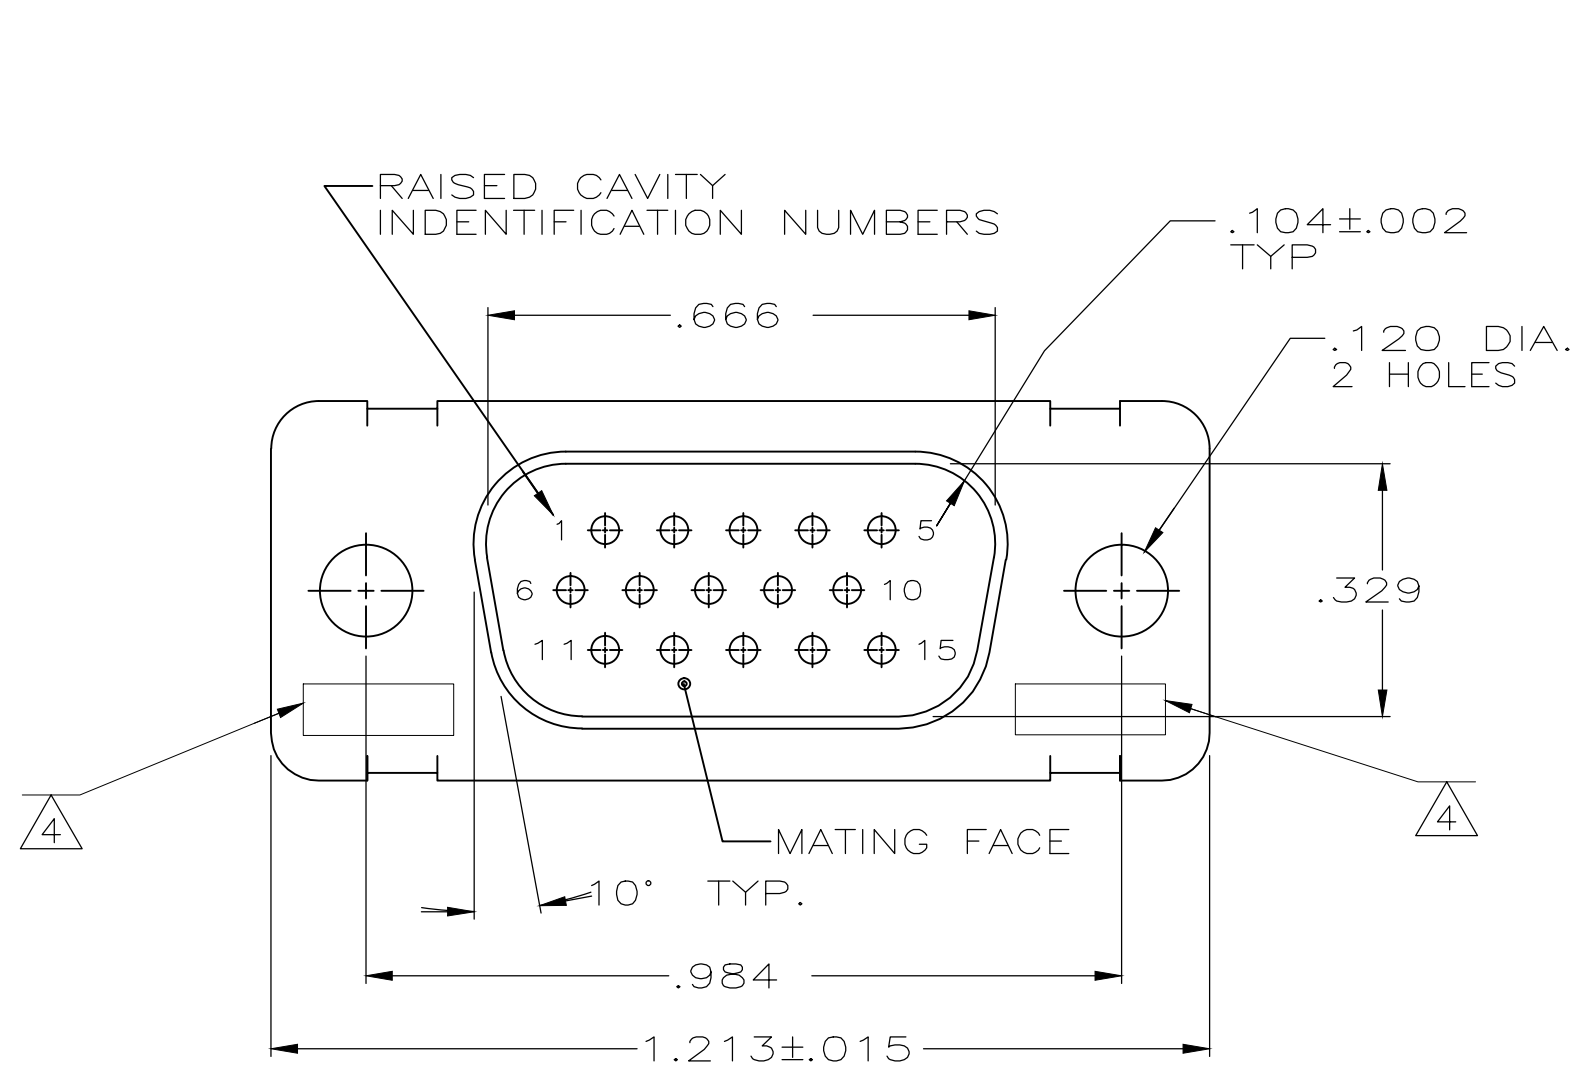


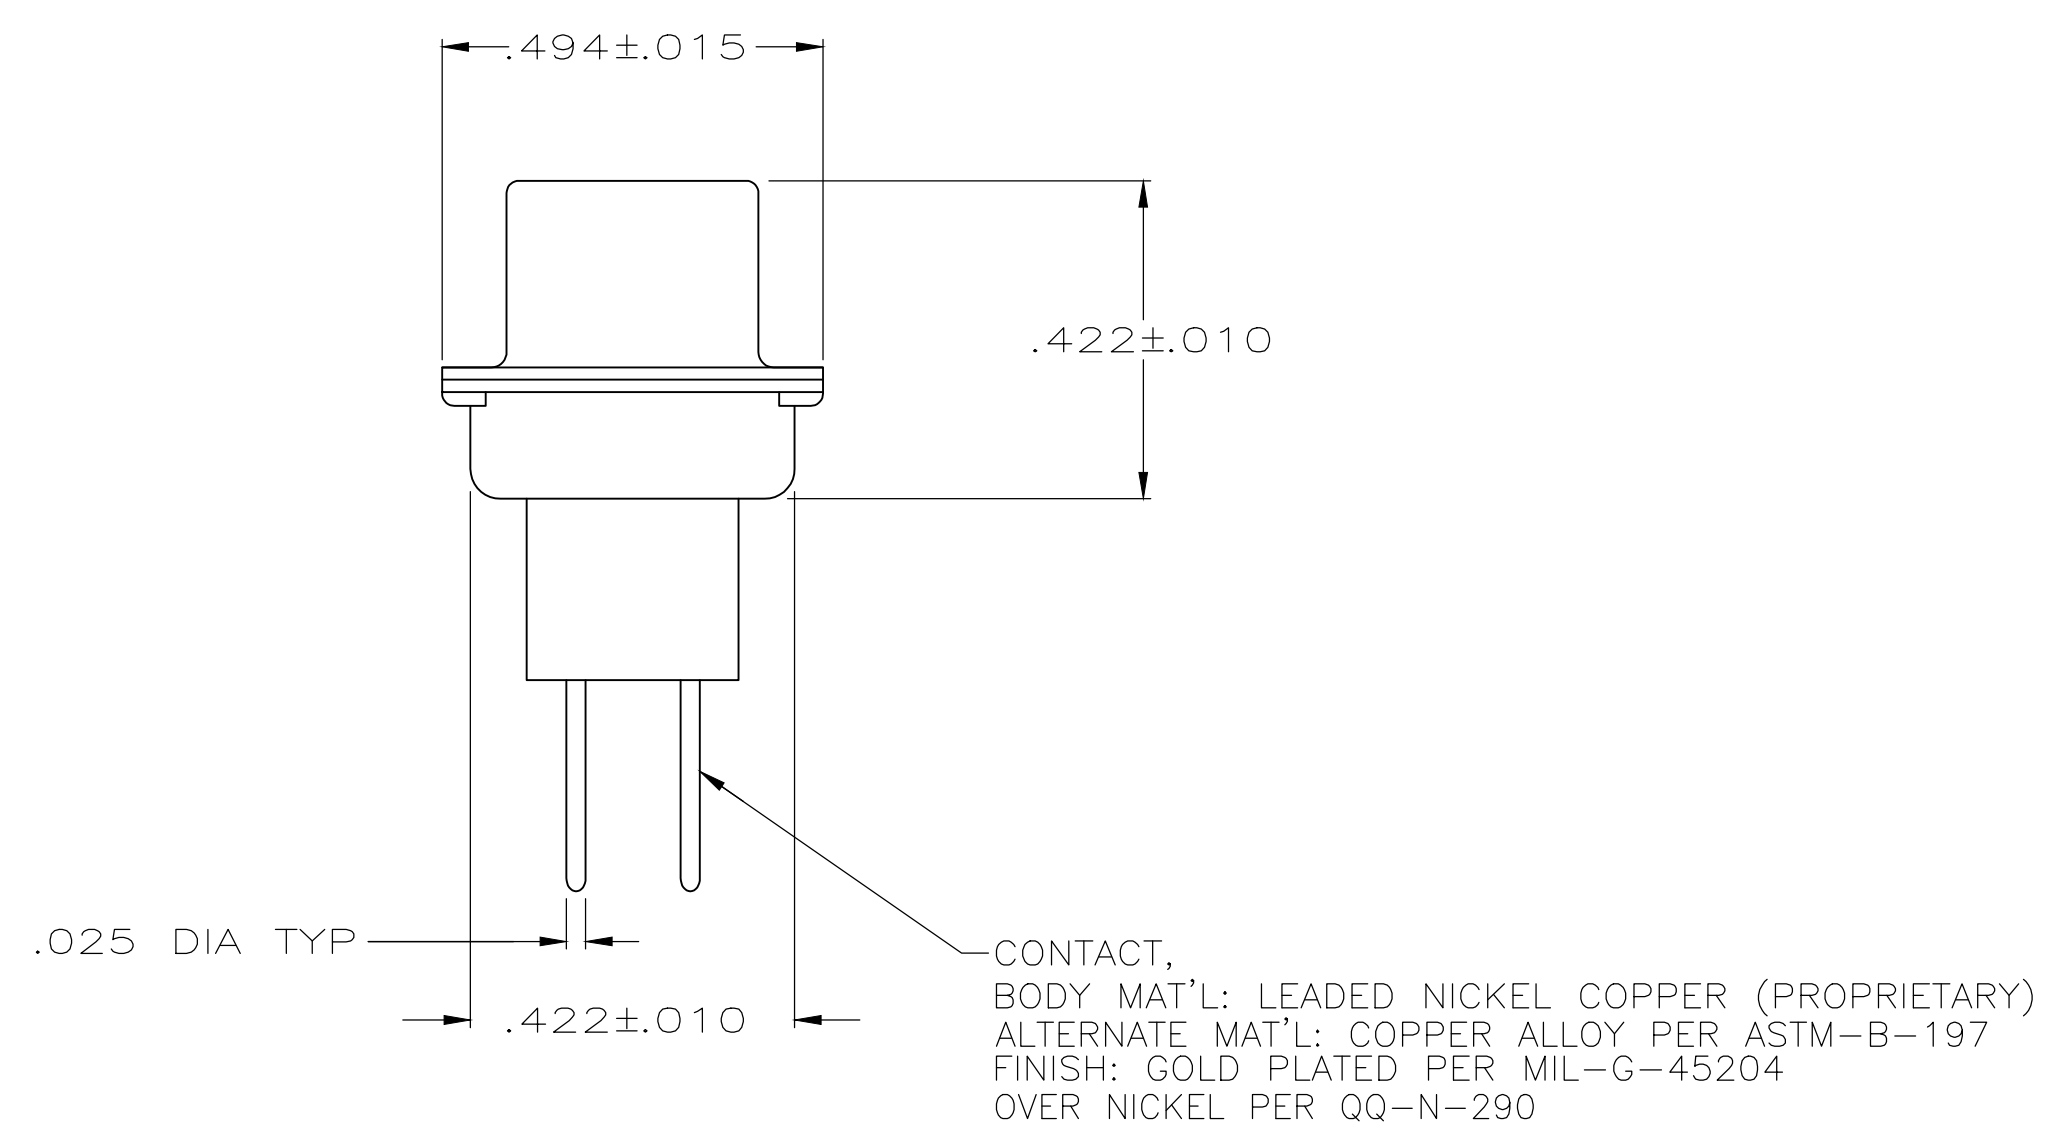

RECOMMENDED P.C. BOARD LAYOUT

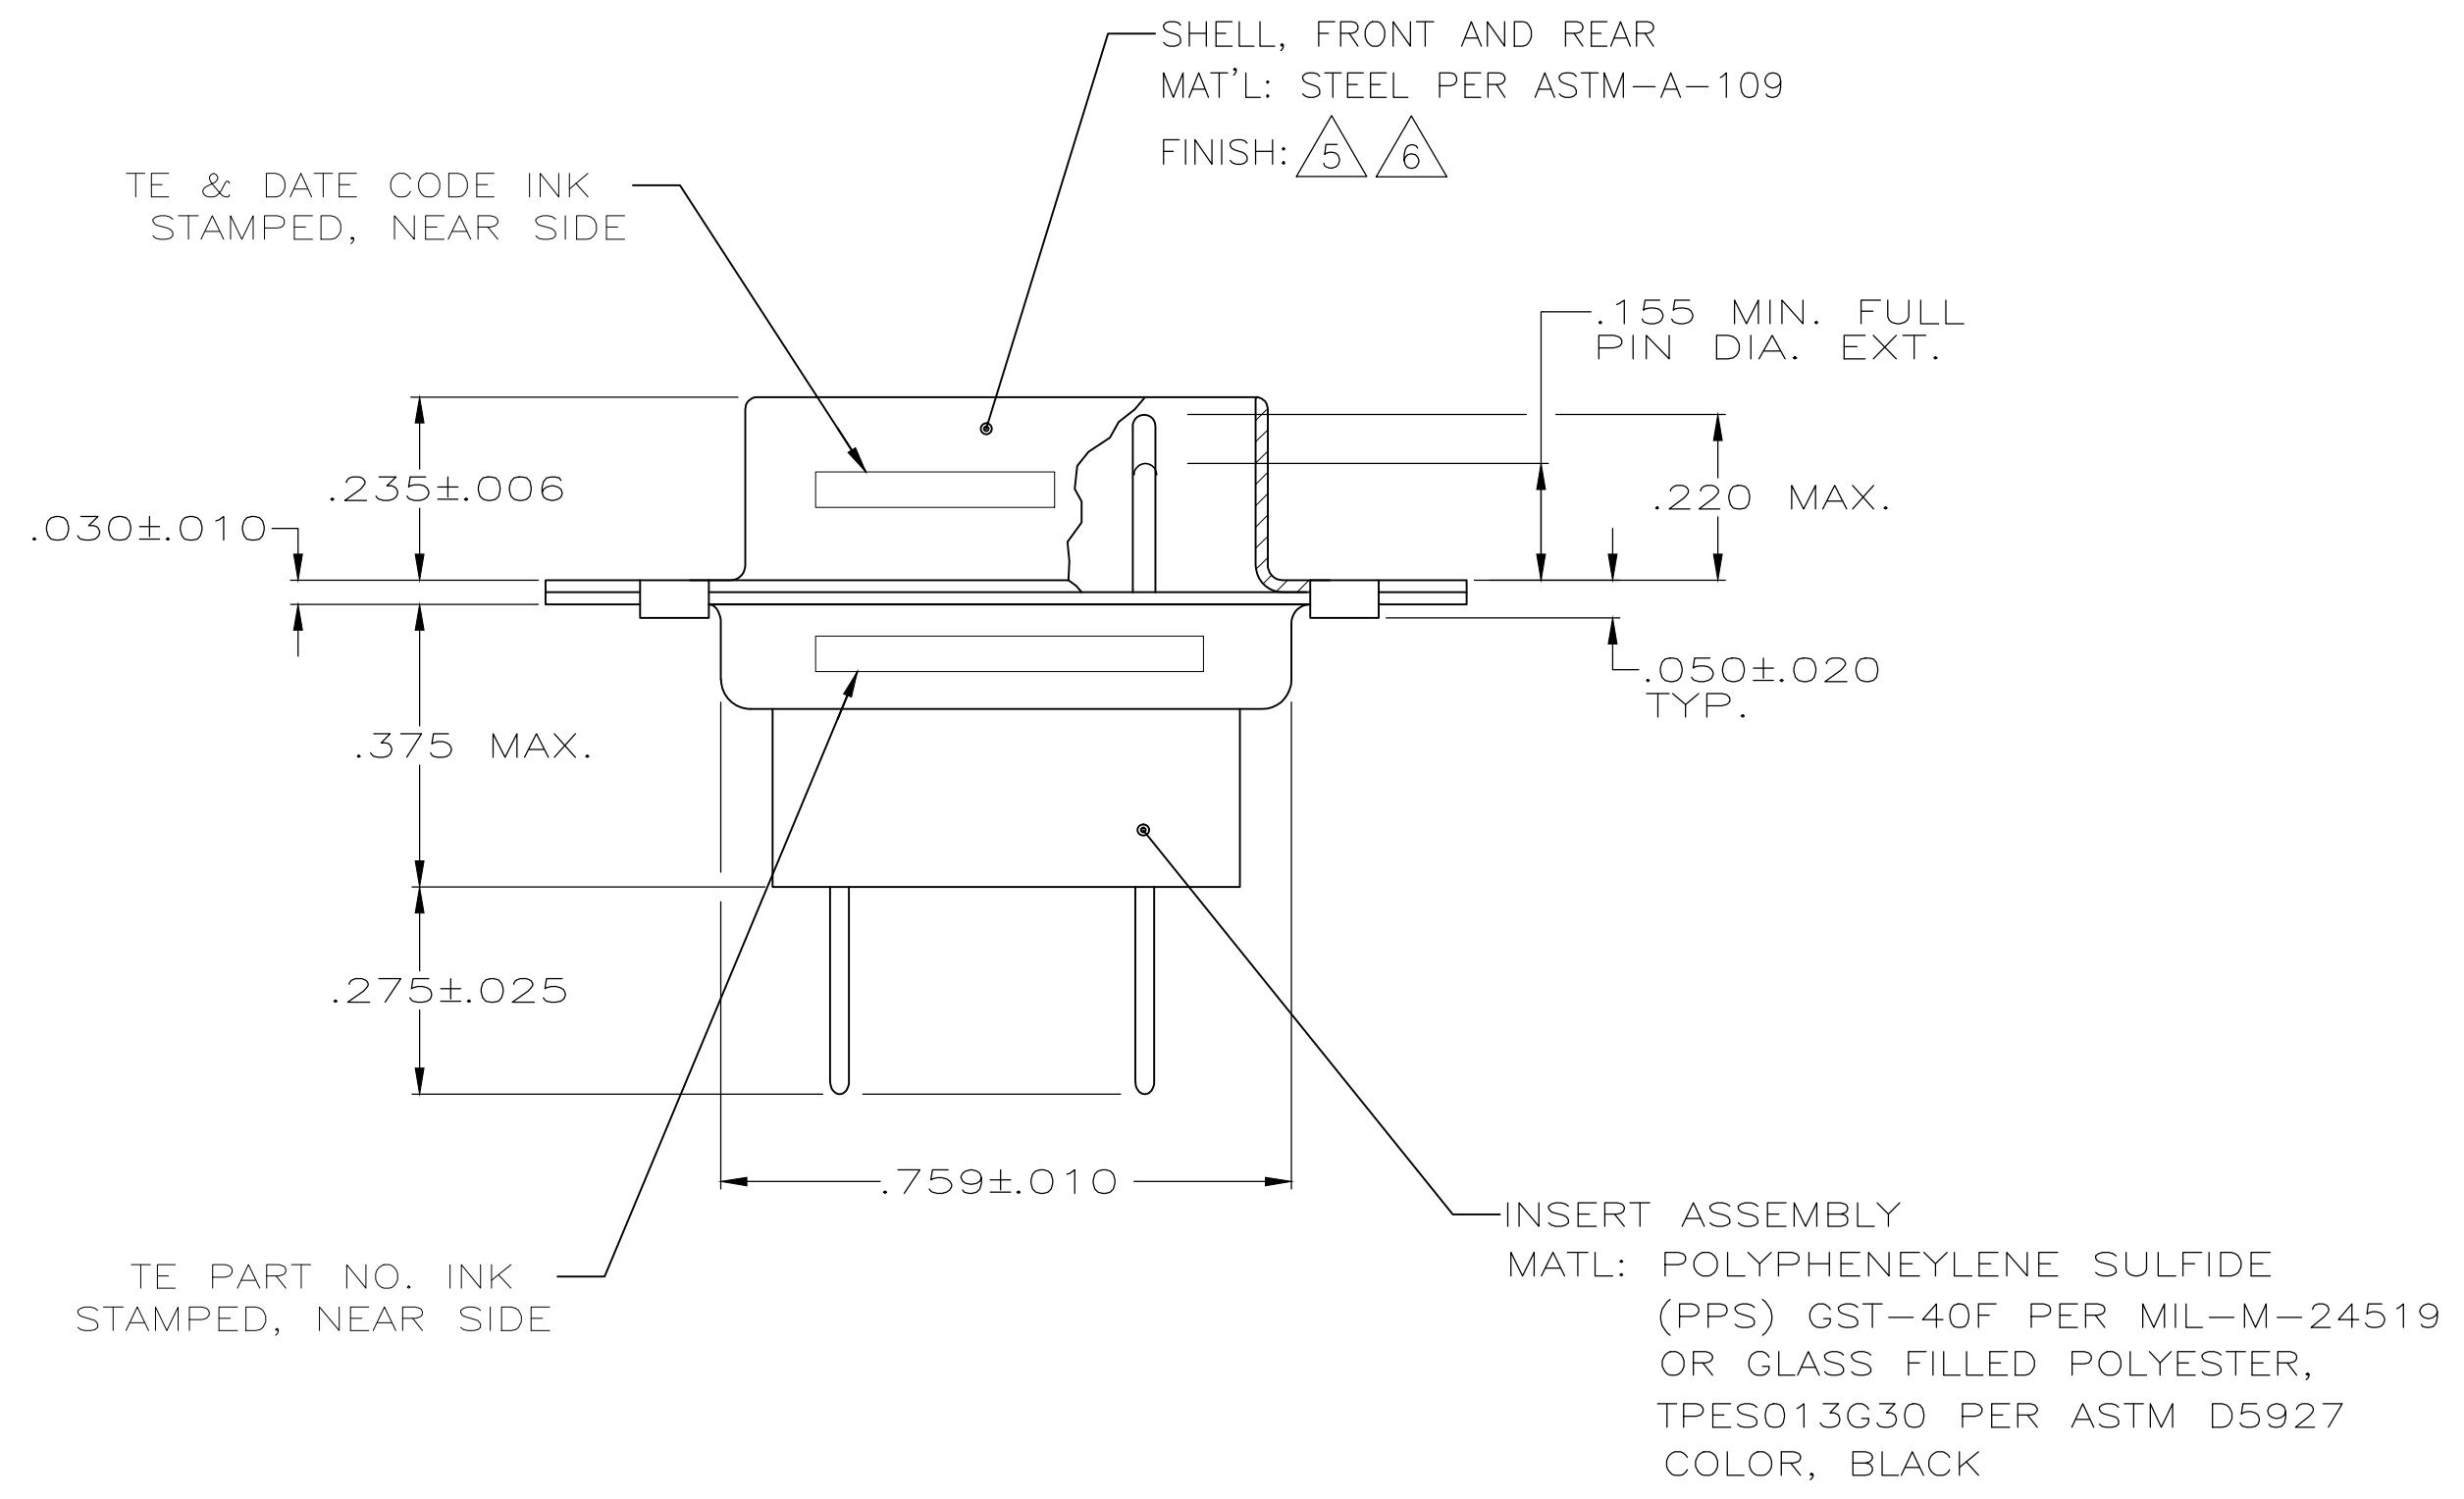

- .040 DIA HOLE IS RECOMMENDED FOR P.C. BOARD
- CONNECTOR MATES WITH ANY TE 15 POSN RECEPTACLE
- REPLACEMENT PIN TE# 207683-8
- UL/CSA DESIGNATION STAMPED IN THIS AREA.
- FINISH: CADMIUM PER QQ-P-416
- FINISH: ZINC PLATED PER ASTM-B-633, .000200-.000400 THK WITH SUPPLEMENTARY CHROMATE (Cr3+)

PLATED PER 6	5-208866-1
PLATED PER 5	208866-1
DESCRIPTION	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
RAGHAV SATISH
CHK
CHARLES THOMAS
APVD
CHARLES THOMAS

24JUN2015
24JUN2015
24JUN2015

DIMENSIONS:
INCHES

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .005
4 PLC ± -
ANGLES ± -

MATERIAL
SEE CALLOUTS

PRODUCT SPEC

APPLICATION SPEC

WEIGHT -

CUSTOMER DRAWING

NAME
AMPLIMITE 15 POSN PLUG ASSY

SIZE
A1

CAGE CODE
00779

DRAWING NO
208866

RESTRICTED TO
-

SCALE
4:1

SHEET
1

OF
1

REV
L

TE Connectivity

AMPLITE 15 POSN PLUG ASSY

TE Connectivity

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[208866-1](#)