

Kabellüle PG12, Plug, solder terminal, insulated, 7.5 mm, 6-pole, straight, UK-Connector



#### Description

- Solder terminal :  
for cable mounting
- Data and Signal transfer
- Data and Signal Connectors 6-pole , insulated , straight

#### References


Last order date: 30.06.2016

#### Technical Data

Diameter	7.5 mm	Allowable Operation Temperature	-20 °C to 70 °C
Number of Poles	6-pole	Terminal	solder terminal
Ratings DC	2A / 12VDC	Housings	insulated
Ratings AC	2A / 12VAC	Style	straight
Dielectric Strength	1000VDC	Lifetime	50000 Insertions
Insulation Resistance	> 10000 MΩ @ 500VDC		
Material: Housing	black		

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)

#### Dimensions

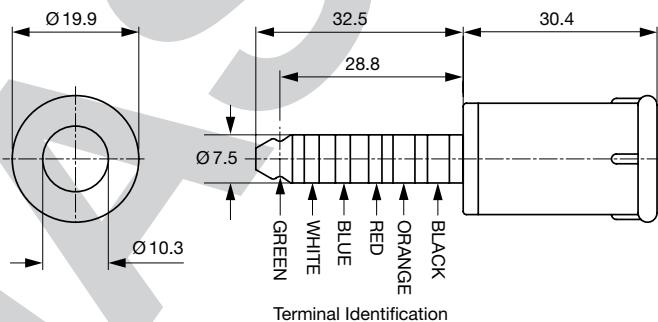

#### All Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
Data and Signal Plug/ Sockets	7.5	6-pole	solder terminal	<a href="#">4804.1600</a>

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging unit 100 Pcs

## Accessories

## Description



4804.0001

Sleeve black, 5.6 mm

PHASE! YOU

27.03.2017

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schurter:](#)

[4804.16](#)