







Amphenol
FCi

© 2016 AFci



PRODUCT NR.	DIM "A"
88956-X01LF	5.00 REF.
88956-X11LF	3.35 REF.
88956-X20LF	5.76 REF.

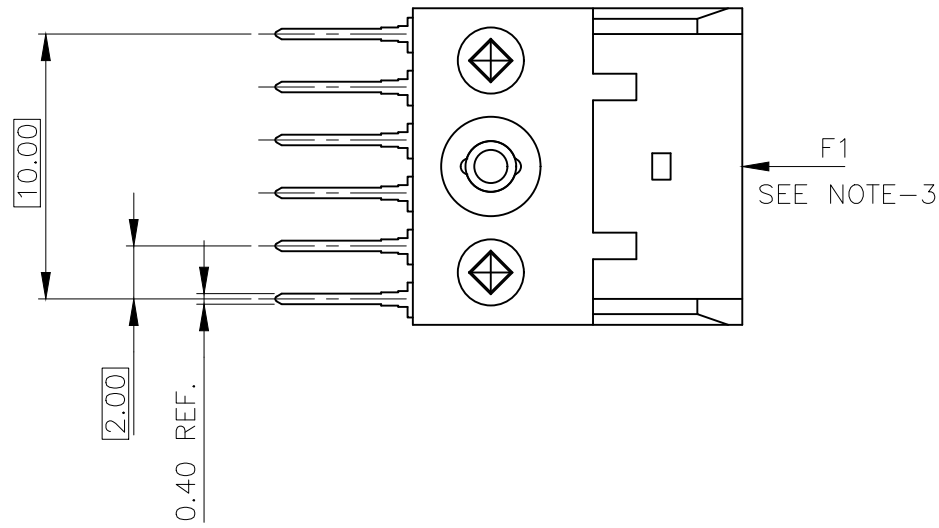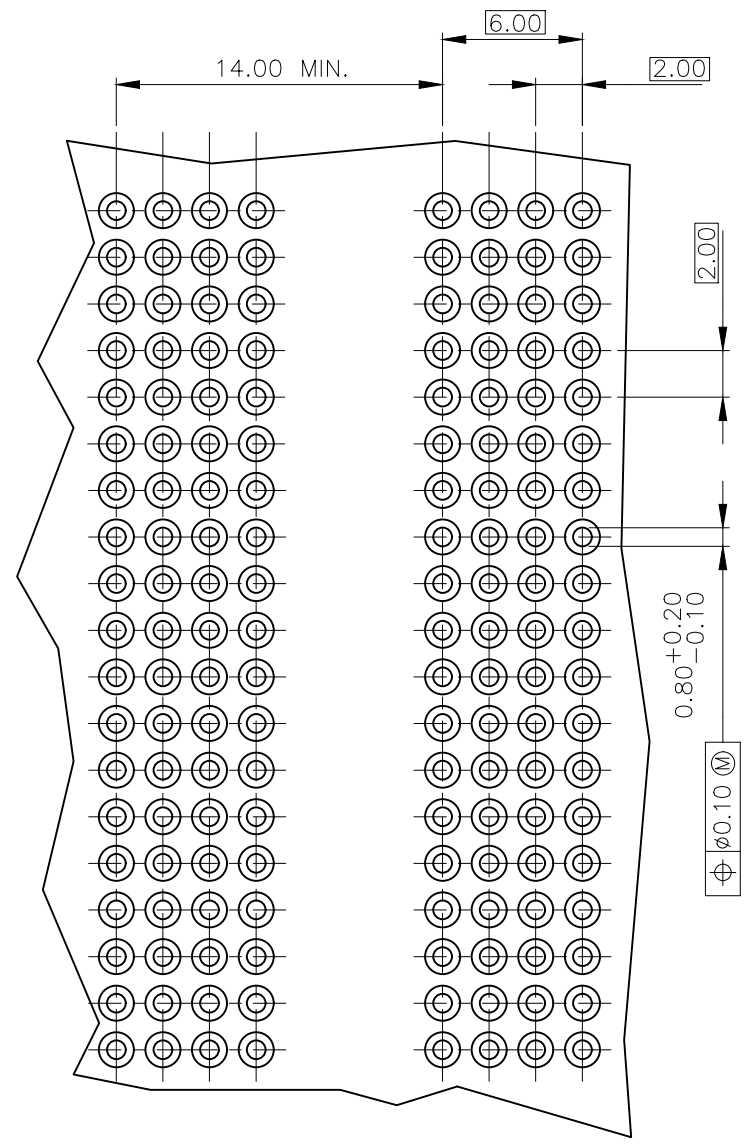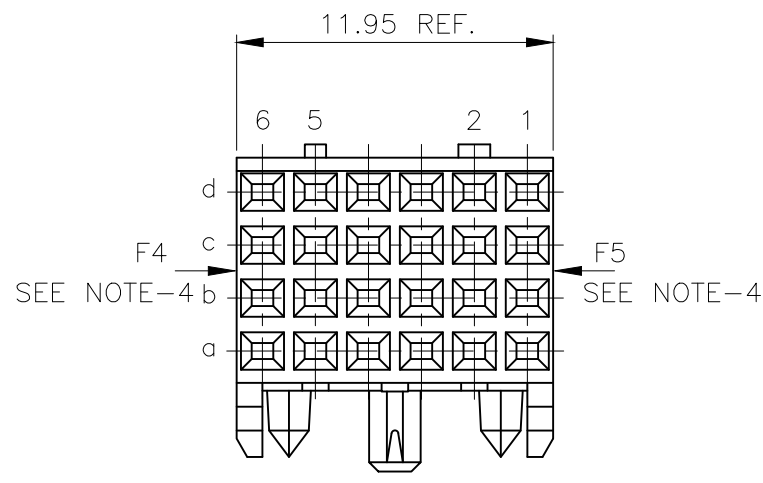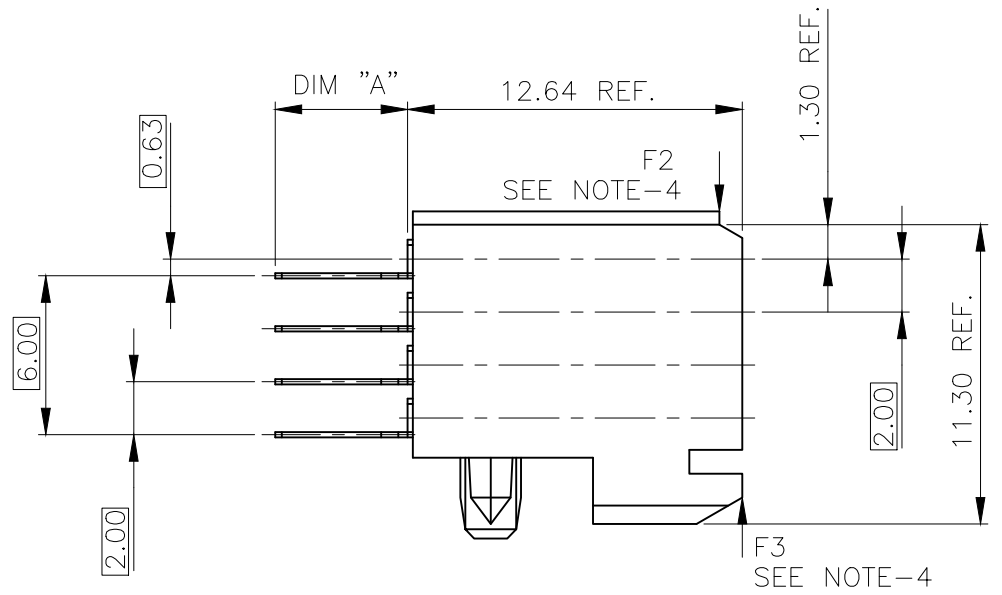

REFER NOTE-2
88956-XYLFF

NOTES:

1. MATERIAL : BODY : LCP UL94-V0
: CONTACT : COPPER ALLOY.
2. FOR PLATING PERFORMANCE REFER DRAWING # 10159408
3. LOAD IN THIS DIRECTION (E.G. THROUGH CODING) 30 NEWTON MAXIMUM PER CONNECTOR.
4. LOAD IN THIS DIRECTION 15 NEWTON MAXIMUM PER CONNECTOR.
5. TO ENSURE PROPER ALIGNMENT OF MULTIPLE MODULES ON A BOARD THE USE OF A FIXTURE IS RECOMMENDED.
6. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47- 0004.
7. THE HOUSING WILL WITHSTAND EXPOSURE TO 260° PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
8. A SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

RECOMMENDED HOLE PATTERN,
COMPONENT SIDE.

mat'l. code				surface ISO 1302	tolerance ISO 406	projection ISO 1101	product family METRAL			
ltr	ecn no	dr	date	tolerances unless otherwise specified		 mm scale —	title			
J	DG08-0171	TER	2006-08-26	angles linear	.X±0.3		STR FEMALE STB SIGNAL 12MM			
K	DG09-0068	CENH	2009-06-06		.XX±0.13					
L	ELX-I-38913	MINI	2020-10-23		.XXX±0.050					
				dr	R RIJKEN	1991-04-23	dwg no		sheet 1 of 1	size
				enr	ARUN	2020-10-23	Amphenol FCi		88956	
				chr	ALEX BABU	2020-10-23			A3	
				appd	SANOJ	2020-10-23	type		Product Customer Drawing	
sheet index	revision sheet	L	1							