




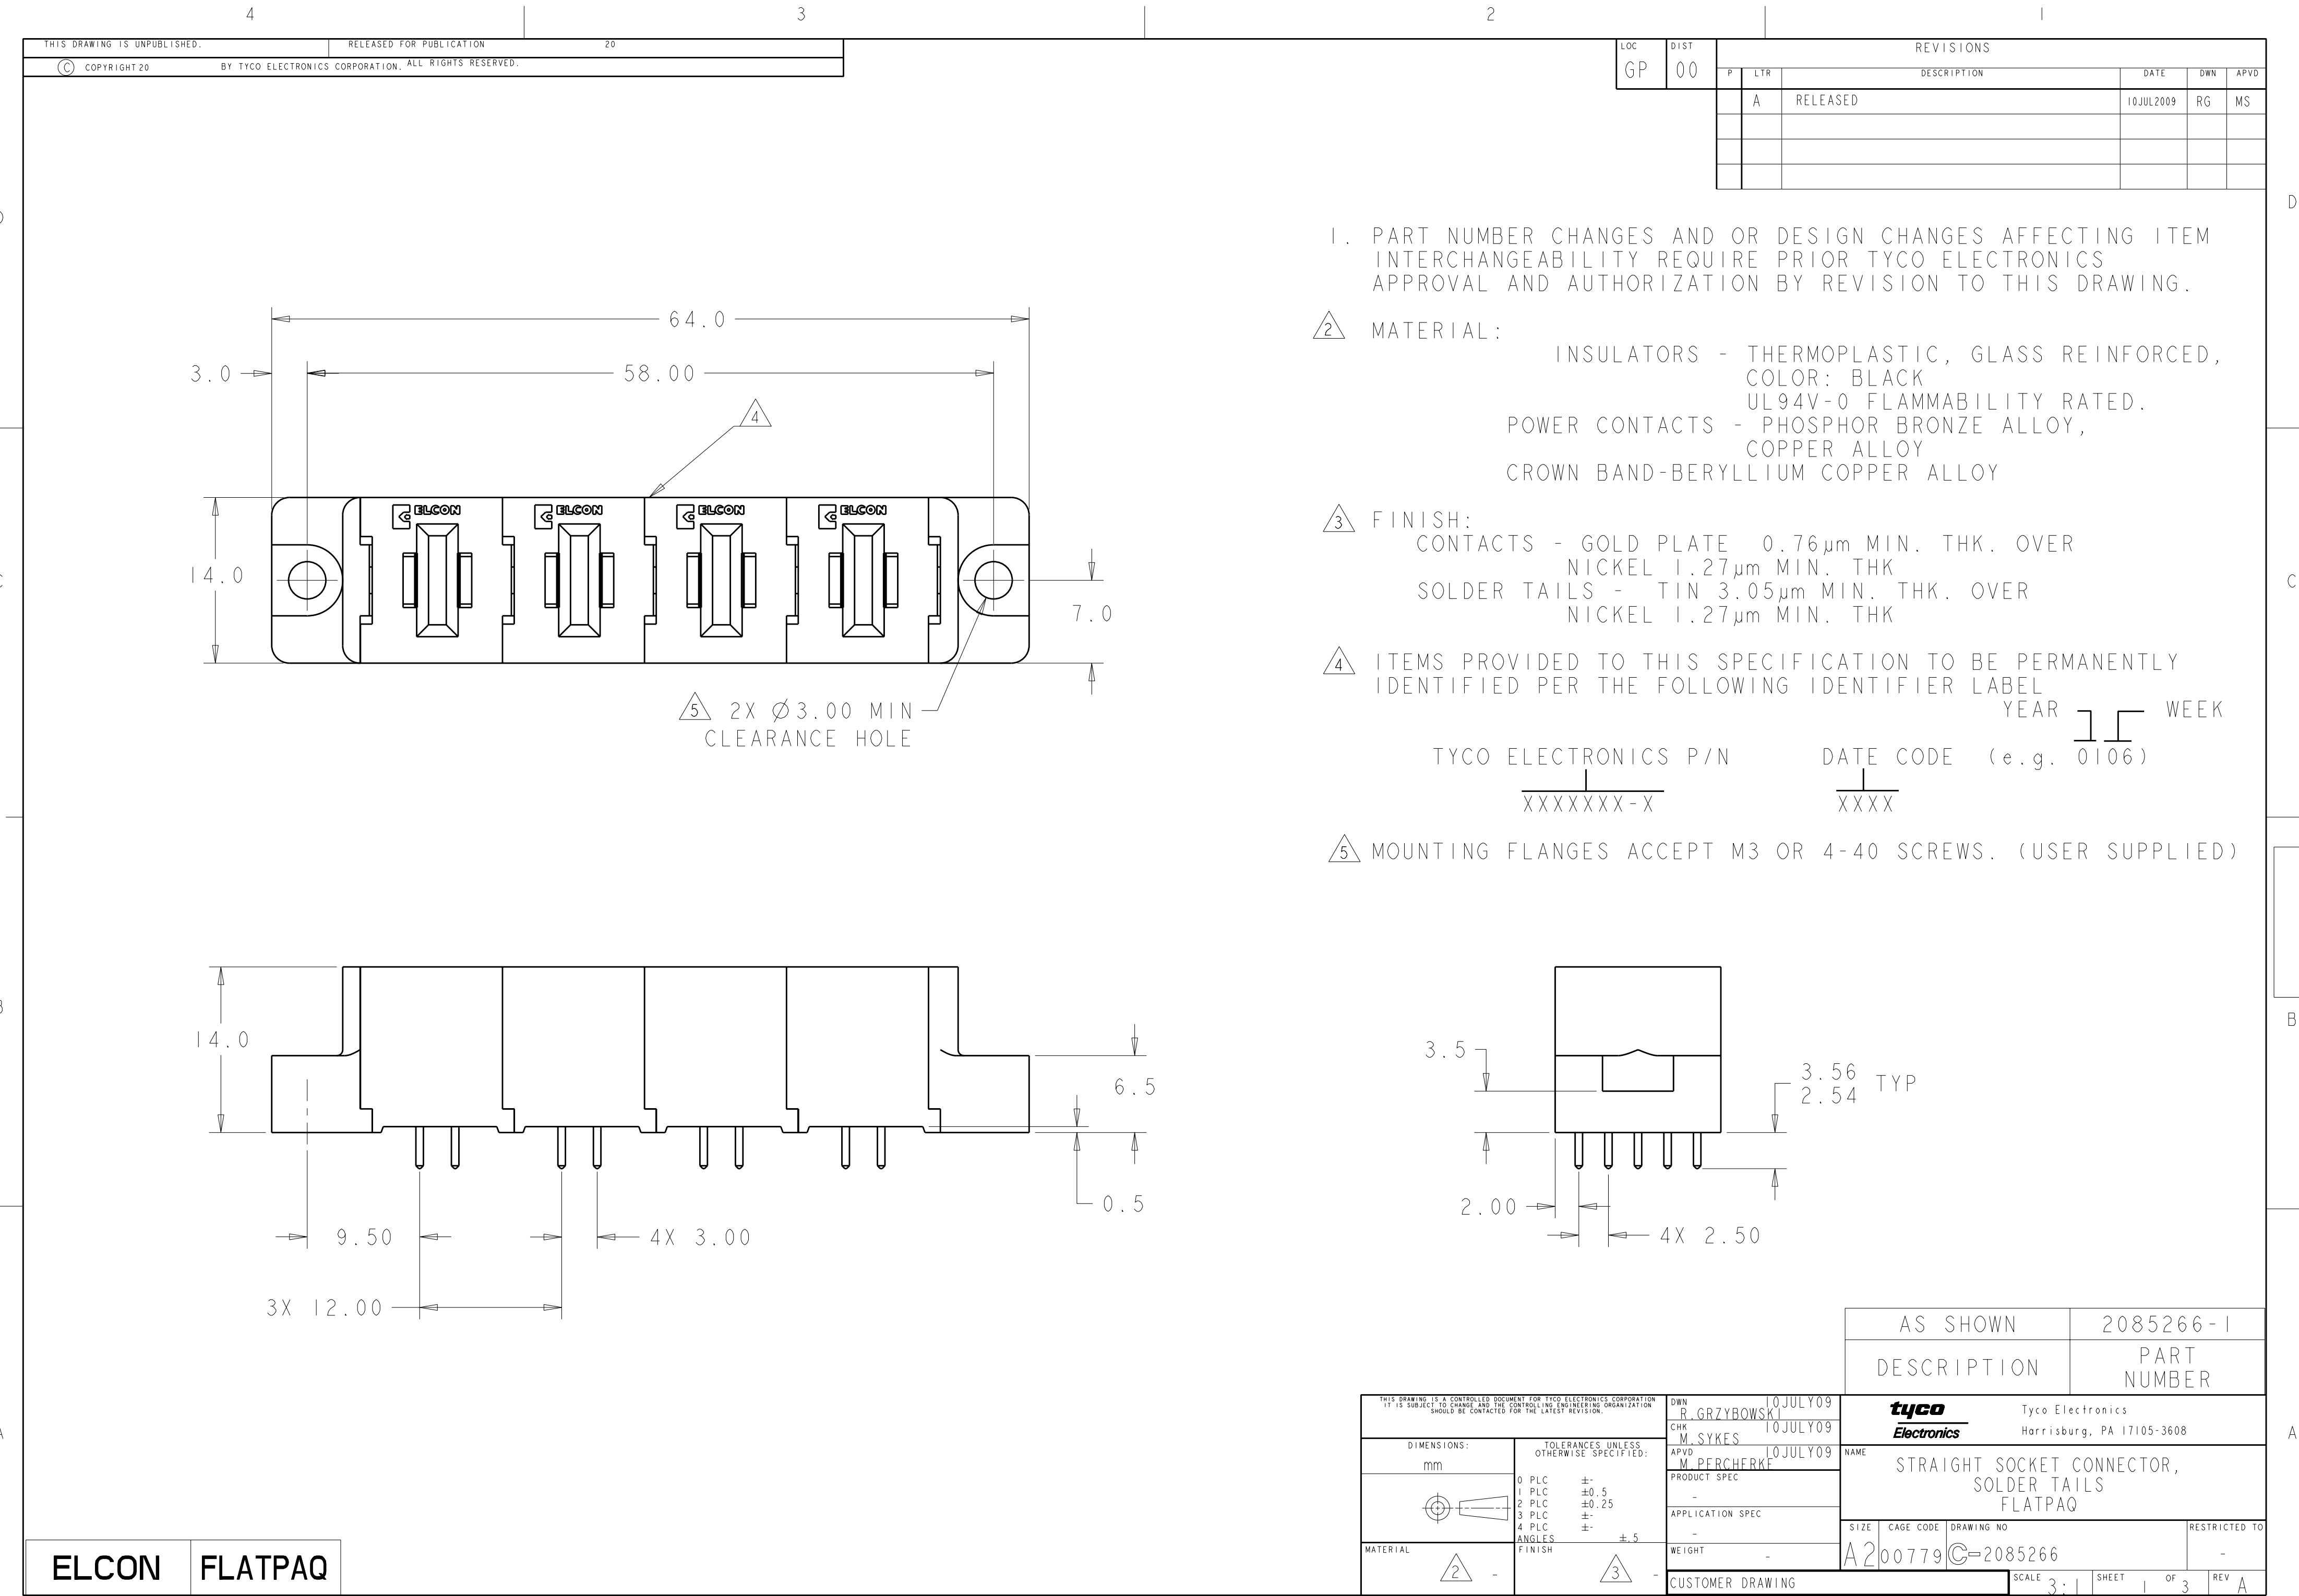

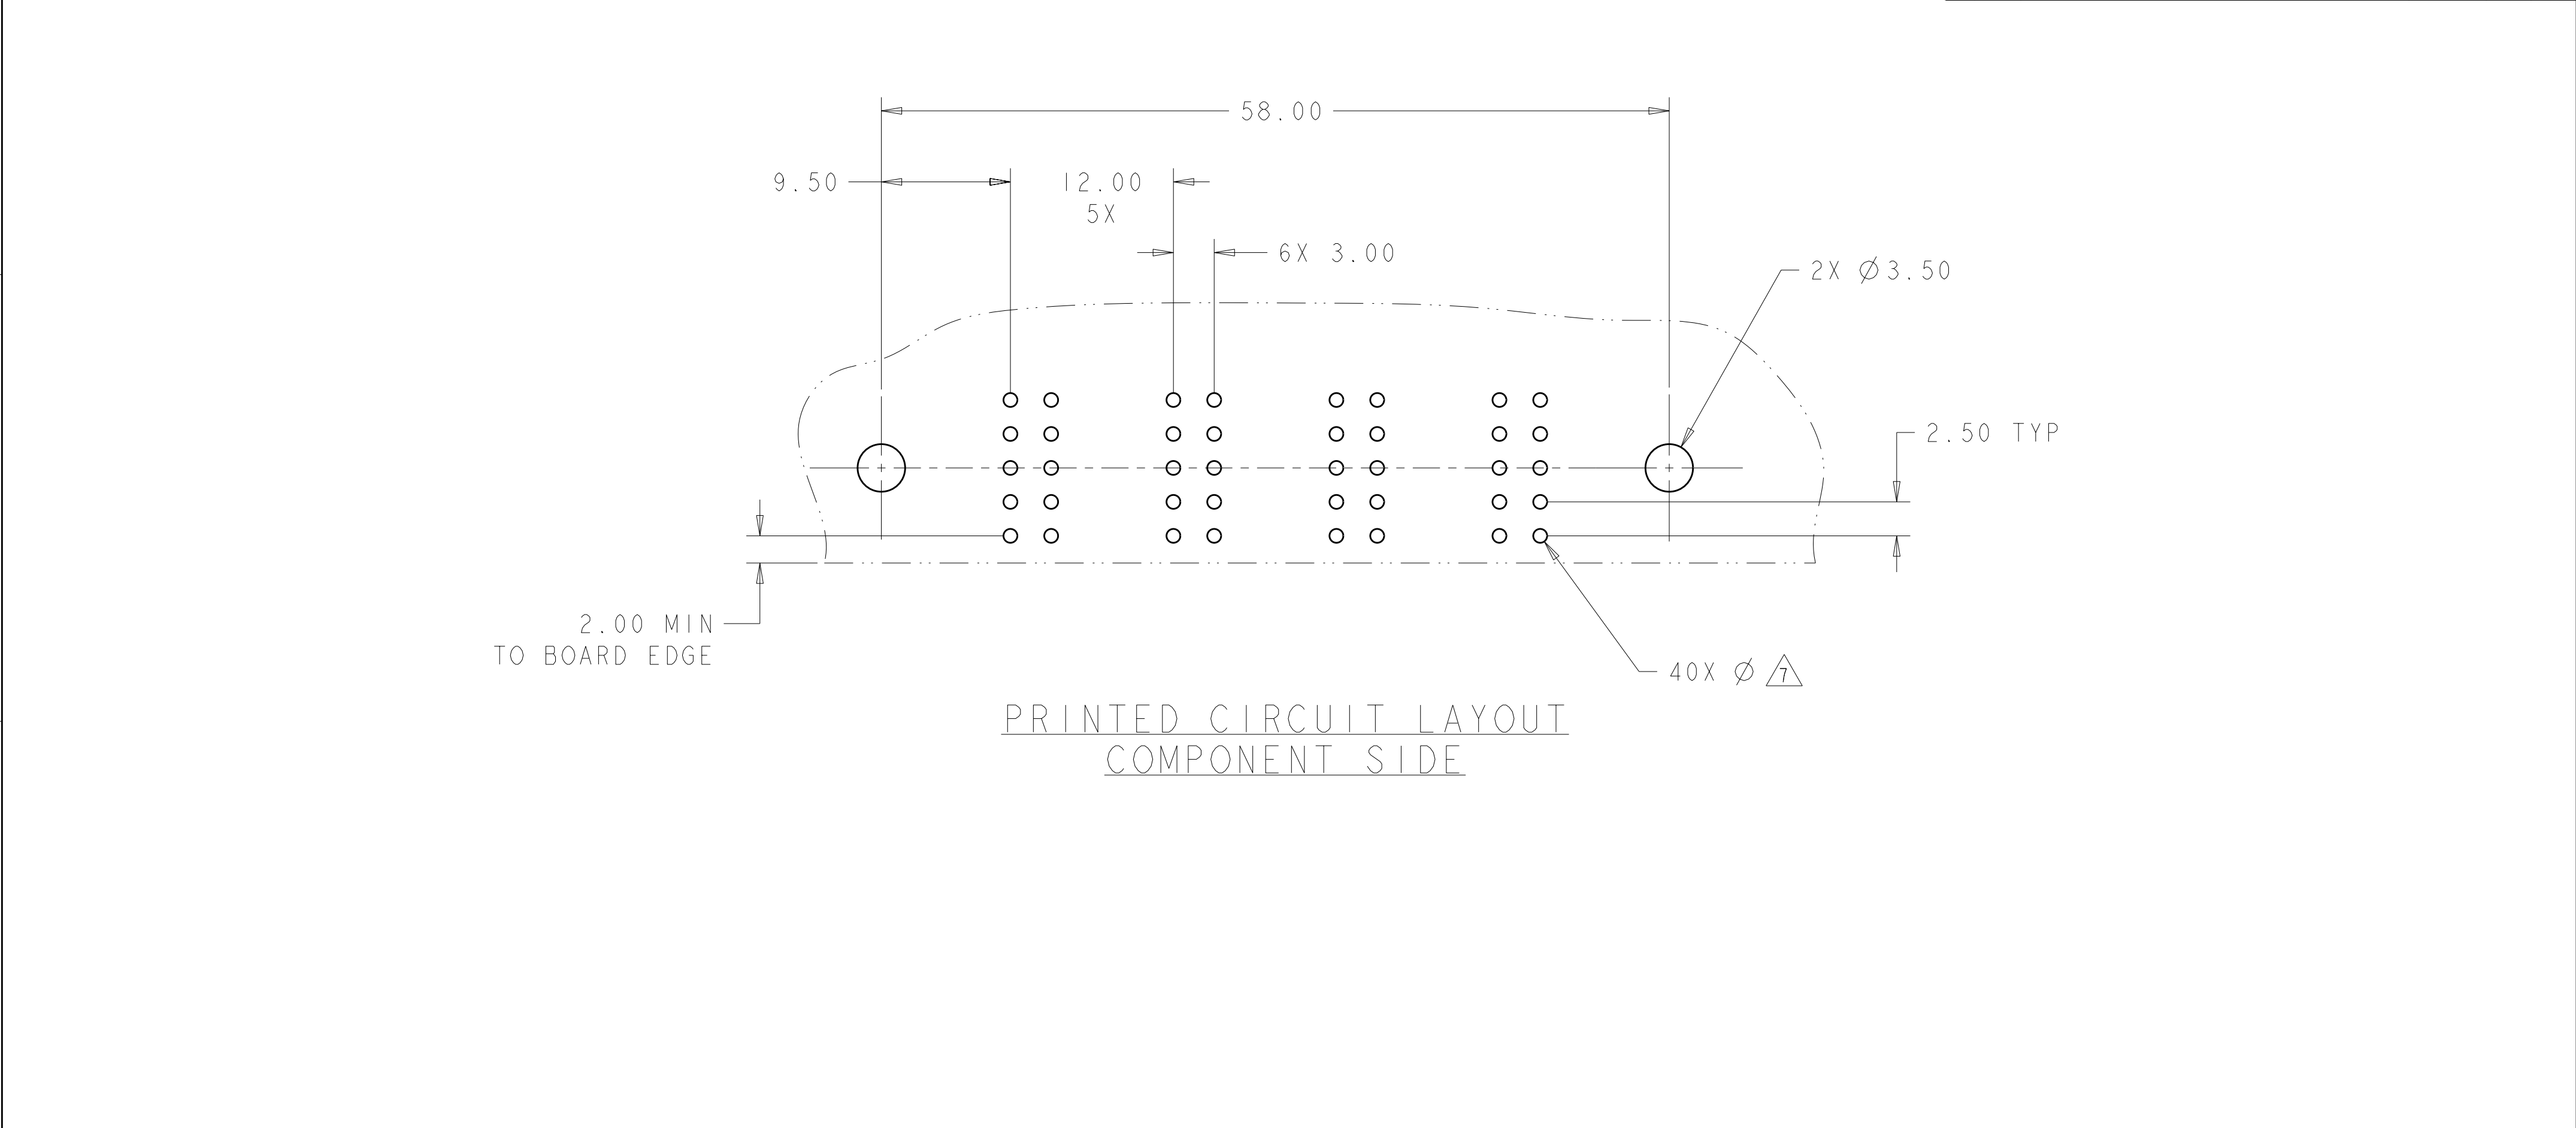


CONNECTOR	CATALOG MODULE #	QTY	SIZE NO.	CONTACT QTY	MATING PIN	MAX. CURRENT (PER CONTACT)	CONTACT SPACING	VOLTAGE RATING
SOCKET	FP154	4	8	4	1.25 X 7.00	35 amps	12.00	600 VOLTS
	FP500	1	LEFT MOUNTING FLANGE					
	FP501	1	RIGHT MOUNTING FLANGE					

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			-	SEE SHEET 1	-	-	-

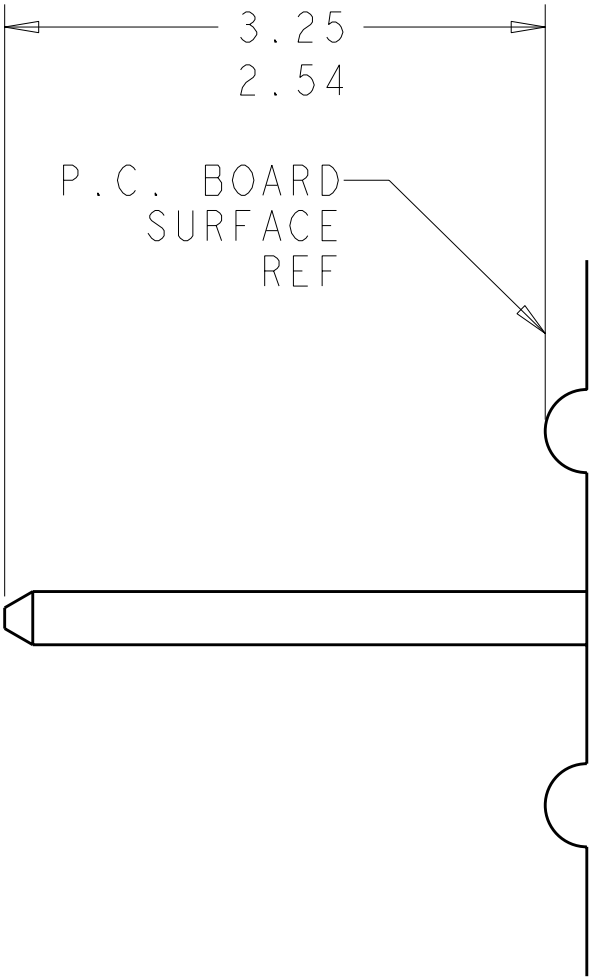

6. SOLDER PIN DETAIL
SCALE 10 : 1

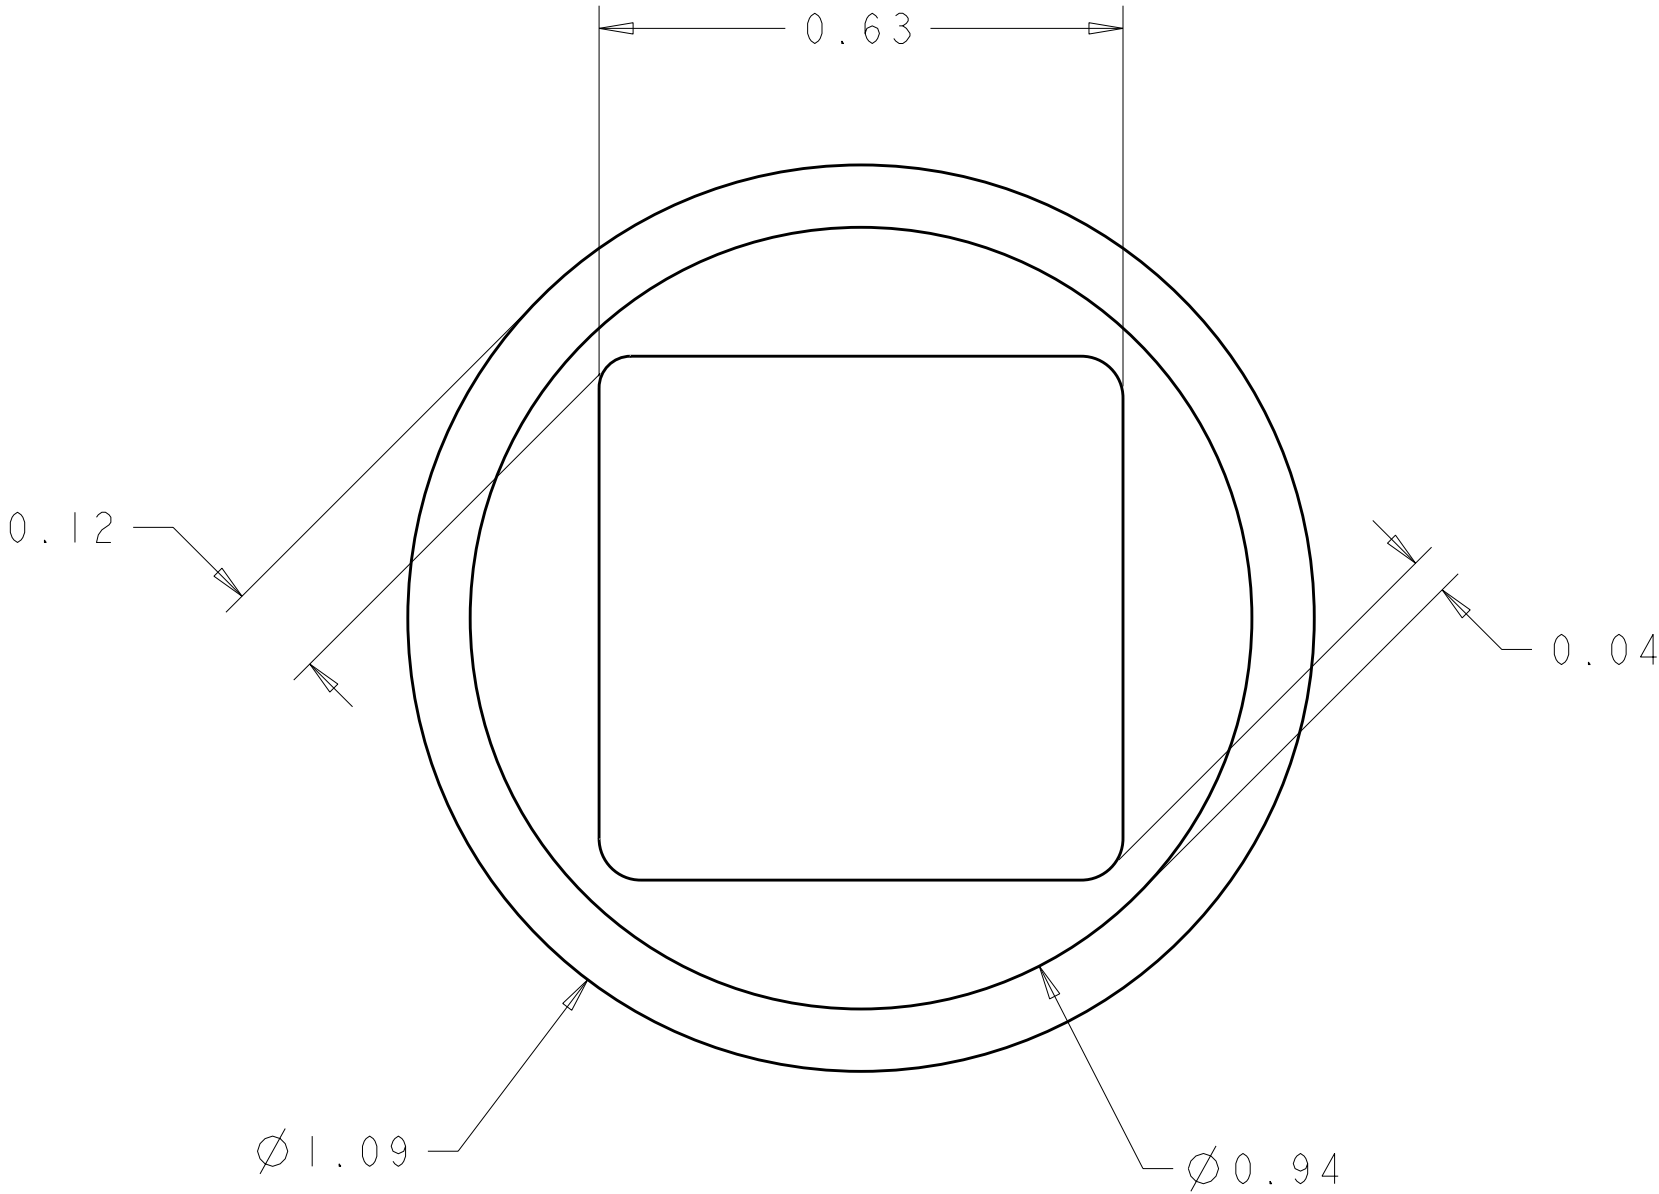

7. SOLDER TERMINATION AREA
SCALE 40:1
RECOMMENDED PRINTED CIRCUIT SOLDER HOLE
FINISHED HOLE: Ø1.02 ±.008
DRILLED HOLE: Ø1.15 ±.013
COPPER PLATE: .025 MIN
TIN PLATE: .008 MIN. (PER SURFACE)

ELCON FLATPAQ

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN R. GRZYBOWSKI 10JULY09	tyco Electronics Tyco Electronics Harrisburg, PA 17105-3608			
DIMENSIONS: mm		CHK M. SYKES 10JULY09	NAME STRAIGHT SOCKET CONNECTOR, SOLDER TAILS FLATPAQ			
		APVD M. PERCHERKE 10JULY09				
		PRODUCT SPEC -				
MATERIAL -		APPLICATION SPEC -	SIZE A200779	CAGE CODE C-2085266	DRAWING NO -	RESTRICTED TO -
		WEIGHT -	CUSTOMER DRAWING		SCALE 3:1	SHEET 3 OF 3
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±0.5 2 PLC ±0.25 3 PLC ±. 4 PLC ±. ANGLES ±.5 FINISH						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2085266-1](#)