


These drawings and specifications are the property of Microdot Inc., are issued in strict confidence and shall not be divulged, be reproduced or copied, or used as the basis for the manufacture or sale of any article without written permission of Microdot Inc.

CABLE ACCEPTANCE DIMS.
JACKET DIA.088 MAX.
SHIELD061 DIA MAX.
DIELECTRIC DIA. .050 MAX.
CENTER CONDUCT. DIA. .013 MAX.

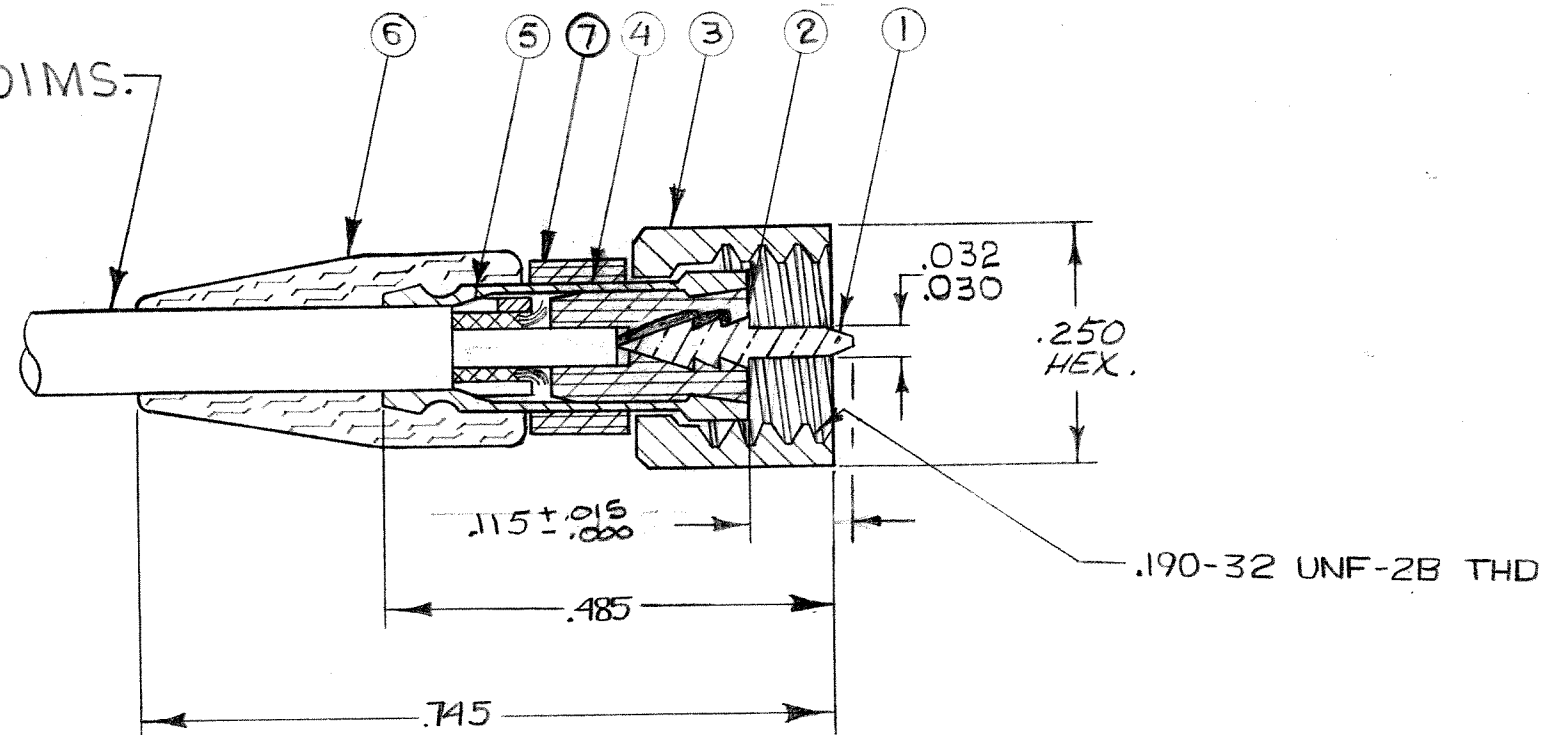

Tyco Dwg 9-1532140-4
Micro P/N 032-0097-0001

1	003-0597-0001	PIN PROTECTOR	TEFLON PER ASTM D1710		⑦
1	003-0270-0000	B.R.CAP	SILICONE RUBBER ZZ-R-765		⑥
1	003-0163-0001	RING	BRASS PER QQ-B-626	△	⑤
1	003-0160-0001	FERRULE	BRASS PER QQ-B-626	△	④
1	003-0454-0001	NUT	BRASS PER QQ-B-626	△	③
1	003-0027-0001	BUSHING	TEFLON PER ASTM D1710		②
1	003-0359-0002	PIN	COPPER ALLOY	△	①
QTY.	PART NO.	NOMENCLATURE	MATERIALS & SPEC.	FIN.	ITEM

△ GOLD PLATE PER MIL-G-45204, TYPE II, CLASS I.
△ SILVER PLATE .0002-.0004 PER QQ-S-365, TYPE II GRADE A.
3. MALCO ASSY. TOOL 010-0003-0000 REQ'D.
2. FOR ASSY. INSTRUCTIONS SEE RF-ASMB-88
1. THIS CONNECTOR MATES WITH ALL S-50 JACKS AND RECEPTACLES AS LISTED IN MALCO CATALOG.
NOTES: UNLESS OTHERWISE SPECIFIED

						STANDARD TOLERANCES UNLESS OTHERWISE SPECIFIED DEC. ± .010 FRAC. ± 1/32 ANGLES ± ECCENTRICITY MAX. T.I.R. HOLE DIA. ± SURFACE ROUGHNESS MICRO INCHES ✓ THREADS TO MIL-S-7742 COMMERCIAL TOLERANCES APPLY TO STOCK DIMENSIONS		MALCO A MICRODOT COMPANY, INC. 220 PASADENA AVE., SO. PASADENA, CALIF. 91030	
						SURFACE TREATMENT NOTED		MATERIAL NOTED	
						APP <i>W. J.</i>		DRAWN BY <i>M. J. M.</i>	
						CHECKED BY		SCALE <i>CS</i> WT DATE <i>1-5-61</i>	
						PROD CODE <i>931</i>		DRAWING NUMBER <i>032-0097-0001 H</i>	
						CODE <i>CDM</i>			

ASSEMBLY	NO REQ'D	LET	ECO	REVISION DESCRIPTION	BY	DATE	APP

PLUG

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[9-1532140-4](#)