


# XS2M08PC410D

inductive sensor XS2 M8 - L61mm - stainless - Sn2.5mm - 12..24VDC - M12



Product availability: Non-Stock - Not normally stocked in distribution facility

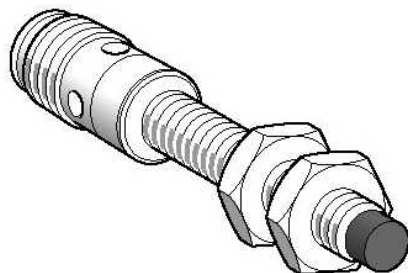

## Main

|                                    |  |
|------------------------------------|--|
| Commercial Status                  | Commercialised                                       |
| Range of product                   | OsiSense XS  |
| Series name                        | General purpose                                      |
| Sensor type                        | Inductive proximity sensor                           |
| Product specific application       | -  |
| Sensor name                        | XS2  |
| Sensor design                      | Cylindrical M8                                       |
| Size                               | 61 mm  |
| Body type                          | Fixed  |
| Detector flush mounting acceptance | Non flush mountable                                  |
| Material                           | Stainless steel                                      |
| Type of output signal              | Discrete   |
| Wiring technique                   | 4-wire   |
| [Sn] nominal sensing distance      | 0.1 in (2.5 mm)                                      |
| Discrete output function           | 1 NO + 1 NC  |
| Output circuit type                | DC   |
| Discrete output type               | PNP  |
| Electrical connection              | 4 pins M12 male connector                            |
| [Us] rated supply voltage          | 12...24 V DC with reverse polarity protection        |
| Switching capacity in mA           | <= 200 mA with overload and short-circuit protection |
| IP degree of protection            | IP67 conforming to IEC 60529                         |

## Complementary

|                       |                               |
|-----------------------|-------------------------------|
| ISO thread            | M8 x 1                        |
| Detection face        | Frontal                       |
| Front material        | PPS                           |
| Enclosure material    | Stainless steel 303           |
| Operating zone        | 0...0.08 in (0...2 mm)        |
| Differential travel   | 1...15% of Sr                 |
| Status LED            | 1 LED yellow for output state |
| Supply voltage limits | 10...36 V DC                  |
| Switching frequency   | <= 5000 Hz                    |
| Voltage drop          | <= 2 V at closed state        |
| Current consumption   | 0...10 mA at no-load          |
| Delay first up        | <= 5 ms                       |
| Delay response        | <= 0.1 ms                     |
| Delay recovery        | <= 0.1 ms                     |
| Marking               | CE                            |
| Threaded length       | 1.42 in (36 mm)               |
| Height                | 0.71 in (18 mm)               |

|                |                        |
|----------------|------------------------|
| Length         | 2.4 in (61 mm)         |
| Product weight | 0.06 lb(US) (0.025 kg) |

## Environment

|                                       |   |
|---------------------------------------|---|
| Product certifications                | CSA<br>UL   |
| Ambient air temperature for operation | -13...158 °F (-25...70 °C)  |
| Ambient air temperature for storage   | -40...185 °F (-40...85 °C)  |
| Vibration resistance                  | 25 gn amplitude = +/- 2 mm (f = 10...55 Hz) conforming to IEC 60068-2-6 |
| Shock resistance                      | 50 gn for 11 ms conforming to IEC 60068-2-27                            |

## Ordering and shipping details

|                       |   |
|-----------------------|---|
| Category              | 22486 - SENSORS, PROXIMITY                                |
| Discount Schedule     | DS2   |
| GTIN                  | 00785901547464  |
| Nbr. of units in pkg. | 1   |
| Package weight(Lbs)   | 0.10  |
| Product availability  | Non-Stock - Not normally stocked in distribution facility |
| Returnability         | N   |
| Country of origin     | FR  |

## Offer Sustainability

|                                  |   |
|----------------------------------|---|
| Sustainable offer status         | Green Premium product   |
| RoHS                             | Compliant - since 1010 - <a href="#">Schneider Electric declaration of conformity</a> |
| REACH                            | Reference not containing SVHC above the threshold                                     |
| Product environmental profile    | Available <a href="#">Download Product Environmental</a>                              |
| Product end of life instructions | Available <a href="#">Download End Of Life Manual</a>                                 |

## Contractual warranty

|        |           |
|--------|-----------|
| Period | 18 months |
|--------|-----------|

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schneider Electric:](#)

[XS2M08PC410D](#)