

THIS DRAWING IS UNPUBLISHED

RELEASED FOR PUBLICATION

© COPYRIGHT - By -

By -

ALL RIGHTS RESERVED

REVISIONS

P	LIR
---	-----

--	--

DESCRIPTION

DATE _____

DWN	AP
-----	----

YD

	C
--	---

REVIS



PER EC

-16-006303

08AUG2014

NK	M
----	---


M

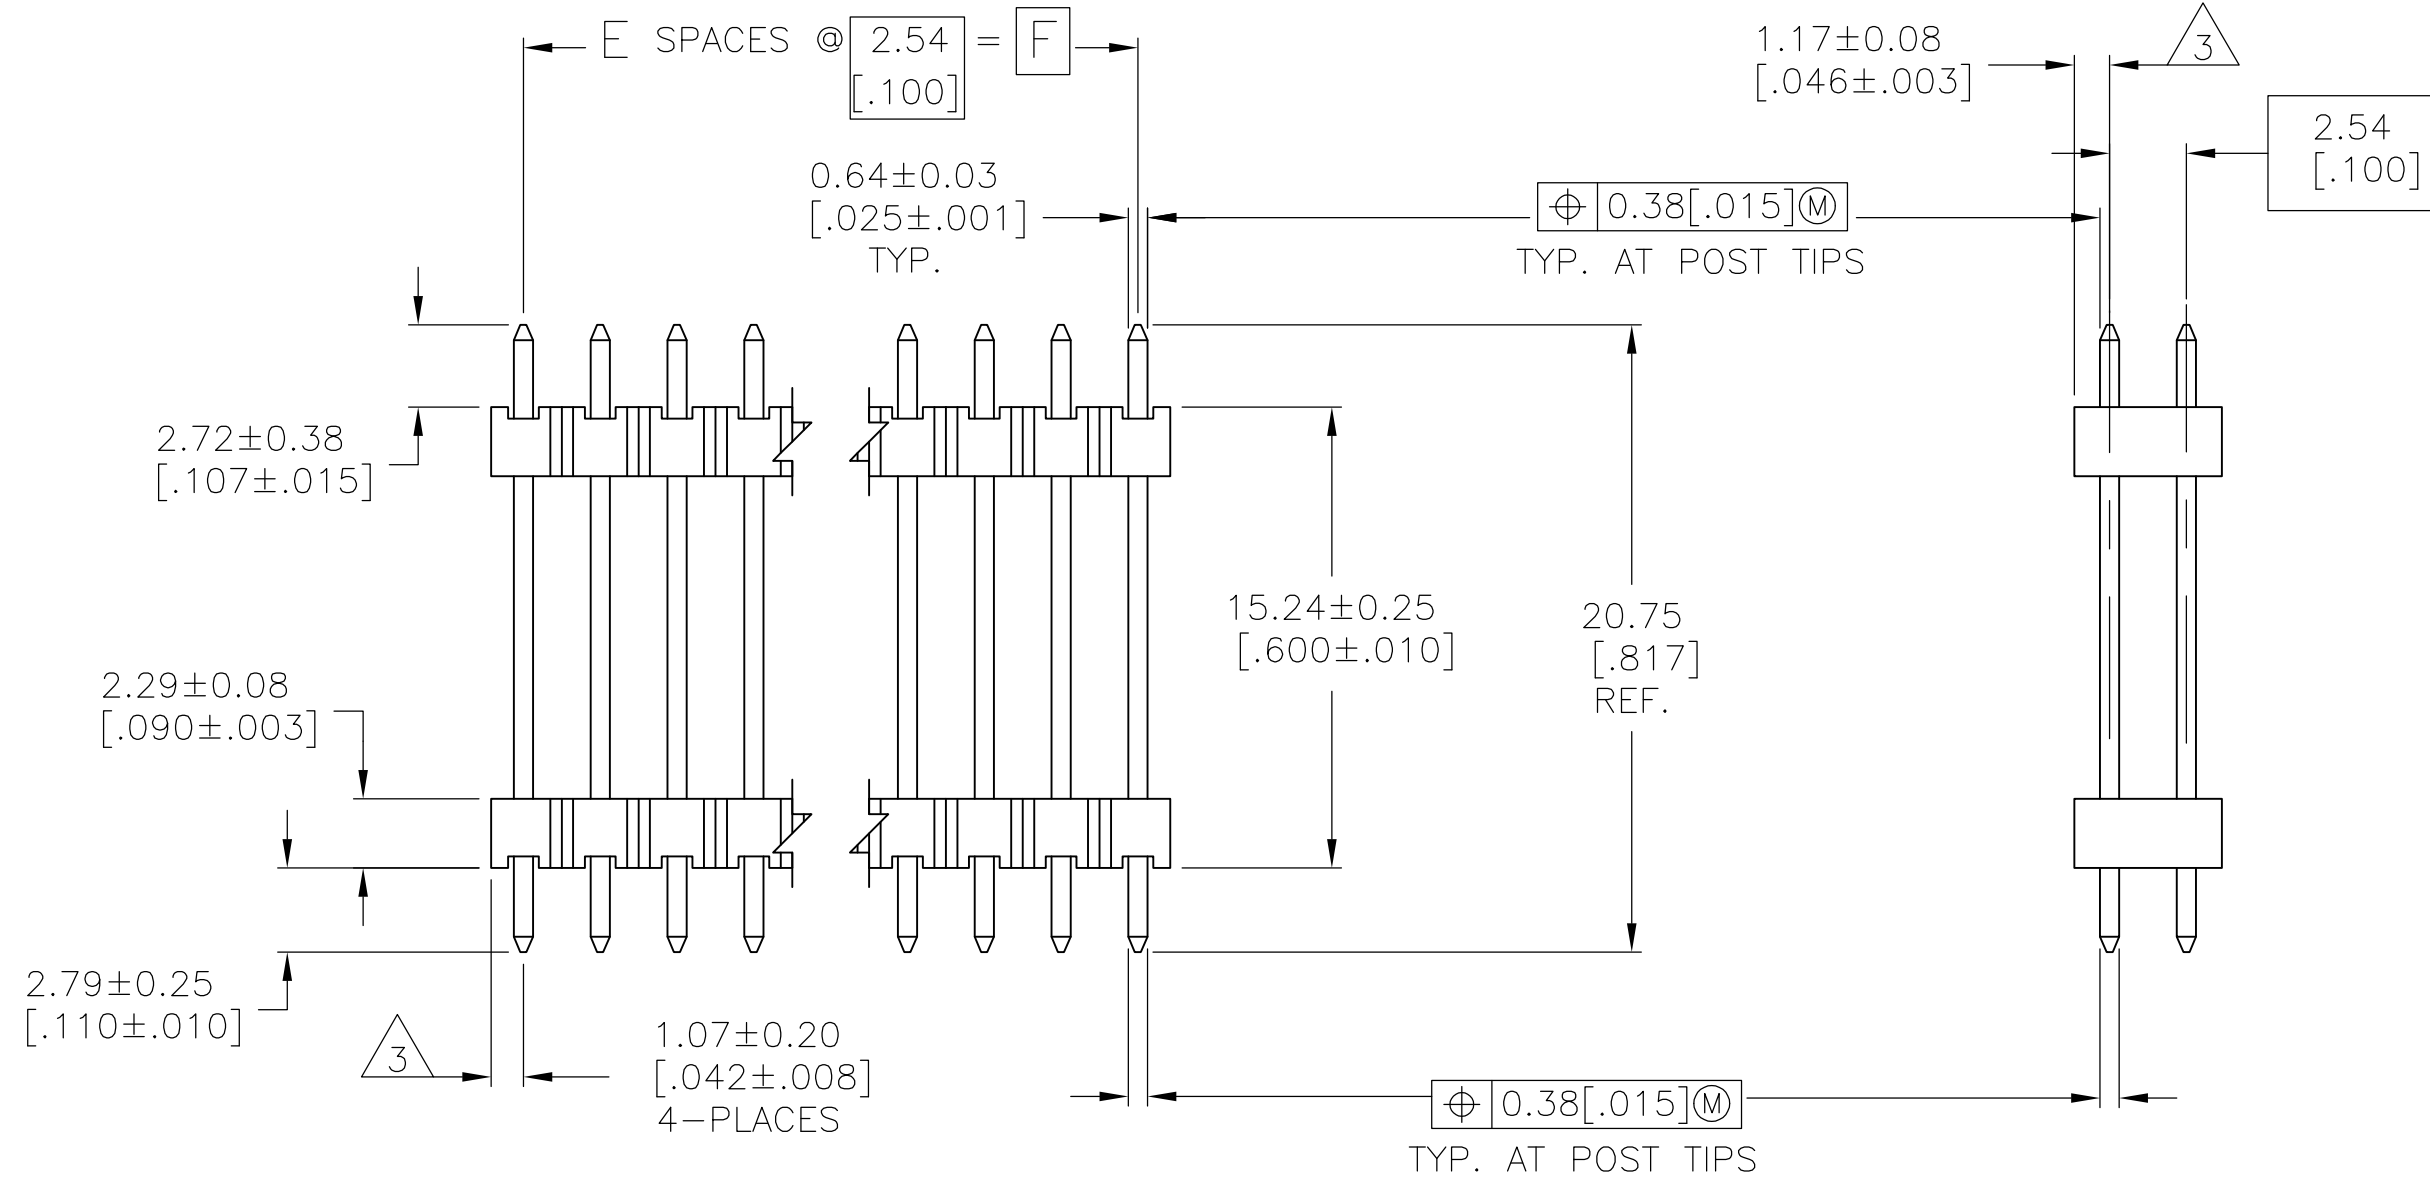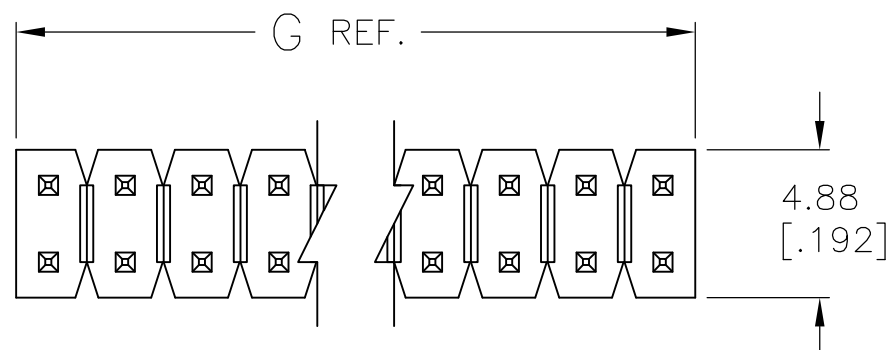

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
CONTACT: COPPER ALLOY
5. FINISH: 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD
OVER 0.00127 [.000050] NICKEL ENTIRE POST.
6. FINISH: 0.00254-0.00508 [.000100-.000200] MATTE TIN
OVER 0.00127 [.000050] NICKEL ENTIRE POST.

OBSOLETE		101.19 [3.984]	99.06 [3.900]	39	80	—9—146491—0—	
		98.65 [3.884]	96.52 [3.800]	38	78	—8—146491—9—	
		96.11 [3.784]	93.98 [3.700]	37	76	—8—146491—8—	
		93.57 [3.684]	91.44 [3.600]	36	74	—8—146491—7—	
		91.03 [3.584]	88.90 [3.500]	35	72	—8—146491—6—	
		88.49 [3.484]	86.36 [3.400]	34	70	—8—146491—5—	
		85.95 [3.384]	83.82 [3.300]	33	68	—8—146491—4—	
		83.41 [3.284]	81.28 [3.200]	32	66	—8—146491—3—	
		80.87 [3.184]	78.74 [3.100]	31	64	—8—146491—2—	
		78.33 [3.084]	76.20 [3.000]	30	62	—8—146491—1—	
		75.79 [2.984]	73.66 [2.900]	29	60	—8—146491—0—	
		73.25 [2.884]	71.12 [2.800]	28	58	—7—146491—9—	
		70.71 [2.784]	68.58 [2.700]	27	56	—7—146491—8—	
		68.17 [2.684]	66.04 [2.600]	26	54	—7—146491—7—	
		65.63 [2.584]	63.50 [2.500]	25	52	—7—146491—6—	
		63.09 [2.484]	60.96 [2.400]	24	50	—7—146491—5—	
		60.55 [2.384]	58.42 [2.300]	23	48	—7—146491—4—	
		58.01 [2.284]	55.88 [2.200]	22	46	—7—146491—3—	
		55.47 [2.184]	53.34 [2.100]	21	44	—7—146491—2—	
		52.93 [2.084]	50.80 [2.000]	20	42	—7—146491—1—	
		50.39 [1.984]	48.26 [1.900]	19	40	—7—146491—0—	
		47.85 [1.884]	45.72 [1.800]	18	38	—6—146491—9—	
		45.31 [1.784]	43.18 [1.700]	17	36	—6—146491—8—	
		42.77 [1.684]	40.64 [1.600]	16	34	—6—146491—7—	
		40.23 [1.584]	38.10 [1.500]	15	32	—6—146491—6—	
	OBSOLETE		37.69 [1.484]	35.56 [1.400]	14	30	6—146491—5—
		35.15 [1.384]	33.02 [1.300]	13	28	—6—146491—4—	
		32.61 [1.284]	30.48 [1.200]	12	26	—6—146491—3—	
		30.07 [1.184]	27.94 [1.100]	11	24	—6—146491—2—	
		27.53 [1.084]	25.40 [1.000]	10	22	—6—146491—1—	
		24.99 [.984]	22.86 [.900]	9	20	—6—146491—0—	
		22.45 [.884]	20.32 [.800]	8	18	—5—146491—9—	
		19.91 [.784]	17.78 [.700]	7	16	—5—146491—8—	
		17.37 [.684]	15.24 [.600]	6	14	—5—146491—7—	
		14.83 [.584]	12.70 [.500]	5	12	—5—146491—6—	
		12.29 [.484]	10.16 [.400]	4	10	—5—146491—5—	
		9.75 [.384]	7.62 [.300]	3	8	—5—146491—4—	
		7.21 [.284]	5.08 [.200]	2	6	—5—146491—3—	
		4.67 [.184]	2.54 [.100]	1	4	—5—146491—2—	
		2.13 [.084]	— —	—	2	—5—146491—1—	
		PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

OBSOLETE		101.19 [3.984]	99.06 [3.900]	39	80	4-146491-0-
		98.65 [3.884]	96.52 [3.800]	38	78	3-146491-9-
		96.11 [3.784]	93.98 [3.700]	37	76	3-146491-8-
		93.57 [3.684]	91.44 [3.600]	36	74	3-146491-7-
		91.03 [3.584]	88.90 [3.500]	35	72	3-146491-6-
		88.49 [3.484]	86.36 [3.400]	34	70	3-146491-5-
		85.95 [3.384]	83.82 [3.300]	33	68	3-146491-4-
		83.41 [3.284]	81.28 [3.200]	32	66	3-146491-3-
		80.87 [3.184]	78.74 [3.100]	31	64	3-146491-2-
		78.33 [3.084]	76.20 [3.000]	30	62	3-146491-1-
		75.79 [2.984]	73.66 [2.900]	29	60	3-146491-0-
		73.25 [2.884]	71.12 [2.800]	28	58	2-146491-9-
		70.71 [2.784]	68.58 [2.700]	27	56	2-146491-8-
		68.17 [2.684]	66.04 [2.600]	26	54	2-146491-7-
		65.63 [2.584]	63.50 [2.500]	25	52	2-146491-6-
		63.09 [2.484]	60.96 [2.400]	24	50	2-146491-5-
		60.55 [2.384]	58.42 [2.300]	23	48	2-146491-4-
		58.01 [2.284]	55.88 [2.200]	22	46	2-146491-3-
		55.47 [2.184]	53.34 [2.100]	21	44	2-146491-2-
		52.93 [2.084]	50.80 [2.000]	20	42	2-146491-1-
		50.39 [1.984]	48.26 [1.900]	19	40	2-146491-0-
		47.85 [1.884]	45.72 [1.800]	18	38	1-146491-9-
		45.31 [1.784]	43.18 [1.700]	17	36	1-146491-8-
		42.77 [1.684]	40.64 [1.600]	16	34	1-146491-7-
		40.23 [1.584]	38.10 [1.500]	15	32	1-146491-6-
		37.69 [1.484]	35.56 [1.400]	14	30	1-146491-5-
		35.15 [1.384]	33.02 [1.300]	13	28	1-146491-4-
		32.61 [1.284]	30.48 [1.200]	12	26	1-146491-3-
		30.07 [1.184]	27.94 [1.100]	11	24	1-146491-2-
		27.53 [1.084]	25.40 [1.000]	10	22	1-146491-1-
		24.99 [.984]	22.86 [.900]	9	20	1-146491-0-
		22.45 [.884]	20.32 [.800]	8	18	146491-9-
		19.91 [.784]	17.78 [.700]	7	16	146491-8-
		17.37 [.684]	15.24 [.600]	6	14	146491-7-
		14.83 [.584]	12.70 [.500]	5	12	146491-6-
		12.29 [.484]	10.16 [.400]	4	10	146491-5-
	9.75 [.384]	7.62 [.300]	3	8	146491-4-	
	7.21 [.284]	5.08 [.200]	2	6	146491-3-	
	4.67 [.184]	2.54 [.100]	1	4	146491-2-	
	2.13 [.084]	- -	-	2	146491-1-	
	PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. 11/8/90 CHK. J. HOFFMAN G. DUBNICZKI APVD. G. DUBNICZKI 11/22/95		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 0.51[.02] 3 PLC ± 0.127[.005] 4 PLC ± 0.0127[.0005] FINISH: ±		NAME: HEADER ASSEMBLY, MOD II, STACKING, DOUBLE ROW, .025 SO. POST, UNSHROUDED	
		PRODUCT SPEC APPLICATION SPEC		SIZE: CAGE CODE: DRAWING NO: A1 00779 C 146491	
MATERIAL: 		WEIGHT: — SEE TABLE		RESTRICTED TO: —	
CUSTOMER DRAWING					
		SCALE: 4:1		SHEET 1 OF 1 REV C	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-146491-7](#)