

A-A

二重ロック時 DOUBLE LOCKED

А

LOC	 								
	DIST	REVISIONS 変更							
U	-	Р	LTR		DESCRIPTION	DATE	DWN	APVD	
		\square	A3	REVISED	ECR-13-002015	11MAR2013	TS	КВ	


D


С

17

В

А

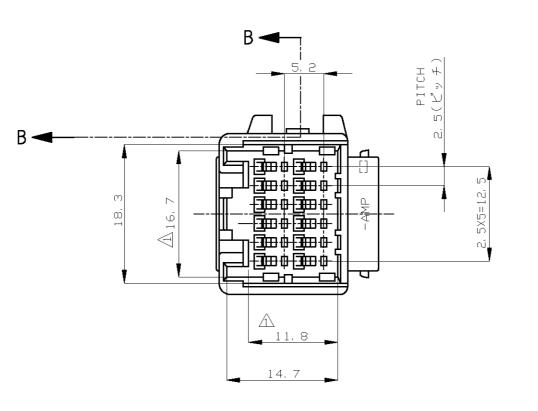





- 1. TO BE MEASURED WITHIN 2mm FROM -Z-2. APPLICABLE TERMINAL NO. 173682 3. THE MATING PLUG HOUSING NUMBER: 174045

- ▲ -Z- 面から2mmの範囲で測定
 2. 適用端子型番: 173682
 3. 嵌合相手ハウジング型番; 174045

							青(BLUE)		1740	058-5	1
							緑(GREEN))	1740	058-4	
							黒(BLACK)	1740	058-2	
							色(COLOR))	製品型番	(PART NO.)
	THIS DRAWING IS A C	ONTROLLED DOCUMENT.	DWN M.SUGAWARA снк К.BETSUI	04AUGD6 04AUGD6	-	ł	. <i>TE</i>	te c	onnectivit	ty	. ,
TDLERANCE UNLESS HERWISE SPECIFIED: 一般公差		TDLERANCES UNLESS OTHERWISE SPECIFIED. 一般公差 0 PLC ± 1 PLC ± - 2 PLC ± - 3 PLC ± -	APVD K.BETSUI PRODUCT SPEC 製品規格 108-5352 APPLICATION SPEC	04AUGD6	NAME 名称		12POSITION CAP HOUSING SERIES MULTI-LOCK CONNECTOR				
<≤ 10 : ±0.2 <≤ 30 : ±0.25 <≤100 : ±0.3	MATERIAL 材料 PBT	4 PCC ± - ANGLES ± - FINISH 仕上 SEE TABLE	取付適用規格 WEIGHT		size A2		trawing no ∰5 C−174058			RESTRICTED TO)
; ±3°			CUSTOMER DRA	WING			SCALE 尺度 2:	1 SHEE	et 1 of 1	1 ^{REV} A3	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: 174058-4