

4

3


2

1

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
FT	0		0	RELEASED EC 0G3B-0834-04	22OCT2004	SW	CR


D

D

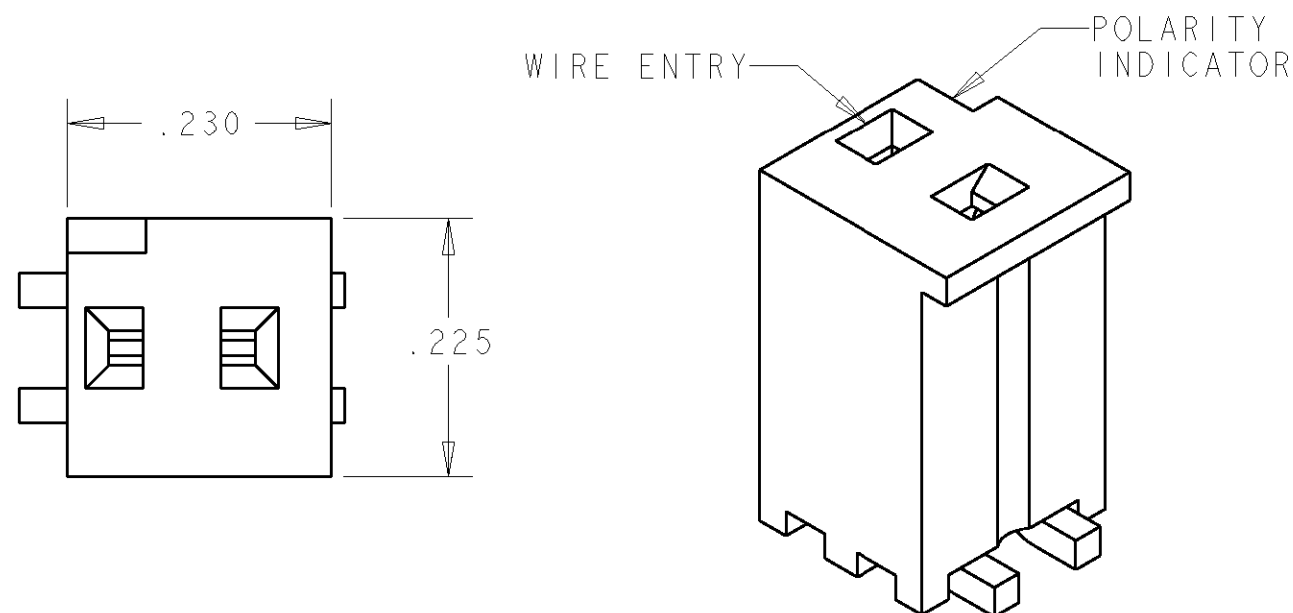


C

C

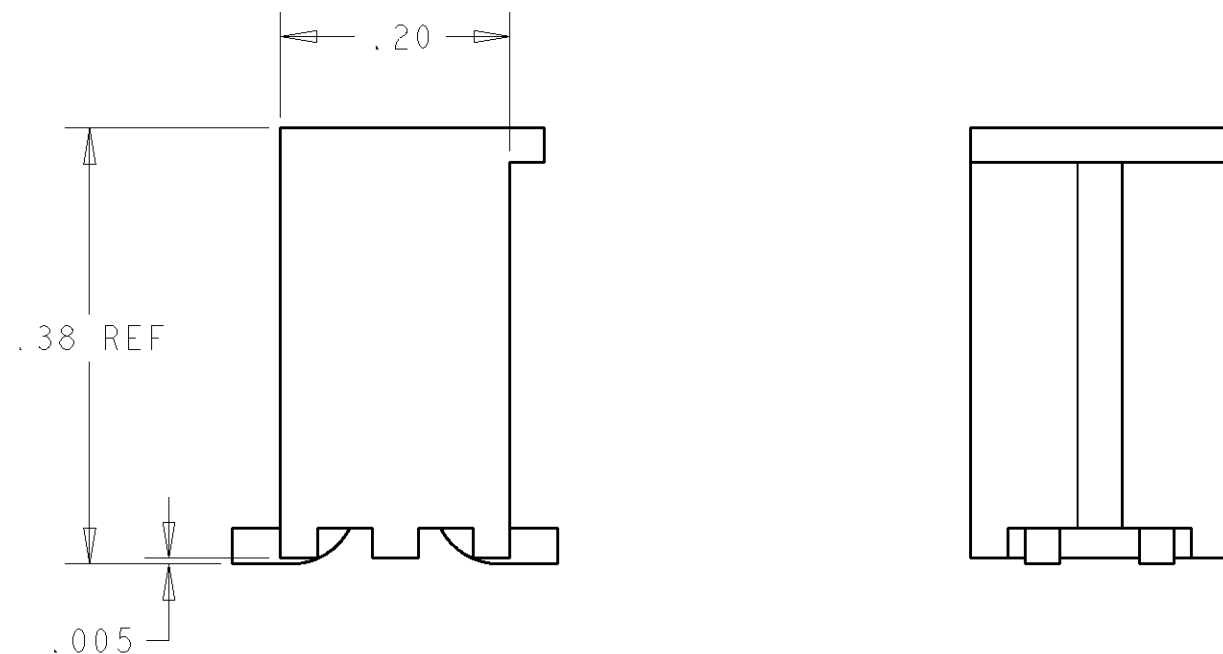

B

B

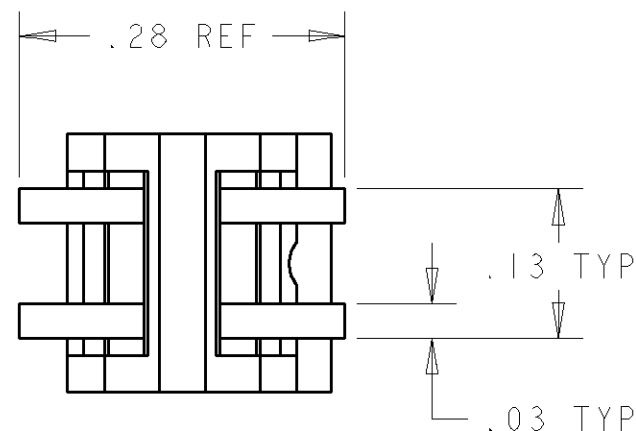

A

A

- MATERIALS:
HOUSING: THERMOPLASTIC, PPS. COLOR: BLACK.
CONTACT: PHOSPHOR BRONZE, TIN PLATED OVER NICKEL.
- MECHANICAL PERFORMANCE:
WIRE ACCOMMODATION: #24 AWG, TINNED
TOP COATED STRANDED.
STRIP LENGTH: 0.22 MIN - 0.28 MAX
MAX INSULATION DIA: 1.7MM
- ELECTRICAL PERFORMANCE:
VOLTAGE RATING: 250V
CURRENT RATING: 3A
DIELECTRIC STRENGTH: 1500 VAC

SMC2402	TAPE AND REEL IN LOTS OF 500 PIECES	1776226-1
CATALOG NUMBER	PACKAGE TYPE	PART NUMBER
DWN S. WELDON 22OCT2004	BUCHANAN Tyco Electronics Harrisburg, PA 17105-3608	
CHK C. RICHARD 22OCT2004		
APVD C. RICHARD 22OCT2004		
PRODUCT SPEC	NAME ASSEMBLY, SMC2402	
APPLICATION SPEC	-	
WEIGHT -	SIZE A3	CAGE CODE 00779
CUSTOMER DRAWING	DRAWING NO C-1776226	RESTRICTED TO -
SCALE 6:1		SHEET 1 OF 1
		REV 0

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.	
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ±-
	1 PLC ±0.1
	2 PLC ±0.01
	3 PLC ±0.005
	4 PLC ±0.0002
MATERIAL -	FINISH -

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1776226-1](#)