



LOC	DIST	REVISIONS				
AD	00	P	LTR	DESCRIPTION	DATE	DWN
			H	REVISED PER ECO-14-000068	23APR2014	APVD

- 1
- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2
- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 4
- POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

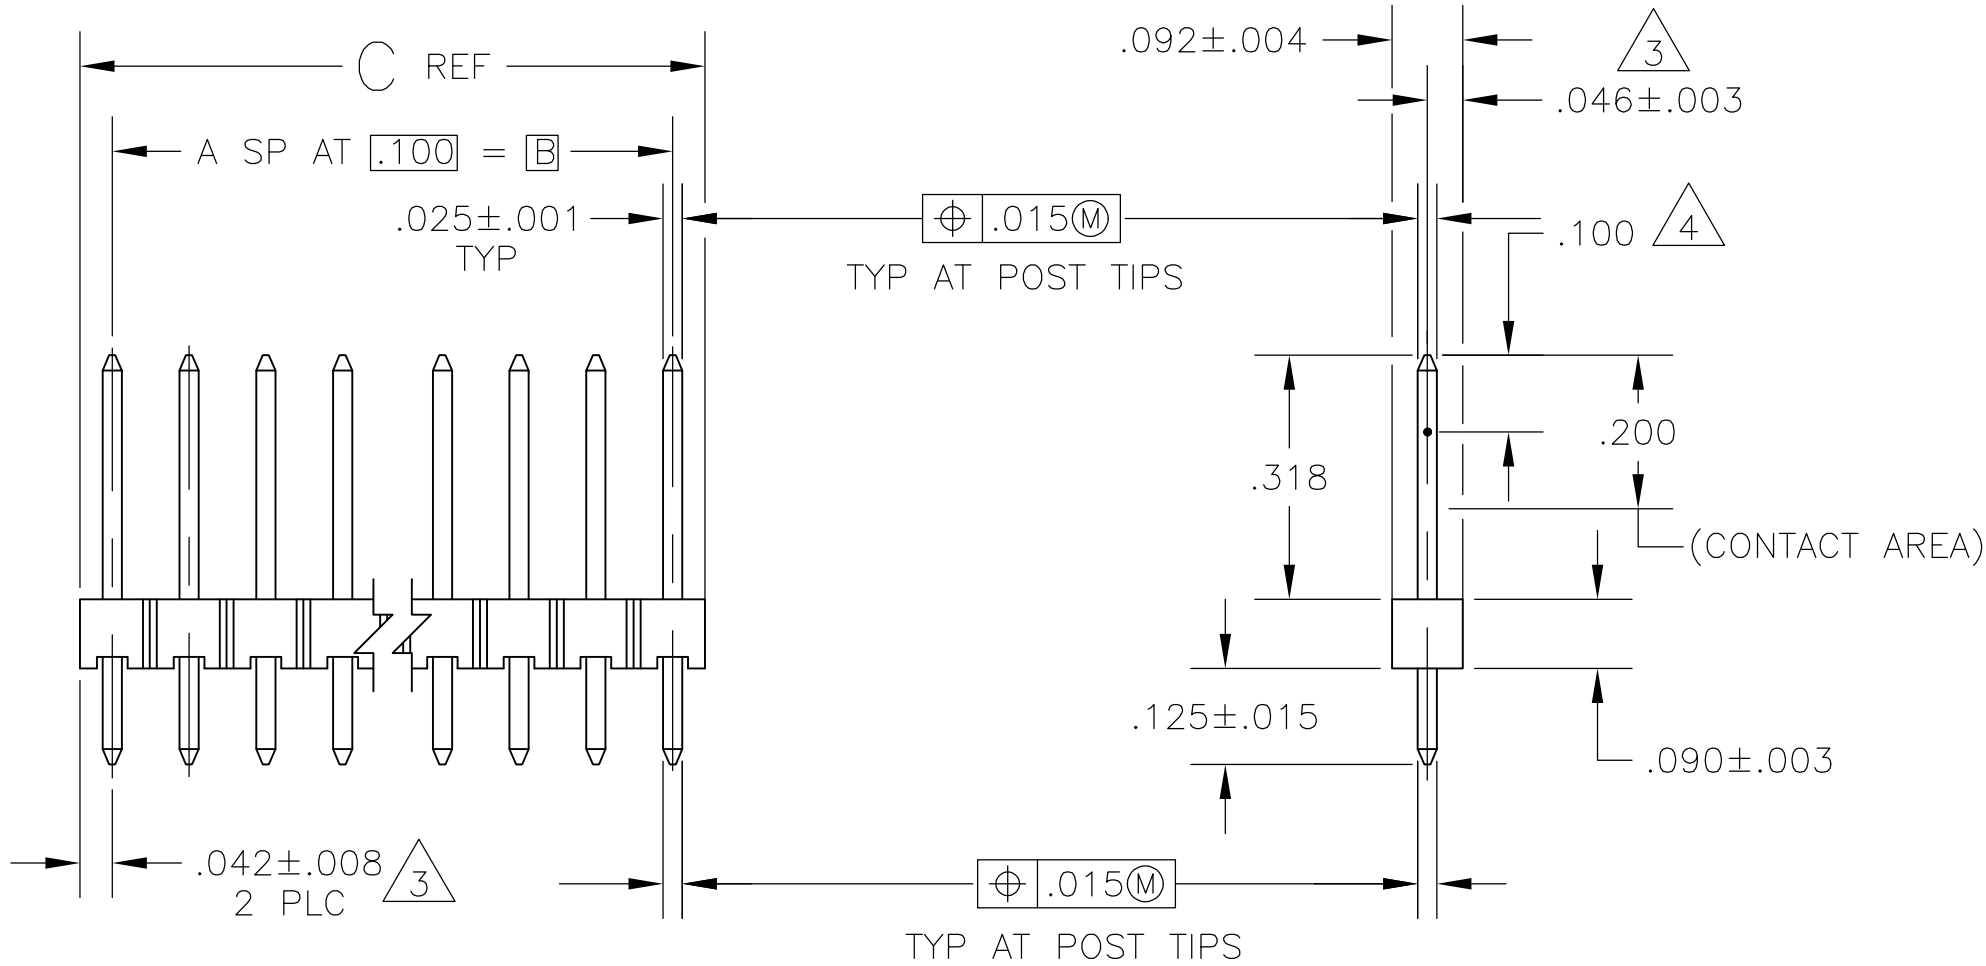

OBSOLETE	3.984	3.900	39	40	4-102976-0
	3.884	3.800	38	39	3-102976-9
	3.784	3.700	37	38	3-102976-8
	3.684	3.600	36	37	3-102976-7
	3.584	3.500	35	36	3-102976-6
	3.484	3.400	34	35	3-102976-5
	3.384	3.300	33	34	3-102976-4
	3.284	3.200	32	33	3-102976-3
	3.184	3.100	31	32	3-102976-2
	3.084	3.000	30	31	3-102976-1
	2.984	2.900	29	30	3-102976-0
	2.884	2.800	28	29	2-102976-9
	2.784	2.700	27	28	2-102976-8
	2.684	2.600	26	27	2-102976-7
	2.584	2.500	25	26	2-102976-6
	2.484	2.400	24	25	2-102976-5
	2.384	2.300	23	24	2-102976-4
	2.284	2.200	22	23	2-102976-3
	2.184	2.100	21	22	2-102976-2
	2.084	2.000	20	21	2-102976-1
OBSOLETE	1.984	1.900	19	20	2-102976-0
	1.884	1.800	18	19	1-102976-9
	1.784	1.700	17	18	1-102976-8
	1.684	1.600	16	17	1-102976-7
OBSOLETE	1.584	1.500	15	16	1-102976-6
	1.484	1.400	14	15	1-102976-5
	1.384	1.300	13	14	1-102976-4
	1.284	1.200	12	13	1-102976-3
SUPERSEDED BY 6-146277-2	1.184	1.100	11	12	1-102976-2
	1.084	1.000	10	11	1-102976-1
	.984	.900	9	10	1-102976-0
	.884	.800	8	9	102976-9
SUPERSEDED BY 5-146277-7	.784	.700	7	8	102976-8
	.684	.600	6	7	102976-7
	.584	.500	5	6	102976-6
	.484	.400	4	5	102976-5
	.384	.300	3	4	102976-4
	.284	.200	2	3	102976-3
	.184	.100	1	2	102976-2
	.084	—	—	1	102976-1
C		B	A	NO OF POSN	PART NUMBER

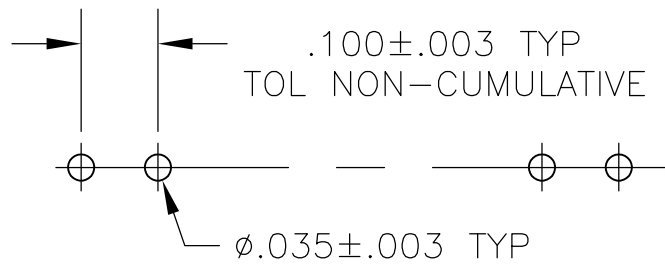

RECOMMENDED HOLE LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

H MOLL

09OCT87

CHK

T. CLARK

12OCT87

APVD

T. CLARK

13OCT87

DIMENSIONS:

INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± .005

4 PLC ± -

ANGLES ± -

MATERIAL

HOUSING:

FLAME RETARDANT THERMOPLASTIC

COLOR-BLACK

POSTS: COPPER ALLOY

FINISH

POSTS:

.000030 GOLD ON COCT AREA

.000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER

.000050 NICKEL

WEIGHT

-

CUSTOMER DRAWING

SCALE

4:1

SHEET

1 of 1

REV

H

TE Connectivity

NAME

HEADER ASSY, MOD II, BREAKAWAY, SINGLE ROW, .100 CL, VERTICAL, WITH .025 SQUARE POSTS

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A2

00779

C=102976

—

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[102976-8](#)