

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0940304031

Status:


Active

Overview:

Standard Quick-Disconnect Terminals

Description:

Quick Disconnect, Female, for (0.50-1.00mm²) 18-20 AWG Wire, Accepts 4.75 x 0.81mm Tab

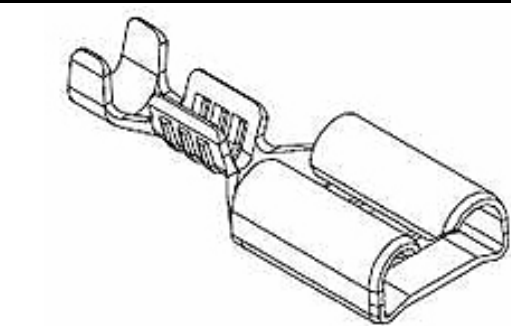

Series image - Reference only

Documents:

Drawing (PDF)

Product Specification PS-94030-001-001 (PDF)

Product Specification PS-94030-002-001 (PDF)

RoHS Certificate of Compliance (PDF)

General	
Product Family	Quick Disconnects
Series	94030
Crimp Quality Equipment	Yes
Insulated	No
Overview	Standard Quick-Disconnect Terminals
Product Name	N/A
Type	Quick Disconnect
UPC	800754325431
Physical	
Barrel Type	Open
Gender	Female
Glow-Wire Capable	No
Insulation	None
Lock to Mating Part	None
Material - Metal	Brass
Material - Plating Mating	Tin
Net Weight	0.418/g
Orientation	Straight
Packaging Type	Reel
Plating min - Mating	2.032µm
Polarized to Mating Part	Yes
Tab Thickness	0.81mm
Tab Width	4.75mm
Temperature Range - Operating	80°C
Wire Insulation Diameter	2.70-4.30mm
Wire Size AWG	14, 16
Wire Size mm²	1.00-2.50
Electrical	
Voltage - Maximum	250V
Solder Process Data	
Lead-freeProcess Capability	N/A
Material Info	
Reference - Drawing Numbers	
Product Specification	PS-94030-001-001, PS-94030-002-001
Sales Drawing	SD-94030-403

EU ELV

Compliant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - ED/61/2018 (27 June 2018)

Halogen-Free

Status

Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com

Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

ELV

Prop65

RoHS Phthalates

Green Image

Compliant

Compliant

Not Contained

Search Parts in this Series

94030 Series

Use With

94095-6030 , 94095-6040

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

94030-4031