
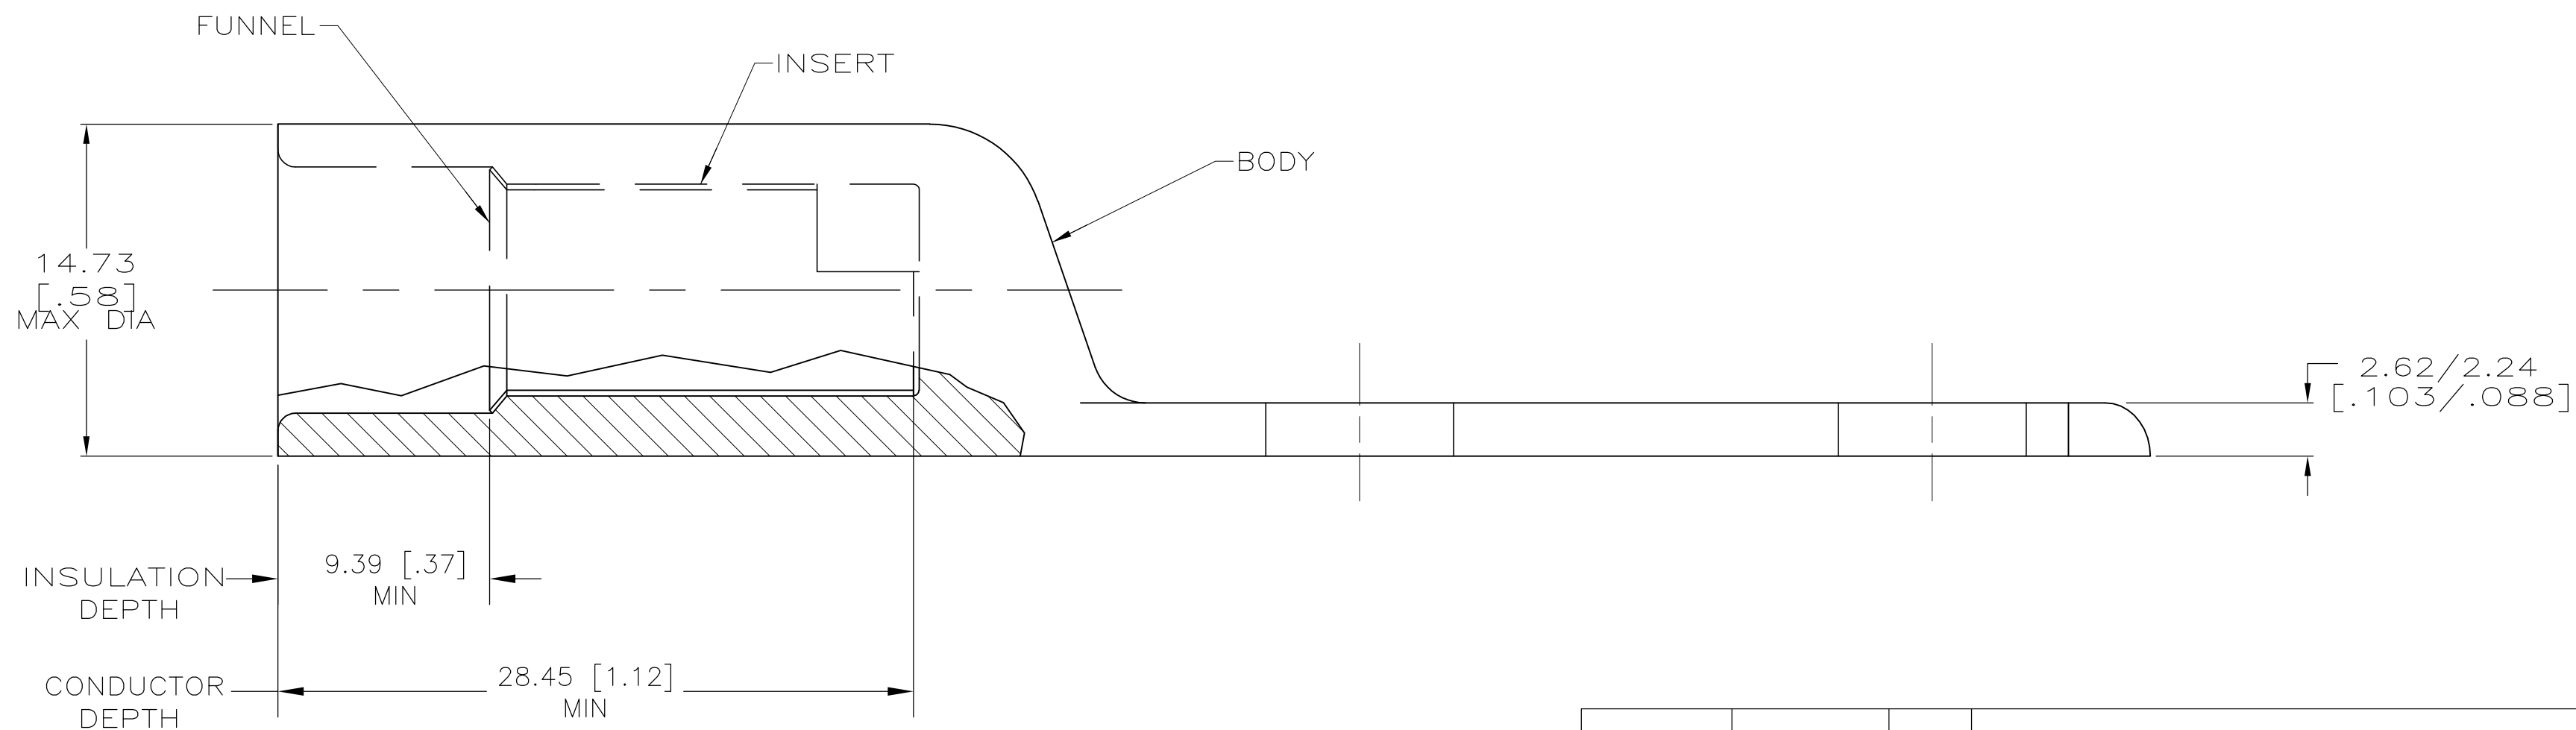


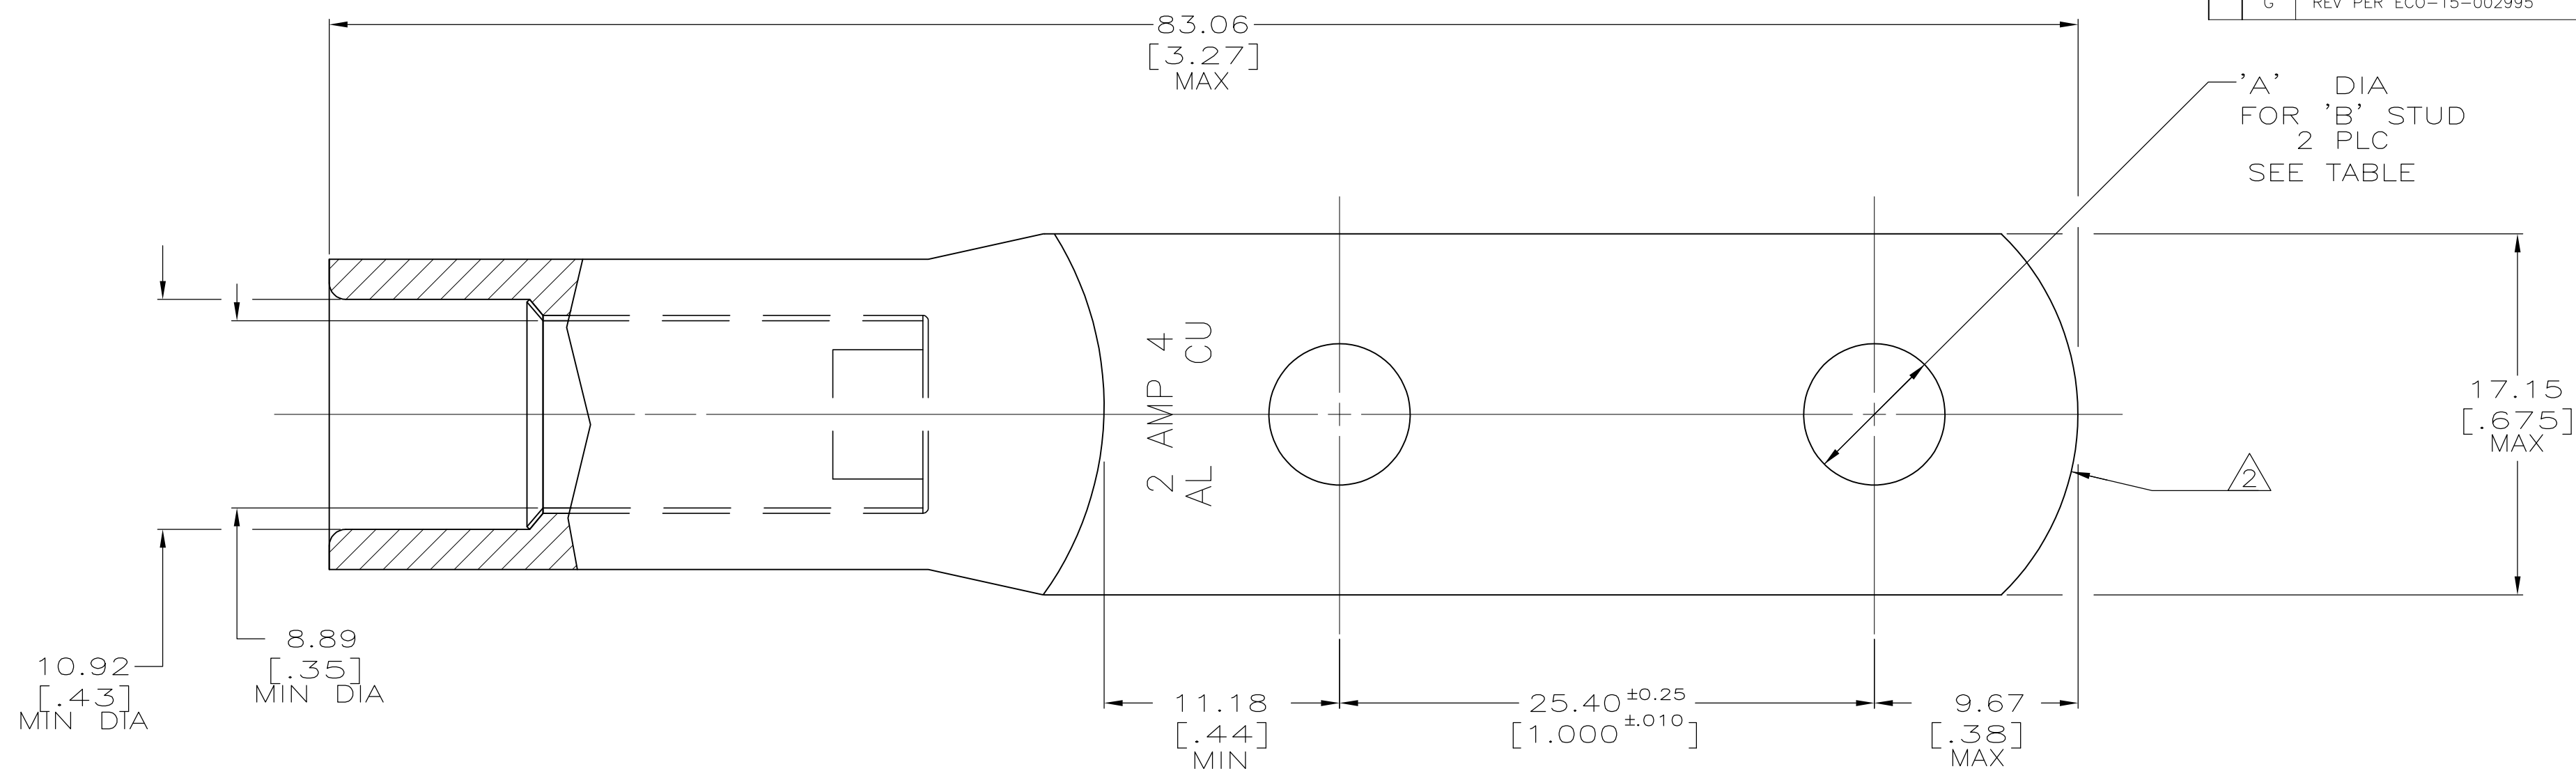

- 1 WIRE INSULATION: 8.64[.340] - 9.65[.380] DIA
-  THE TONGUE RADIUS FEATURE IS NOT A TOOLING
CONTROLLED DIMENSION AND MAY NOT BE A TRUE
RADIUS.

43 GRAMS	9.9 1 ^{±0.13} [.390 ^{±0.05}]	3/8	<u>BODY:</u> COPPER ASTM-B187 ANNEALED TIN PL MIL-T-10727 0.00457[.000150] MIN THK INSERT & FUNNEL: BRASS PER ASTM B36 NICKEL PLATE SAE AMS QQ-N-290A, DATED JULY 2000, 0.00254 [.000100] MIN THK	55835-2
44 GRAMS	6.73 ^{±0.13} [.265 ^{±0.05}]	1/4		55835-1
WEIGHT	"A"	"B"	MATERIAL AND FINISH	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 6/15/92 DK SCHRUM CHK 6/16/92 WJ VOCKROTH APVD 6/16/92 AJ KAUFMAN		 TE Connectivity				
DIMENSIONS: MM [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH		NAME WIRE TERMINAL, COPALUM SEALED, RING TONGUE, WIRE SIZE: 2 AL, 4 COPPER				
		PRODUCT SPEC 108-11011 APPLICATION SPEC 114-2134		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
MATERIAL		WEIGHT		A2	00779	C-55835	-	
SEE TABLE		SEE TABLE		CUSTOMER DRAWING		SCALE 4:1	SHEET 1 of 1	REV G

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[55835-1](#)