

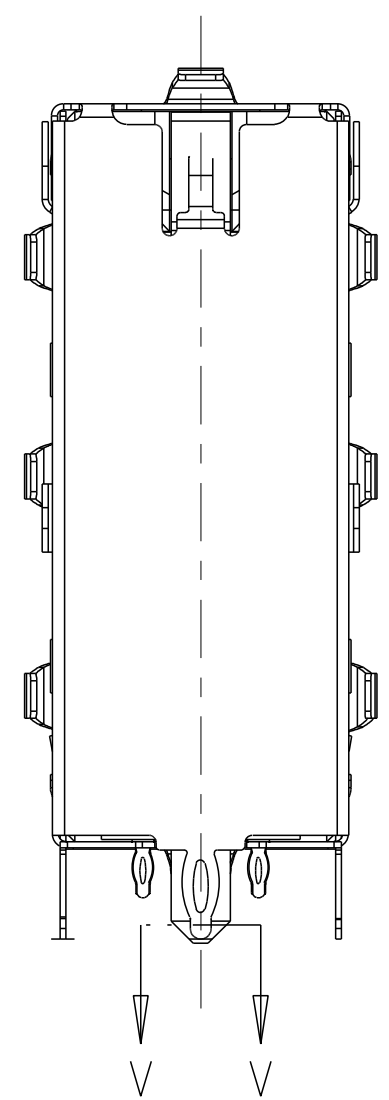
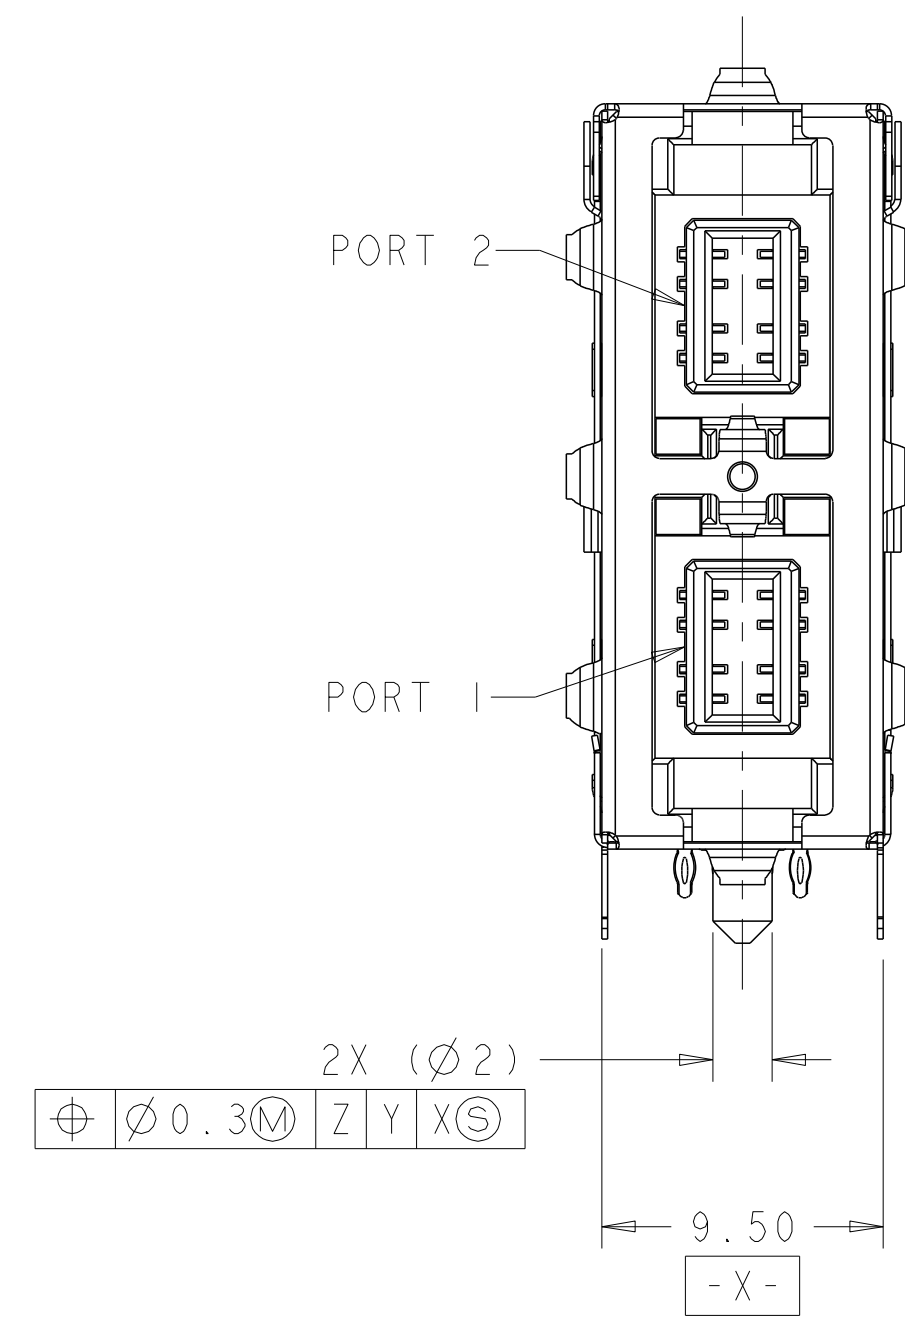
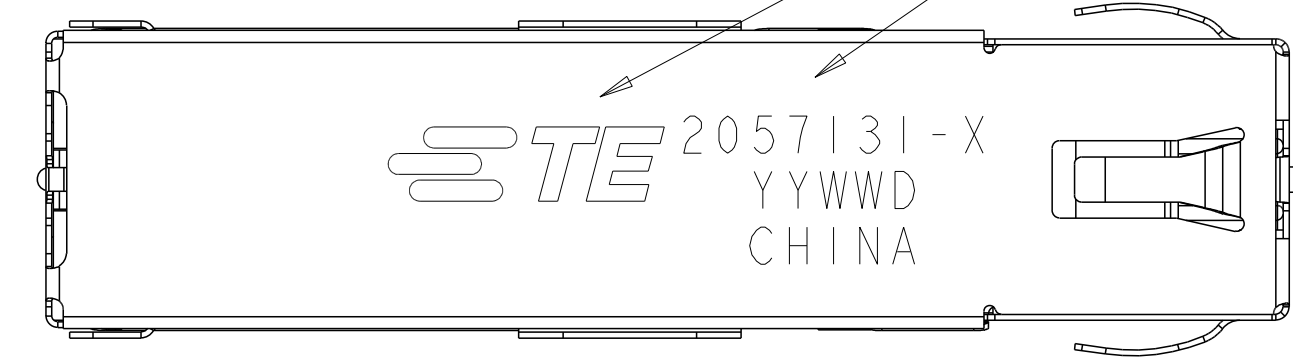



- △ TE LOGO, PART NUMBER, DATE CODE
AND COUNTRY OF ORIGIN, SHOWN APPROXIMATE AREA.
DATE CODE: YYWW WHERE "YY" IS YEAR, "WW" IS WEEK,
"D" IS DAY OF WEEK, WITH SUNDAY=1.

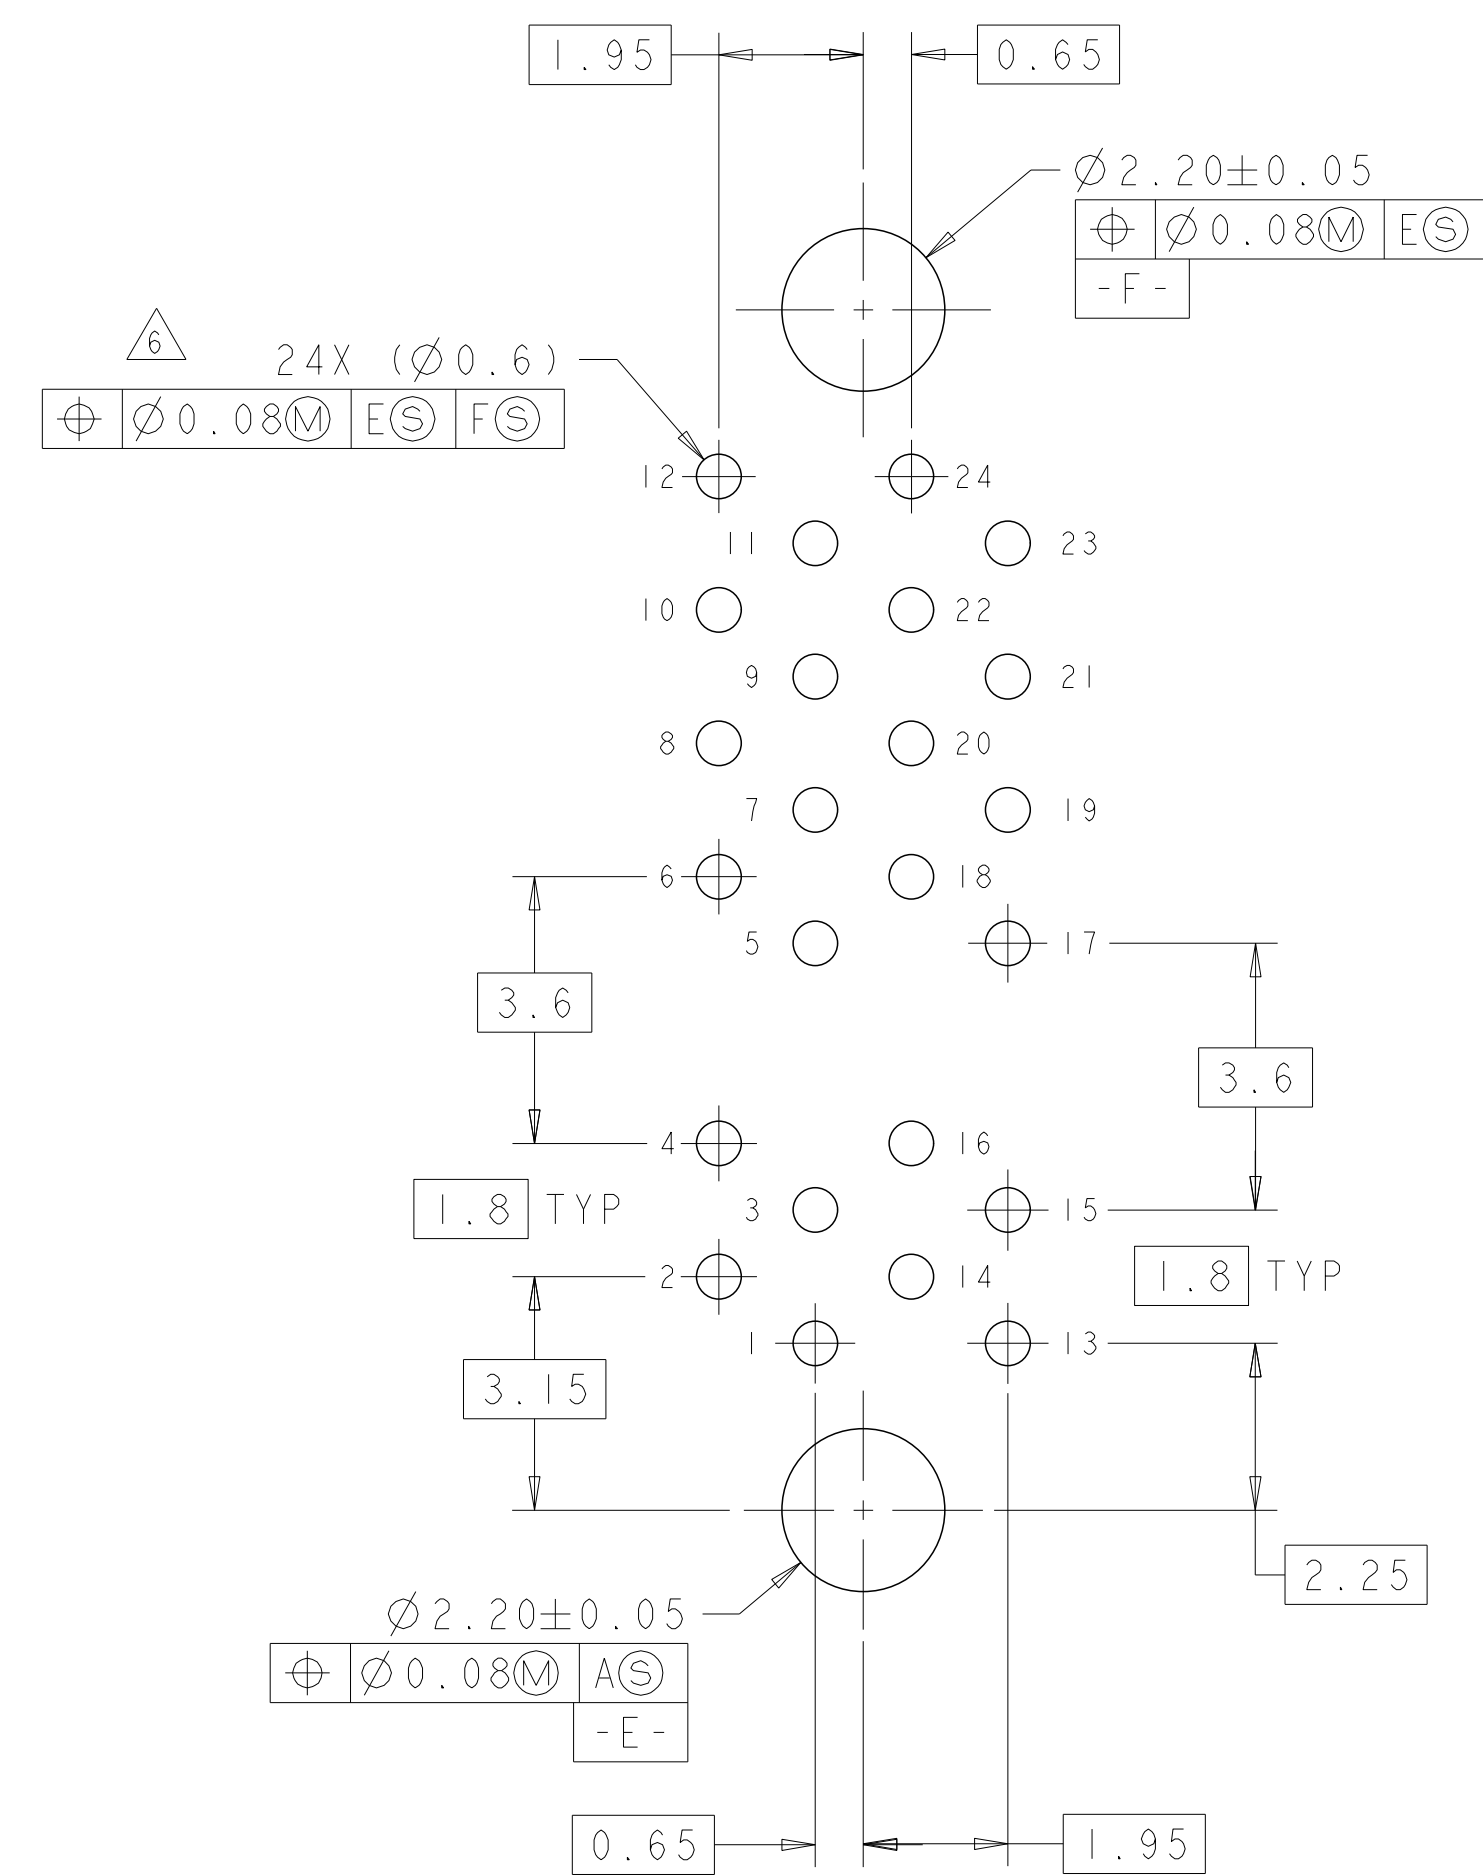


YELLOW/GREEN BI-COLOR	2057131-2
RED/GREEN BI-COLOR	2057131-1
LED COLORS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT .		DWN M. SHIRK 04APR2008		
		CWR R. HENRY 04APR2008	STE TE Connectivity	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME	
mm		APVD: R. HENRY 04APR2008	RECEPTACLE ASSEMBLY, 2X1, NON MAGNETICS, RJ POINT FIVE	
	0 PLC ±: 2 PLC ±: 3 PLC ±: 4 PLC ±: ANGLES ±°	PRODUCT SPEC	SIZE CAGE CODE DRAWING NO	
MATERIAL	FINISH	APPLICATION SPEC	A100779	RESTRICTED TO
-	-	WEIGHT	C=2057131	
		CUSTOMER DRAWING	SCALE 4:1	SHEET 1 OF 4 REV A

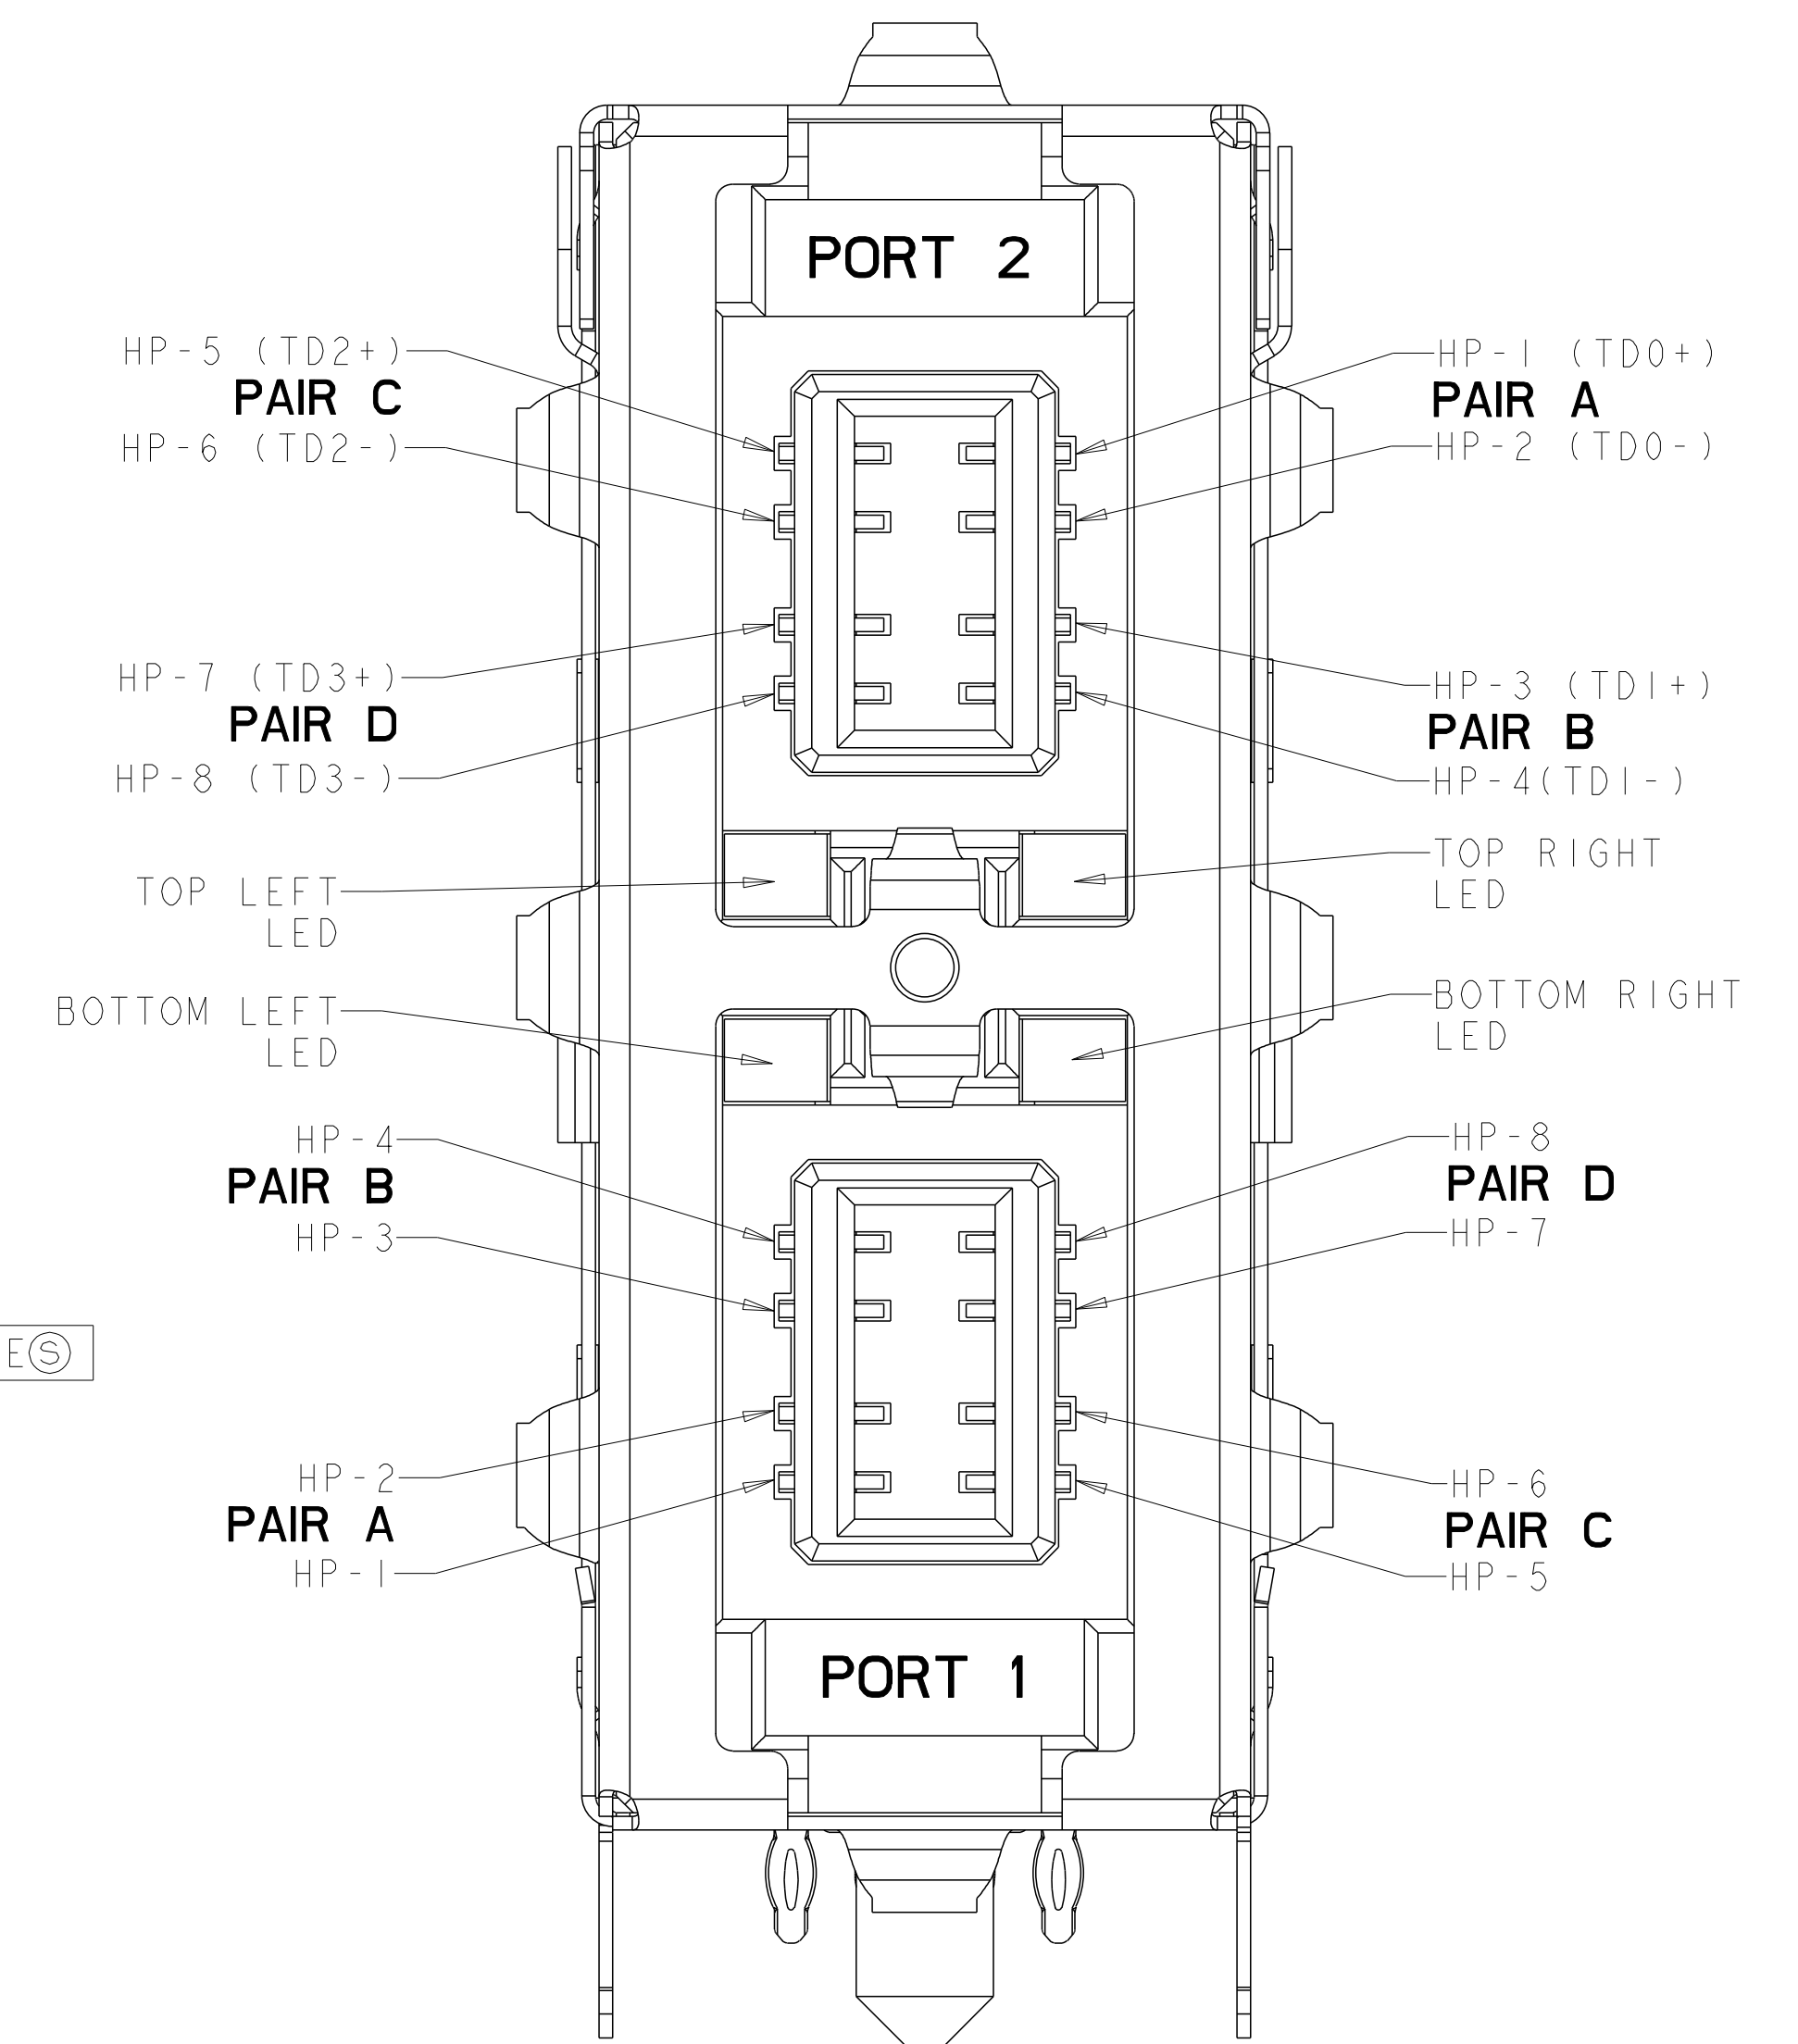


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. SHIRK CHK R. HENRY APR 04 2008 APR 04 2008	 TE Connectivity							
DIMENSIONS: mm 	TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±0.25 3 PLC ± 4 PLC ± ANGLES 42° FINISH - MATERIAL -	NAME RECEPTACLE ASSEMBLY, 2X1, NON MAGNETICS, RJ POINT FIVE -	SIZE A100779	CASE CODE C=2057131	DRAWING NO -	RESTRICTED TO -				
CUSTOMER DRAWING			SCALE	4:	SHEET	2	OF	4	REV	A


LOC	DIST	REVISIONS					
AG	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

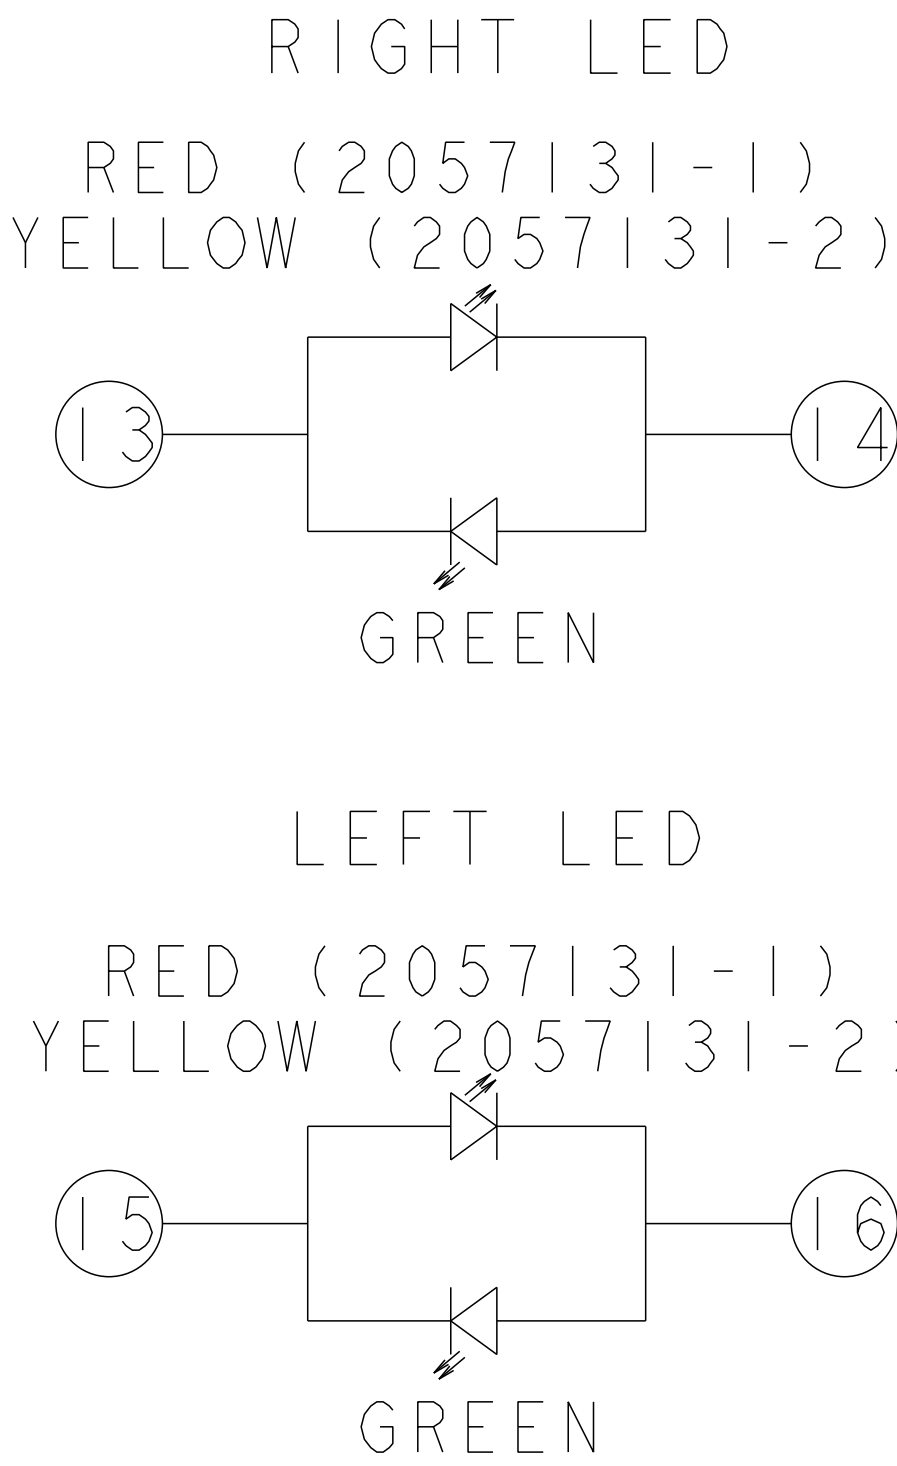


TOP PORT

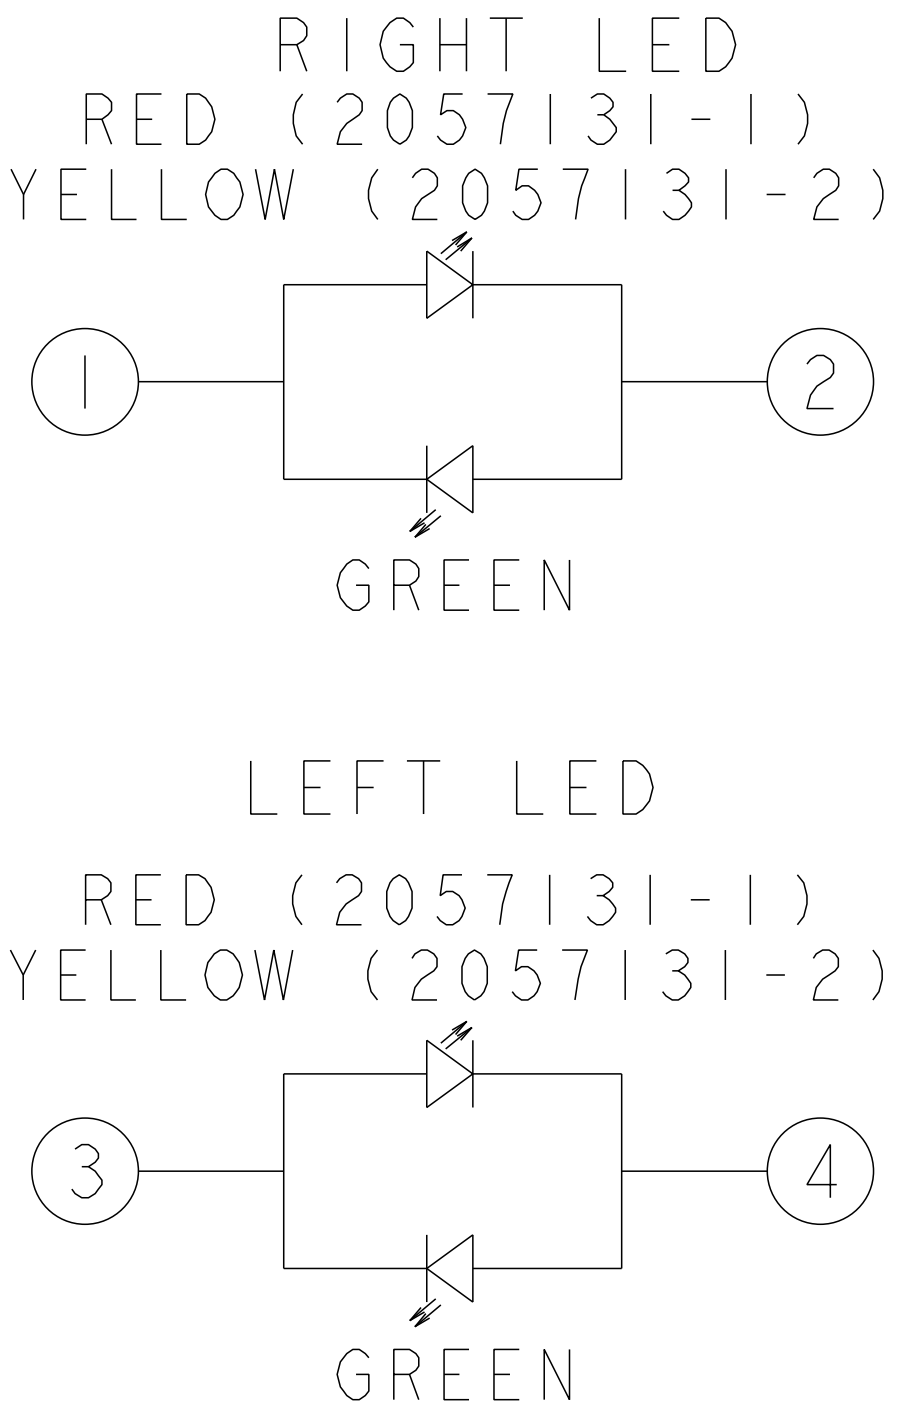


BOTTOM PORT

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN	M. SHIRK	04APR2008	 TE Connectivity	
				CWN	B. HENRY	04APR2008		
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	R. HENRY	04APR2008	NAME RECEPTACLE ASSEMBLY, 2X1, NON MAGNETICS, RJ POINT FIVE	
				PRODUCT SPEC				
		0 PLC ± 1 PLC ± 2 PLC ±0.25 3 PLC ± 4 PLC ± ANGLES ±2° FINISH		APPLICATION SPEC			SIZE A 1	
				WEIGHT				
MATERIAL				CUSTOMER DRAWING			SCALE 4:1	
							SHEET 3 OF 4	
							REV A	

LOC	DIST	REVISIONS					
AG	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			-	SEE SHEET I	-	-	-

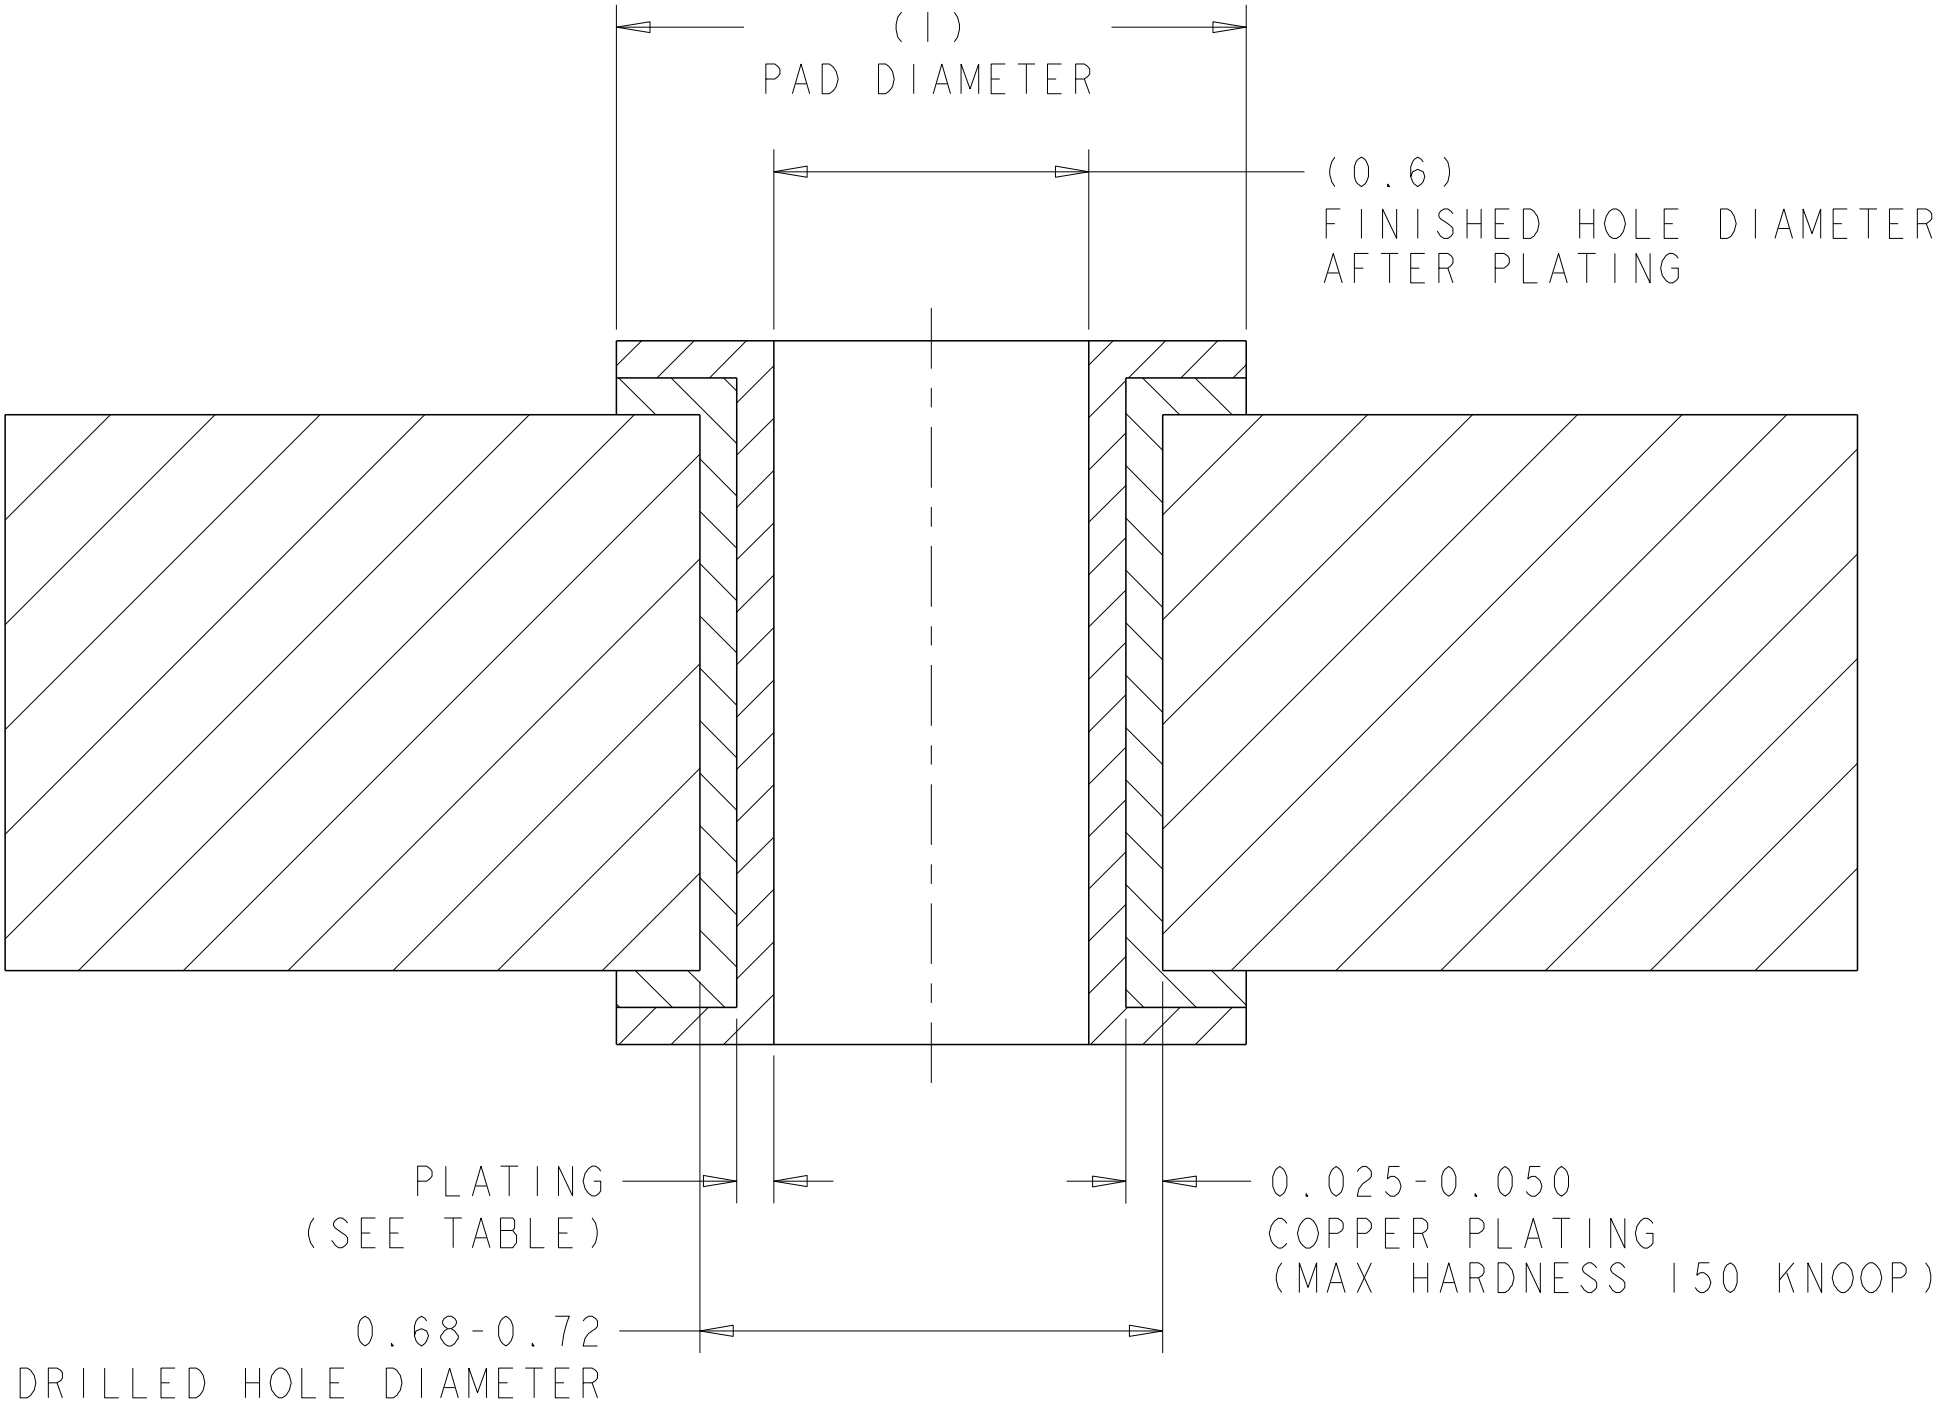

RECOMMENDED HOLE DIMENSIONS
FOR SIGNAL CONTACTS

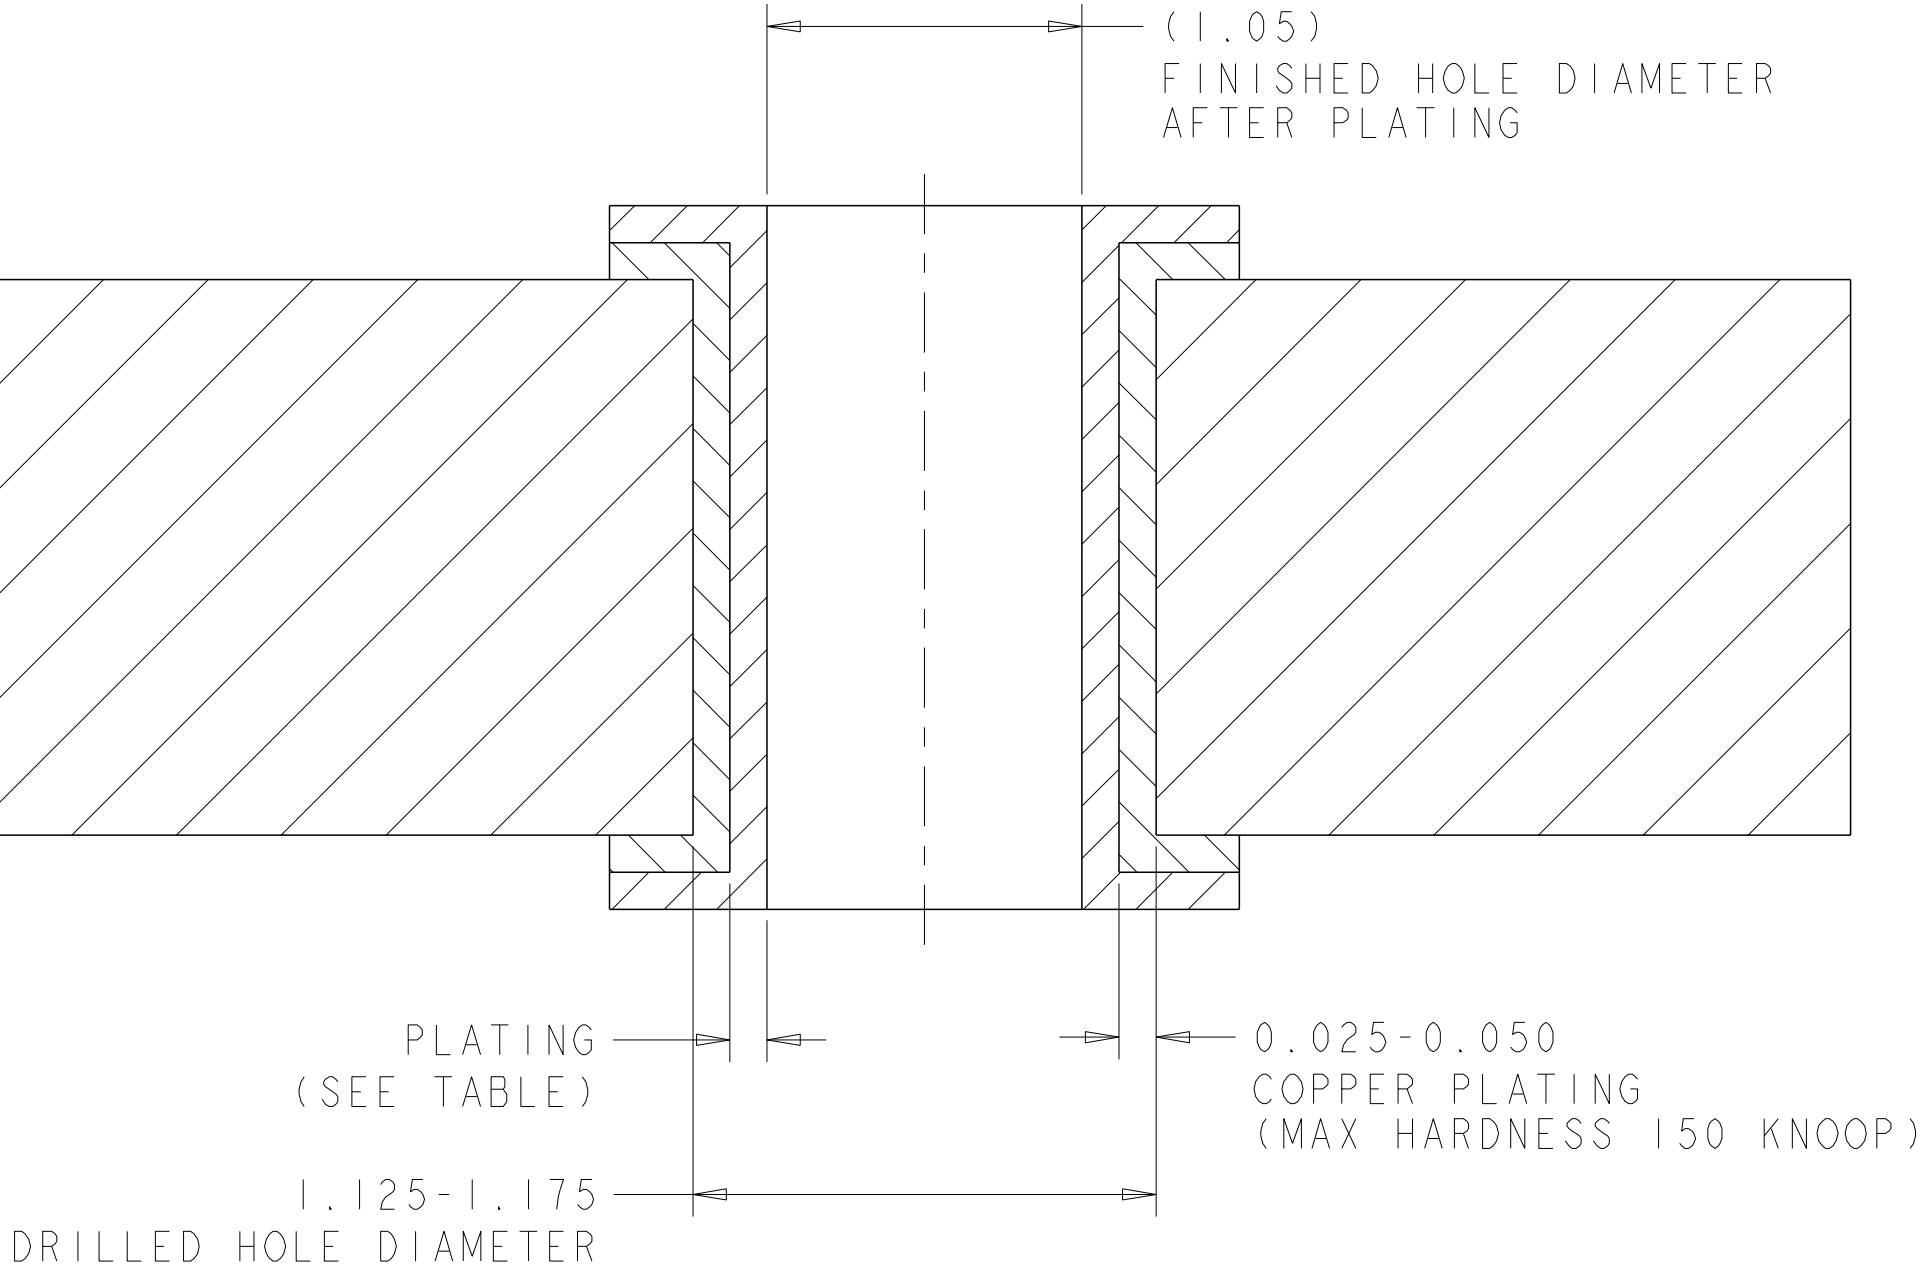

RECOMMENDED HOLE DIMENSIONS
FOR SHIELD PINS

THICKNESS	PLATING
0.004-0.010	HOT AIR SOLDER LEVELING (HASL) TIN-LEAD (Sn Pb)
0.0005-0.001	IMMERSION TIN (Sn)
0.0002-0.0005	ORGANIC SOLDERABILITY PRESERVATIVE (OSP)
0.0001-0.0005 Au, 0.004-0.0076 Ni	IMMERSION GOLD (Au) OVER NICKEL (Ni) (ENIG)
0.010-0.025	TIN LEAD PLATING (Sn Pb)
0.0001-0.00015	IMMERSION SILVER (Ag)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
M. SHIRK
04APR2008

CWR
R. HENRY
04APR2008

APVD
R. HENRY
04APR2008

TE Connectivity

NAME
RECEPTACLE ASSEMBLY,
2X1, NON MAGNETICS, RJ POINT FIVE

SIZE
A

CAGE CODE
100779

DRAWING NO.
2057131

RESTRICTED TO
-

DIMENSIONS:
mm

0 PLC
1 PLC
2 PLC
3 PLC
4 PLC
ANGLES
FINISH

±
±
±0.25
±
±
±2°
-

MATERIAL
-

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

CUSTOMER DRAWING

SCALE
4:1

SHEET
4

OF
4

REV
A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2057131-2](#)