




		1					
LOC	DIST	REVISIONS					
—	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	RELEASED PER ECO 08-023142	9-18-08	CT	DW

D

C

B

A

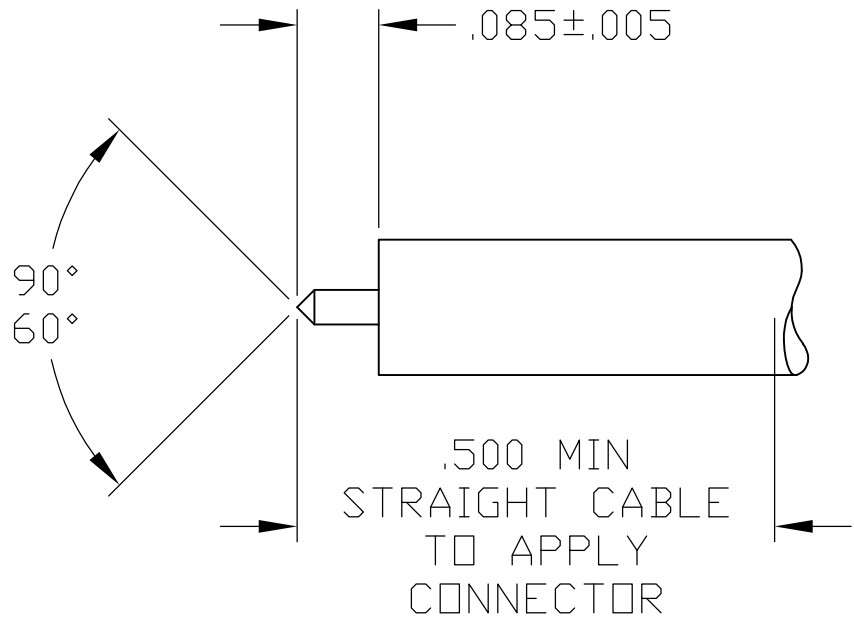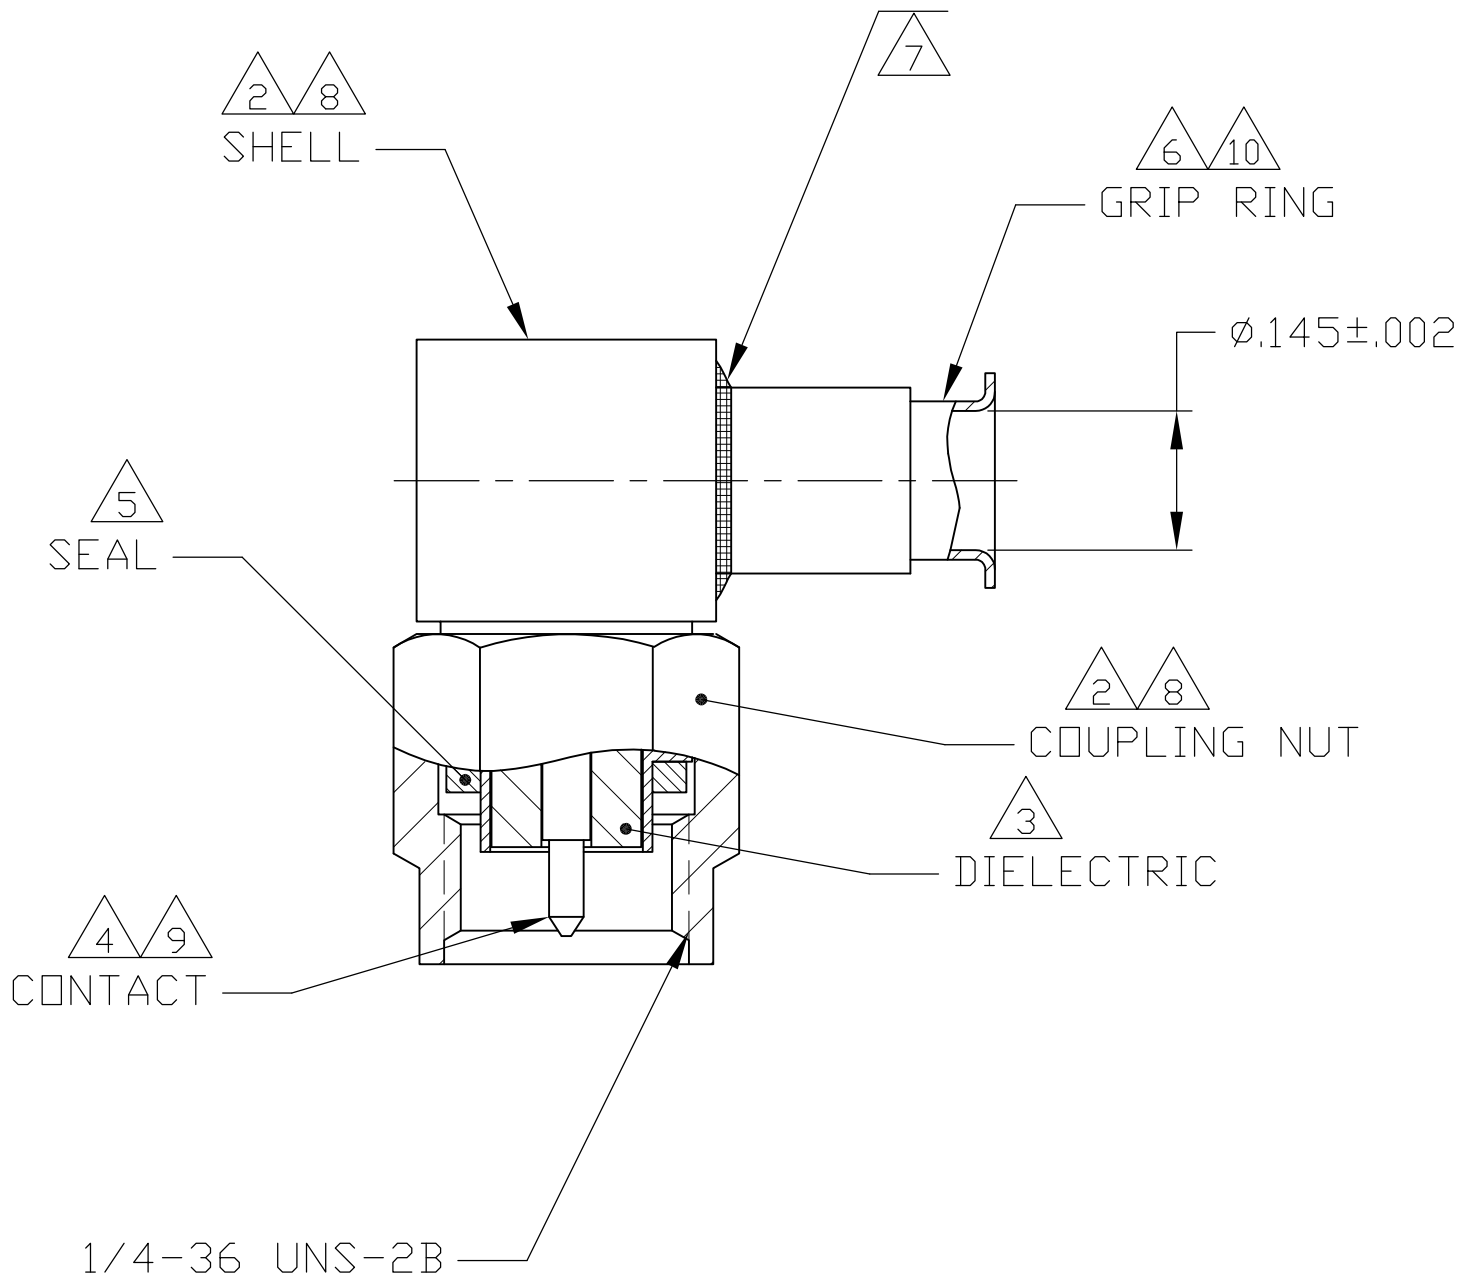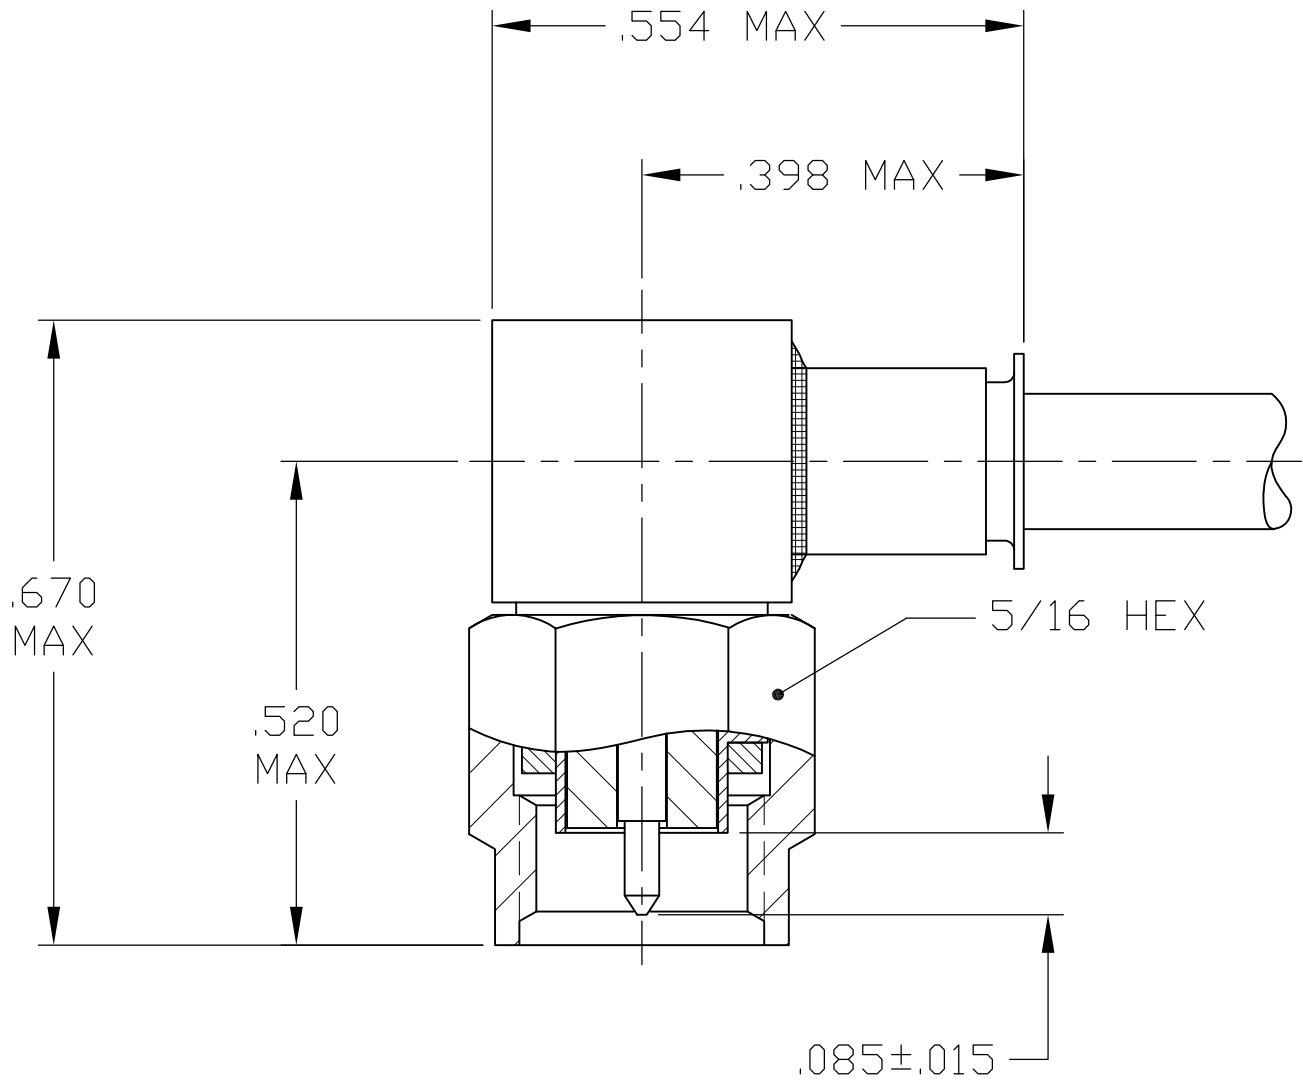

RECOMMENDED STRIP LENGTH

- FOR USE WITH RG-402/U CABLE, (.141 SEMI-RIGID).
- STAINLESS STEEL PER ASTM-A-582.
- PTFE PER MIL-P-19468.
- BERYLLIUM COPPER PER ASTM-B-196.
- SILICONE RUBBER PER ZZ-R-765.
- BRASS PER ASTM-B-16.
- SEALENT
- PASSIVATION PER SAE-AMS-2700.
- GOLD PL PER ASTM-B-488.
- NICKEL PL PER AMS-QQ-N-290.
- FREQUENCY RANGE: 0 - 26.5 GHZ.

D

C

B

A

1996407

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS 9-18-08	Tyco Electronics Corporation Harrisburg, Pa 17105-3608			
DIMENSIONS: INCHES		CHK D.WILSON 9-18-08				
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D.WILSON 9-18-08	NAME		
	0 PLC ± -		PRODUCT SPEC	PLUG,RIGHT ANGLE, WEATHERPROOF,SERIES SMA		
	1 PLC ± -		APPLICATION SPEC			
	2 PLC ± -		—	SIZE		
MATERIAL		FINISH	WEIGHT	CAGE CODE		DRAWING NO
NOTE 2 THRU 7		NOTE 8 THRU 10	—	A2 00779		RESTRICTED TO
CUSTOMER DRAWING			SCALE	5:1		REV
			SHEET	1 OF 1		A

1996407-1
PART NUMBER

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1996407-1](#)