


THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
B	Updated Pin Out, Notes and Graphics	04-25-14	LY

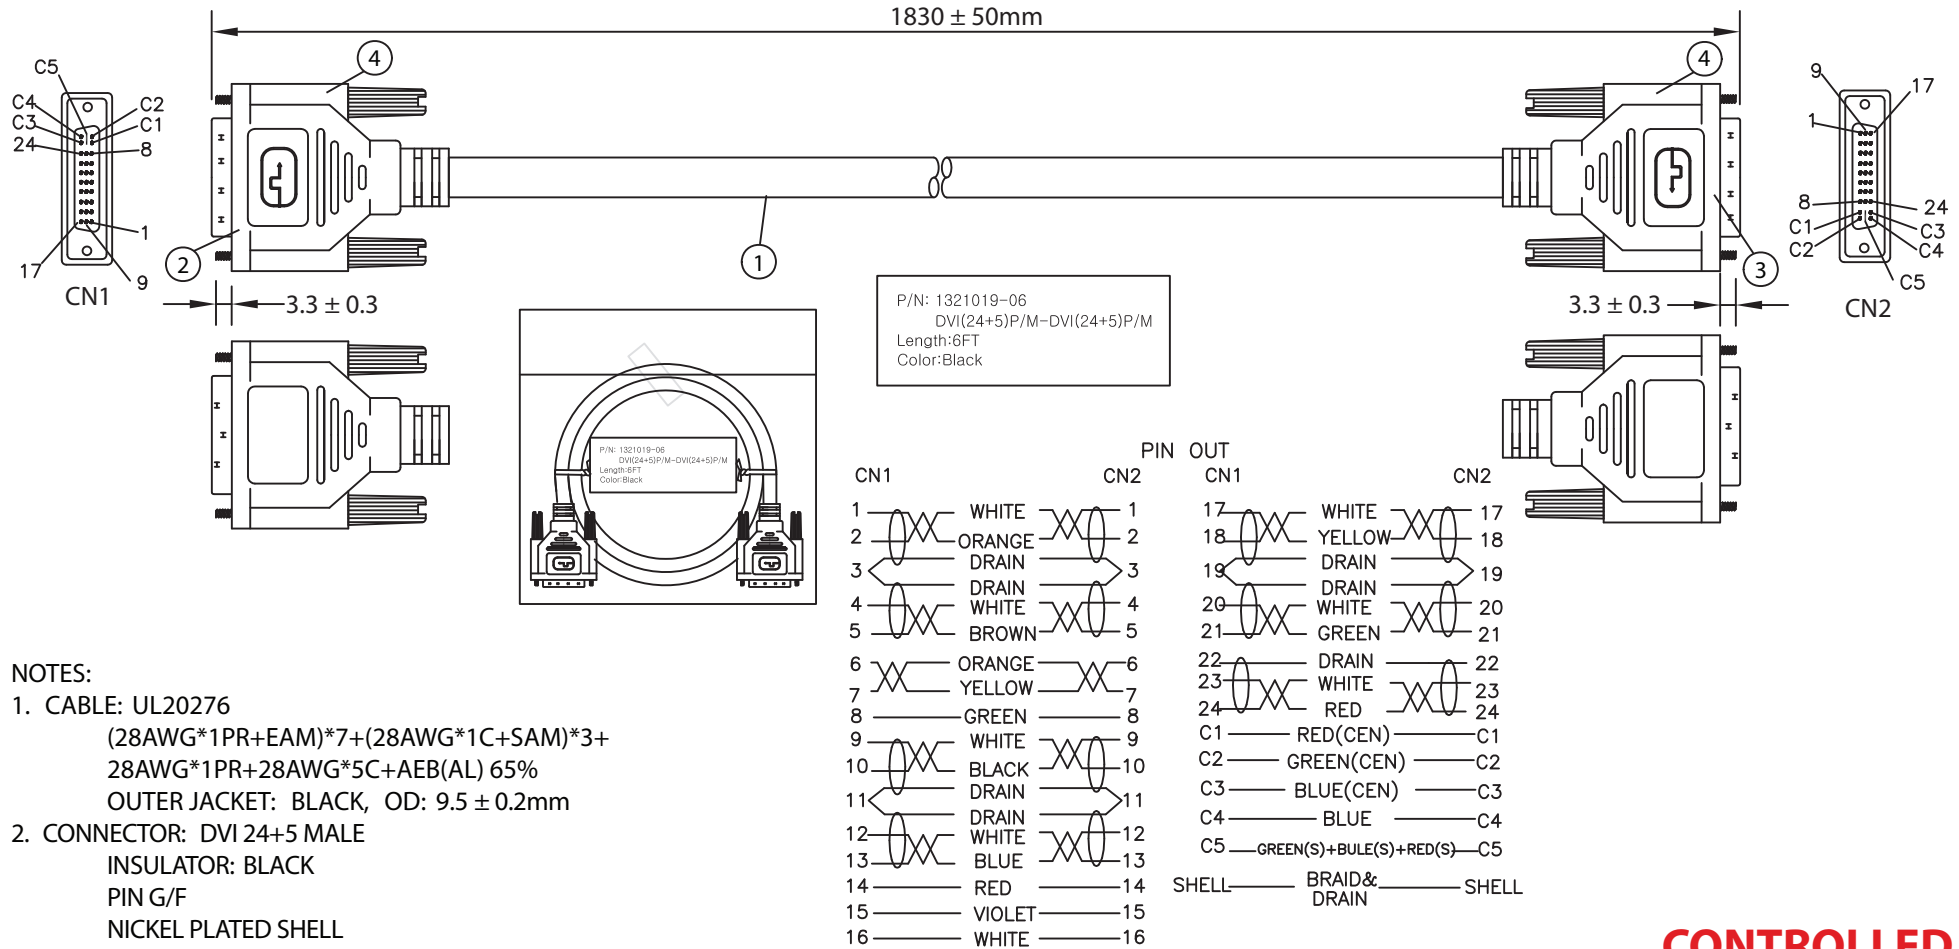

NOTES:

- CABLE: UL20276**
(28AWG*1PR+EAM)*7+(28AWG*1C+SAM)*3+
28AWG*1PR+28AWG*5C+AEB(AL) 65%
OUTER JACKET: BLACK, OD: 9.5 ± 0.2mm
- CONNECTOR: DVI 24+5 MALE**
INSULATOR: BLACK
PIN G/F
NICKEL PLATED SHELL
THUMB SCREW: E4*28.5mm #4-40UNC
- CONNECTOR: DVI 24+5 MALE**
INSULATOR: BLACK
PIN G/F
NICKEL PLATED SHELL
THUMB SCREW: E4*28.5mm #4-40UNC
- PVC MOLDED: COLOR V398 45P BLACK**
- ELECTRICAL TEST:**
<1>.100% OPEN SHORT & MISS WIRE TEST
<2>.INSULATION RESISTANCE: AC300V DC400V 10M ohm MIN.
<3>.CONDUCTOR RESISTANCE: 3 ohm MAX.
- PACKING: 1PC/POLYBAG**

CONTROLLED

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp. WCI DIVISION		
		Part Number:	1321019-06	RoHS Compliant
0-1	0.15	Description: DVI (24+5)P/M - DVI (24+5)P/M		
1-6	0.20			
6-18	0.30			
18-50	0.50			
50-120	0.70			
120-250	0.90	UNIT: mm	REV. B	
250-500	1.20	Drawn / Date	Checked / Date	Approved / Date
		B.Grubb 01-03-07	01-03-07	JJH / 01-03-07

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Qualtek:](#)

[1321019-06](#)