

■ Features :

- Universal AC input / Full range (up to 305VAC)
- Built-in active PFC function
- Protections: Short circuit / Over current / Over voltage / Over temperature
- OCP point adjustable through output cable or internal potentiometer
- IP67/IP65 design for indoor or outdoor installations
- Suitable for dry / damp / wet locations
- 5 years warranty, Tc70°C 40000hrs

 IP65 IP67 

HBG-240-60	A	Blank : IP67 rated. Cable for I/O connection.
		A : IP65 rated. Output constant current level can be adjusted through internal potentiometer.
		B : IP67 rated. output constant current lever can be adjusted through output cable with 1-10V,PWM signal and Resistance


SPECIFICATION

MODEL	HBG-240-24	HBG-240-36	HBG-240-48	HBG-240-60		
OUTPUT	DC VOLTAGE	24V	36V	48V		
	CONSTANT CURRENT REGION Note.4	14.4 ~ 24V	21.6 ~ 36V	28.8 ~ 48V		
	RATED CURRENT	10A	6.7A	5A		
	RATED POWER	240W	240W	240W		
	RIPPLE & NOISE (max.) Note.2	150mVp-p	250mVp-p	250mVp-p		
	CURRENT ADJ. RANGE	Can be adjusted by internal potentiometer A type only				
		6 ~ 10A	4.0 ~ 6.7A	3 ~ 5A		
	VOLTAGE TOLERANCE Note.3	±1.0%	±1.0%	±1.0%		
	LINE REGULATION	±0.5%	±0.5%	±0.5%		
	LOAD REGULATION Note.3	±0.5%	±0.5%	±0.5%		
INPUT	SETUP, RISE TIME Note.7	2500ms,120ms at full load	230VAC /115VAC			
	HOLD UP TIME (Typ.)	15ms at full load	230VAC /115VAC			
	VOLTAGE RANGE Note.5	90 ~ 305VAC	127 ~ 431VDC			
	FREQUENCY RANGE	47 ~ 63Hz				
	POWER FACTOR (Typ.)	PF>0.98/115VAC, PF>0.95/230VAC, PF>0.93/277VAC at full load (Please refer to "Power Factor Characteristic" curve)				
	EFFICIENCY (Typ.)	92.5%	92.5%	93%		
	AC CURRENT (Typ.)	2.5A / 115VAC	1.3A / 230VAC	1.2A / 277VAC		
PROTECTION	MAX.LED DRIVE NUMBER ON MCB C TYPE 16A	8units@230VAC				
	INRUSH CURRENT (Typ.)	COLD START 75A(twidth=680μs measured at 50% Ipeak) at 230VAC				
	LEAKAGE CURRENT	<0.75mA / 277VAC				
	OVER CURRENT Note.4	95 ~ 108%	Protection type : Constant current limiting, recovers automatically after fault condition is removed			
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed.				
ENVIRONMENT	OVER VOLTAGE	27 ~ 34V	43 ~ 50V	52 ~ 63V		
		Protection type : Shut down and latch off o/p voltage, re-power on to recover				
	OVER TEMPERATURE	95°C±5°C (TSW1)	Protection type : Shut down o/p voltage, recovers automatically after temperature goes down			
	SURGE RESISTANCE	L/N-FG:6KV; L-N:2KV				
SAFETY & EMC	WORKING TEMP.	-40 ~ +70°C (Refer to "Derating Curve")				
	WORKING HUMIDITY	20 ~ 95% RH non-condensing				
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH				
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)				
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes				
OTHERS	SAFETY STANDARDS	Design refer to EN61347-2-13,UL8750				
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC	I/P-FG:2.0KVAC	O/P-FG:0.5KVAC		
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms	500VDC / 25°C / 70% RH			
	EMC EMISSION	Compliance to EN55015, EN55022 (CISPR22) Class B, EN61000-3-2 Class C (≥75% load) ; EN61000-3-3				
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, light industry level (surge 4KV), criteria A				
NOTE	MTBF	190.7Khrs min. MIL-HDBK-217F (25°C)				
	DIMENSION	Refer to mechanical specification				
	PACKING	2.1Kg; 8pcs/17.8Kg/1.5CUFT				
1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. Constant current operation region is within 60% ~100% rated output voltage. This is the suitable operation region for LED related applications, but please reconfirm special electrical requirements for some specific system design. 5. Derating may be needed under low input voltages. Please check the static characteristics for more details. 6. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. 7. Length of set up time is measured at first cold start. Turning ON/OFF the power supply may lead to increase of the set up time. 8. L/N-FG:6KV is only for one time at each angle.						

■ Mechanical Specification


Case No. 213 Unit:mm

Blank:(HBG-240)

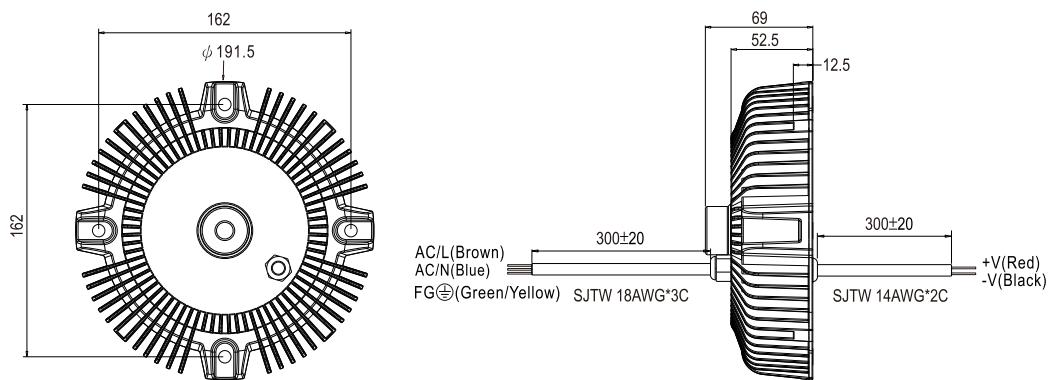


※IP67 rated. Cable for I/O connection.

A type:(HBG-240_A)

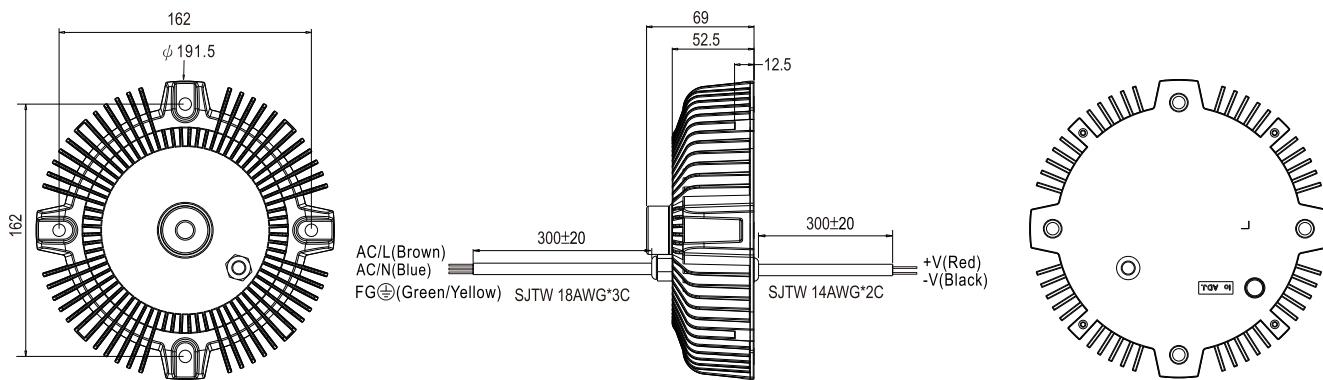

※IP65 rated. Output constant current level can be adjusted through internal potentiometer.

B type:(HBG-240_B)

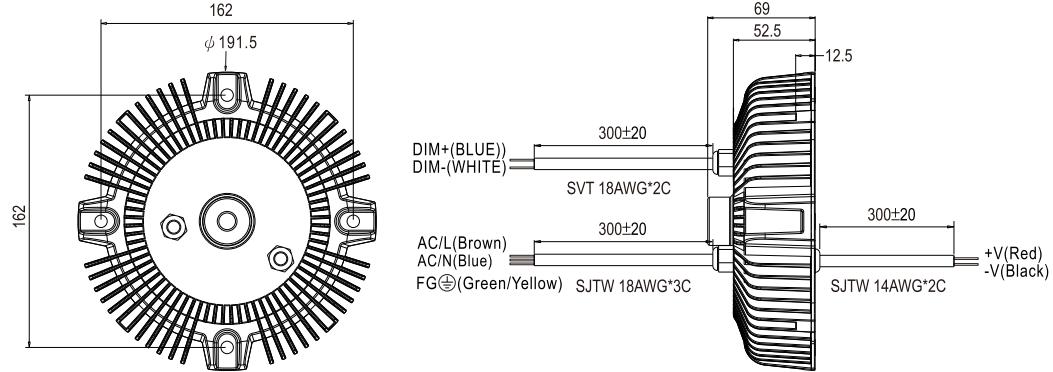

※IP67 rated. output constant current lever can be adjusted through output cable with 1-10V,PWM signal and Resistance

DIMMING OPERATION

※ Built-in 3 in 1 dimming function, IP67 rated. Output constant current level can be adjusted through output cable by connecting a resistance or 1 ~ 10Vdc or 10V PWM signal between DIM+ and DIM-.

※ Please DO NOT connect "DIM-" to "-V".

※ Reference resistance value for output current adjustment (Typical)

Resistance value	Single driver	10KΩ	20KΩ	30KΩ	40KΩ	50KΩ	60KΩ	70KΩ	80KΩ	90KΩ	100KΩ	OPEN
	Multiple drivers (N=driver quantity for synchronized dimming operation)	10KΩ/N	20KΩ/N	30KΩ/N	40KΩ/N	50KΩ/N	60KΩ/N	70KΩ/N	80KΩ/N	90KΩ/N	100KΩ/N	-----
Percentage of rated current		10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

※ 1 ~ 10V dimming function for output current adjustment (Typical)

Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%


※ 10V PWM signal for output current adjustment (Typical): Frequency range :100Hz ~ 3KHz

Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%


※ Using the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.

※ Direct connecting to LEDs is suggested, but is not suitable for using additional drivers.


Block Diagram

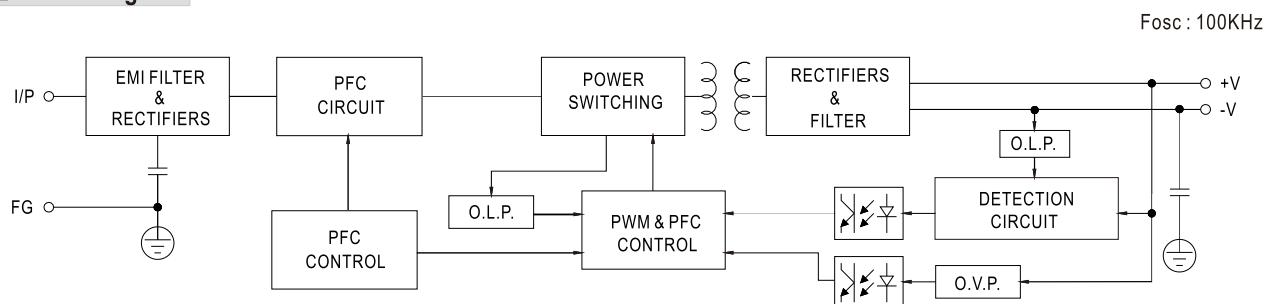


Derating Curve

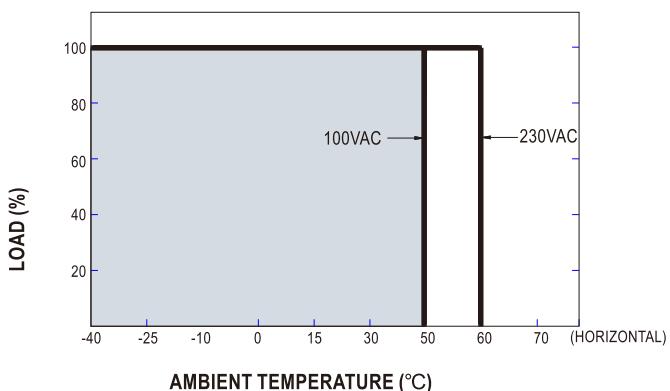

Static Characteristics

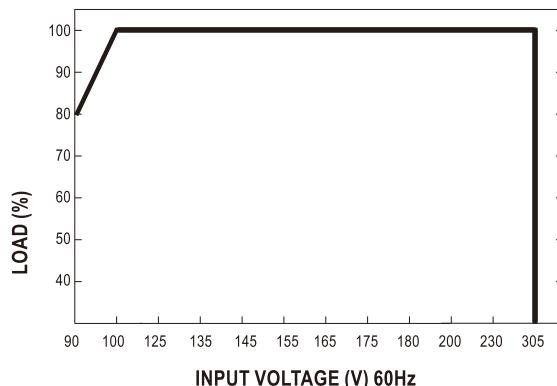


■ Power Factor Characteristic

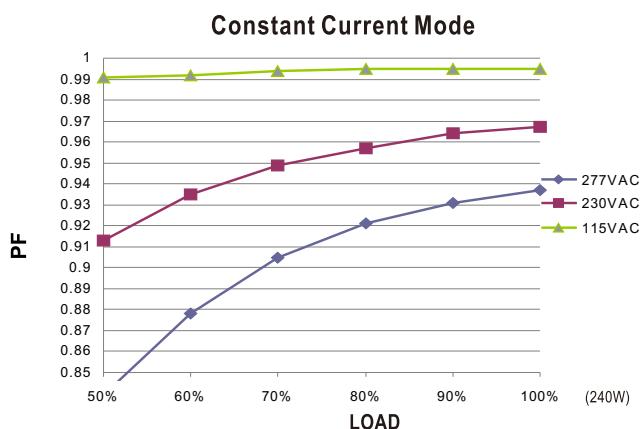

■ EFFICIENCY vs LOAD (48V Model)

HBG-240 series possess superior working efficiency that up to 93% can be reached in field applications.

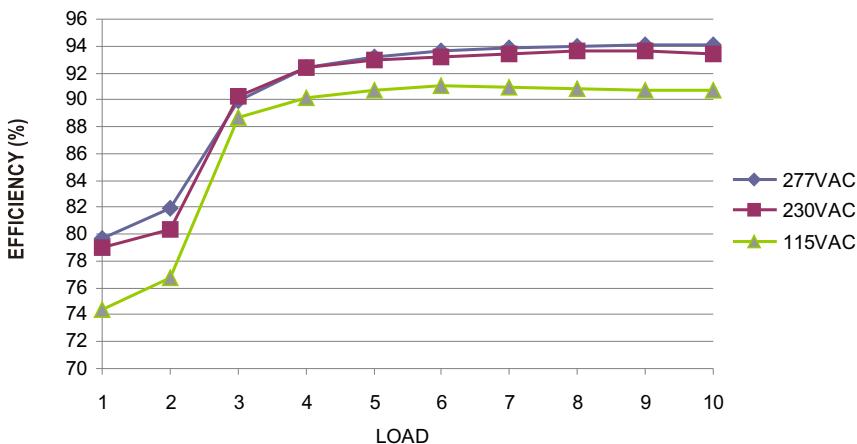


■ DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.

Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).

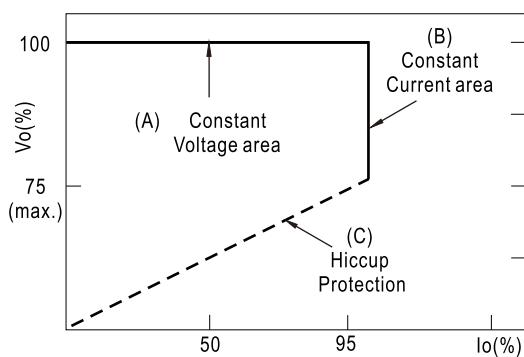

Typical LED power supply I-V curve

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

MEAN WELL:

[HBG-240-60](#) [HBG-240-48B](#) [HBG-240-24](#) [HBG-240-24A](#) [HBG-240-36A](#) [HBG-240-36B](#) [HBG-240-60B](#) [HBG-240-48A](#) [HBG-240-36](#) [HBG-240-48](#) [HBG-240-24B](#) [HBG-240-60A](#)