


REV. 0
DCO 142096

COIL: @ 25°C	
RESISTANCE	63 OHMS ± 10%
NOMINAL VOLTAGE	5.0 VDC
MUST OPERATE	3.0 VDC
TURN ON BASE CURRENT	0.60 mADC
MUST RELEASE	1.7 VDC MAX, 0.24 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 3000 CPS @ 30 g's
SHOCK	75 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES:	
TURN-ON TIME	2.0 MS MAX
TURN-OFF TIME	7.5 MS MAX
CONTACT STABILIZATION TIME	2.0 MS MAX

CUSTOMER DATA SHEET

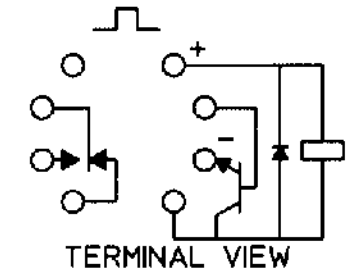

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 9/29/98 *EK/ERBY 6/13/00*

COMMUNICATIONS INSTRUMENTS, INC.

J1MACT-5XP

CUST. QPL
CUST. NO. M28776/5-025P REV. _____ J1MAT RELAY

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[J1MACT-5XP](#)