

83123 Spherical cover 831230 Part number made to order


- IP 66 protection
- Compact dimensions

Part numbers

Type	Function	Connections
MADE TO ORDER Spherical cover 831230	I (changeover)	A05 VVF cable

Specifications
Electrical characteristics

Rating nominal / 250 VAC (A)	5
Rating thermal / 250 VAC (A)	12

Mechanical characteristics

Maximum operating force (N)	7,5
Min. Release force (N)	1,5
Maximum total travel force (N)	8
Max. permitted overtravel force (N)	30
Operating position (mm)	16,5 [±] 0,5
Maximum differential travel (mm)	0,25
Min. overtravel (mm)	0,2
Ambient operating temperature (°C)	0 → +85
Mechanical life (operations)	2 x 10 ⁶
Contact gap (mm)	0,5
Weight (g)	50

Connections

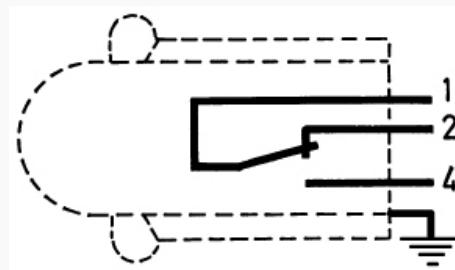
Connection	Cable 3 x 0.75 mm ² in sheath Ø ext. 7.6 mm max. Standard length 0.50 m
------------	---

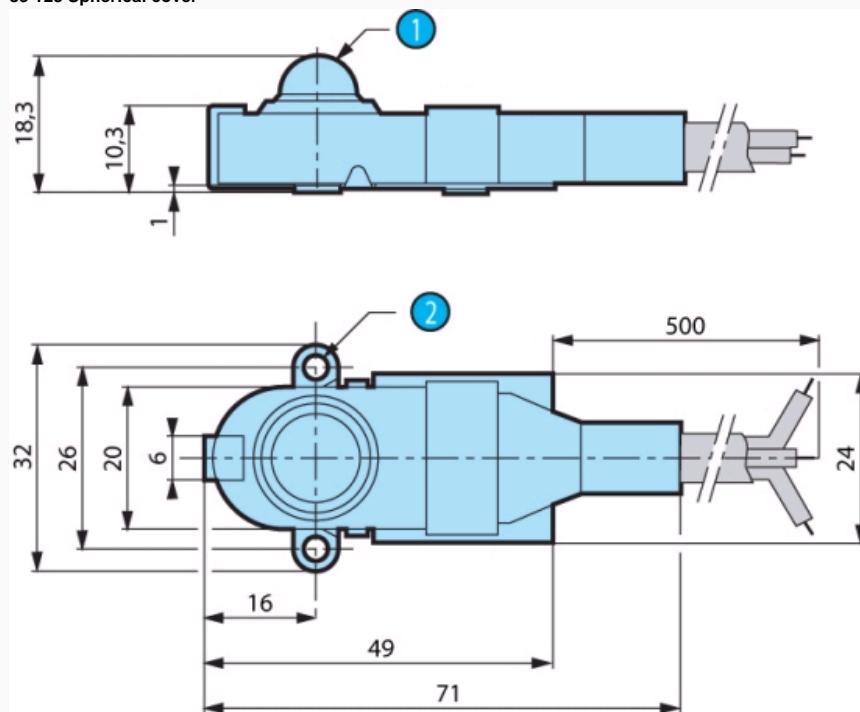
Comments

Common (1) : black
 Normally closed (2) : brown
 Normally open (4) : grey

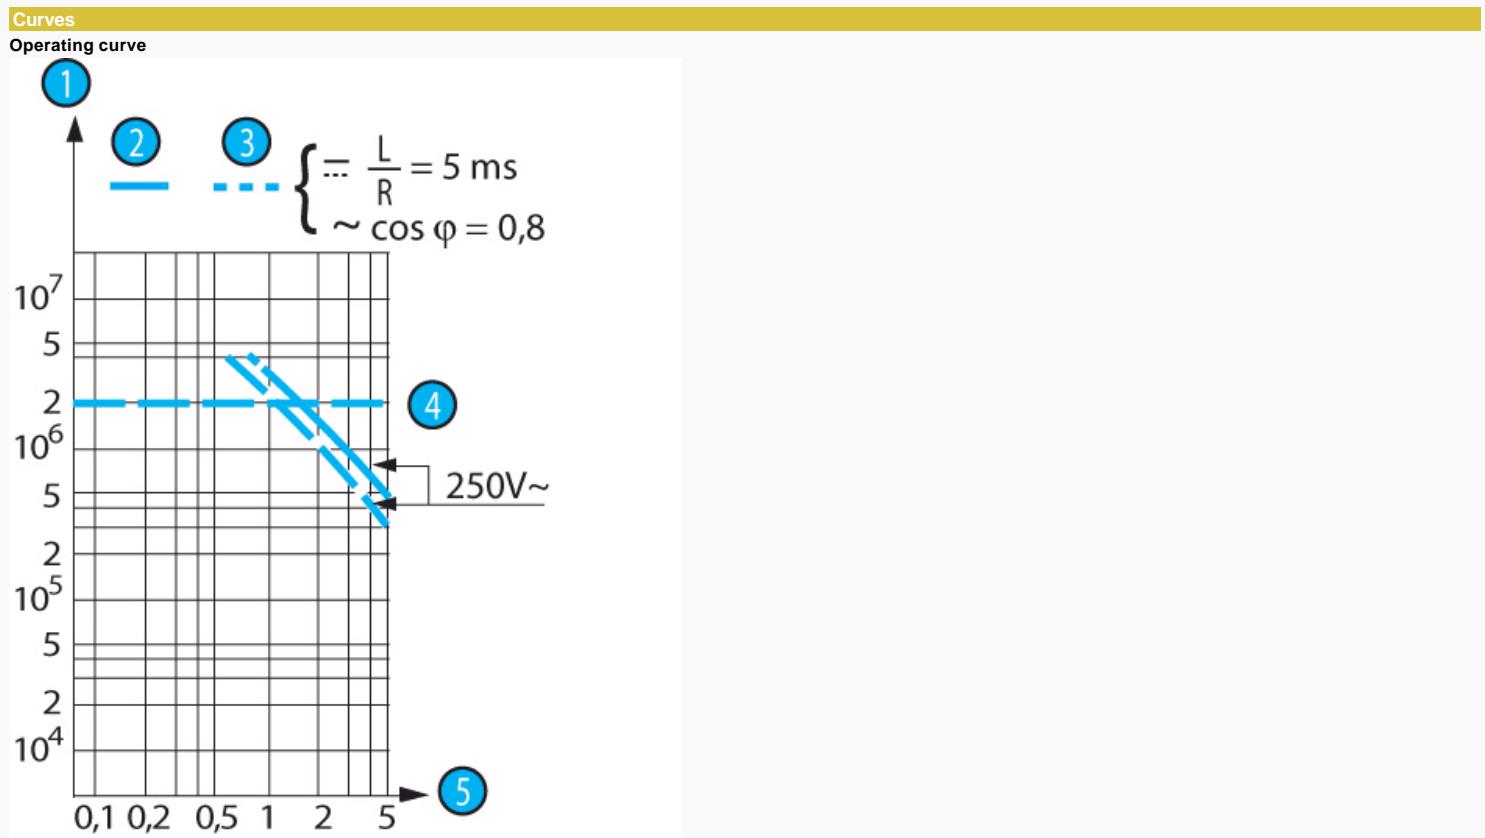
Additional specifications
Components
Material

- Casing : nitrile
- Contacts : silver
- Contact holder : polyamide
- Mounting plate : passivated mild steel (zinc)

Principles

Dimensions (mm)
Product



Nº	Legend
1	R6 spherical
2	2 holes Ø 3.2



Nº	Legend
1	Number of cycles

1	Resistive circuit
2	Inductive circuit
3	Mechanical life limit
4	Current in Amps

Other information**Mounting - Operation**

In order to comply with basic safety requirements, an insulator must be used if the device is being operated manually.
One of the fixing holes must be used as a protective earth.

Product adaptations

- Special casing, leads, cables for specific environment

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Crouzet:

[83123069.RB](#) [83123070.RB](#)