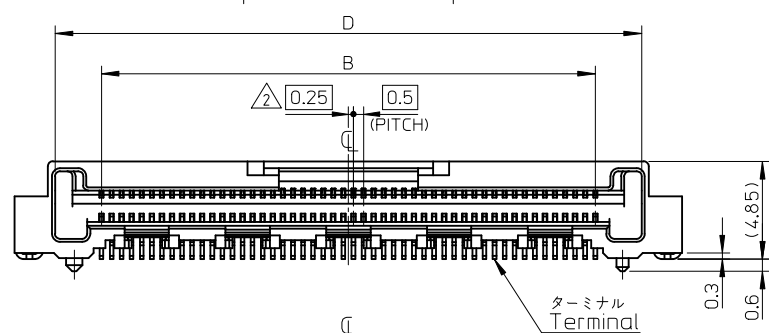
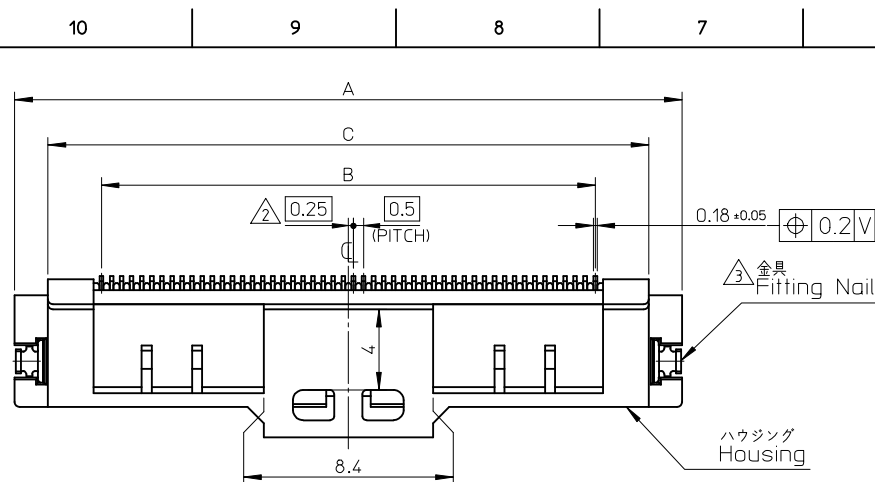


注 記 1. 使用材料 NOTE MATERIAL




ハウジング
HOUSING

ターミナル
TERMINAL

金具
FITTING NAIL

：液晶ポリマー（LCP）、ガラス充填、
UL94V-0 色：黒色
LIQUID CRYSTAL POLYMER(LCP)
GLASS FILLED,UL94V-0 COLOR:BLACK
：銅合金(τ=0.18)
ニッケル下地 錫ビスマスメッキ
COPPER ALLOY(τ=0.18)
Sn-Bi PLATING OVER NICKEL PLATING.
：銅合金(τ=0.25)
ニッケル下地 錫メッキ
COPPER ALLOY(τ=0.25)
TIN OVER NICKEL PLATING.

- △ N=偶数に通用 (N:極数)
APPLY FOR N-EVEN(CIRCUIT)
- △ パターン剥離止め用金具
FITTING NAIL FOR PREVENTION OF PEELING OF P.C.B PATERN.
- △ 適合ジャケット:501783-**09
製品詳細寸法はSD-501783-001を参照下さい。
APPLICABLE JACKET:501783-**09.RE DETAILED DIMENSION.SEE SD-501783-001.
- △ 適合ジャケットカバー:501784-**09
製品詳細寸法はSD-501784-001を参照下さい。
APPLICABLE JACKET:501784-**09.RE DETAILED DIMENSION.SEE SD-501784-001.

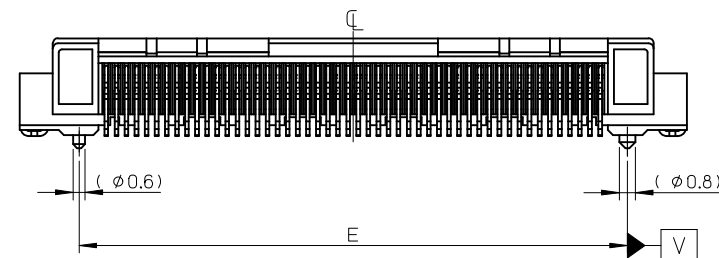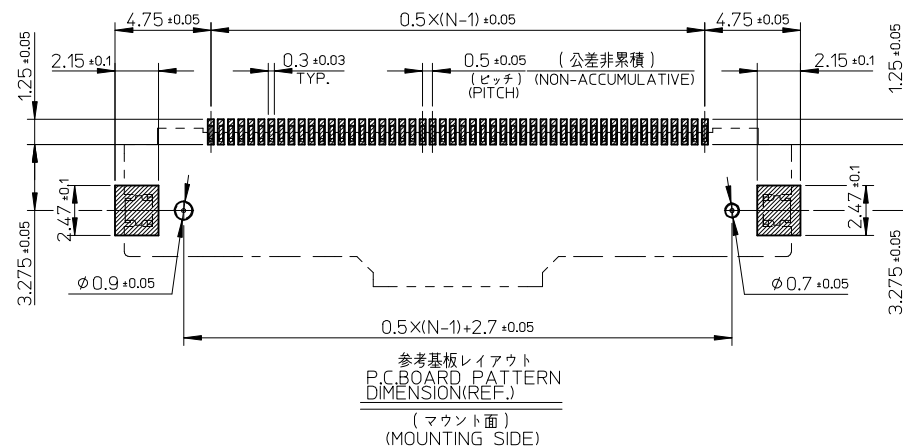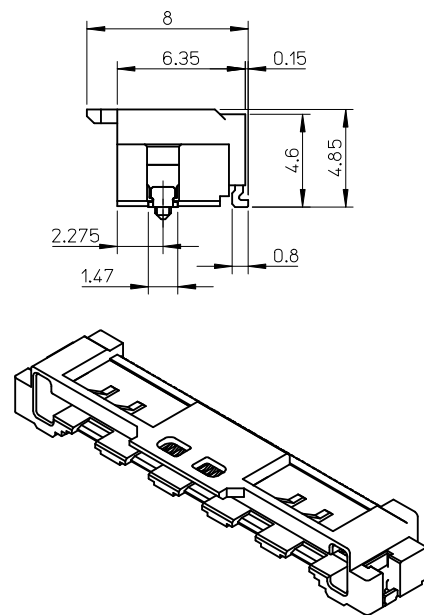

27.2	29.1	29.8	24.5	33.1	501864-5021	50
22.2	24.1	24.8	19.5	28.1	501864-4021	40
E	D	C	B	A	MATERIAL NO.	極 数

REVISED EC NO: J2013-0731 2012/08/02 DRWN:KNAGUMO 2012/08/03 CHKD:K.TAKAHASHI 2013/01/07 APPR:KMORI KAWA	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± 0.2	H. IJIMA	DATE 06/01/13	TITLE 0.5 FFC TO BOARD CONN REC. HSG ASSY(RA)				
		10 OVER 30 UNDER	± 0.25	K. TAKAHASHI	DATE 06/01/13					
		30 OVER	± 0.3	H. HIRATA	DATE 06/01/13	molex				
		ANGULAR ±1 °		MATERIAL NO. 501864-**-21						
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

10 9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

F


E

D





C

B



A

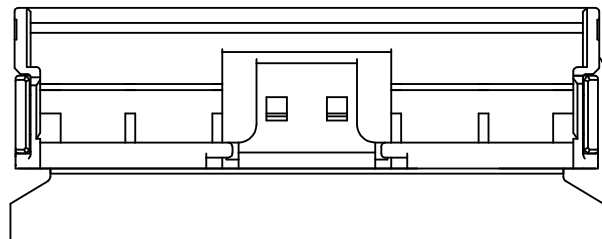

△ジャケット
JACKET

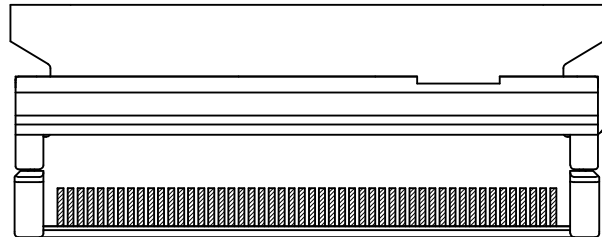

△ジャケットカバー
JACKET COVER

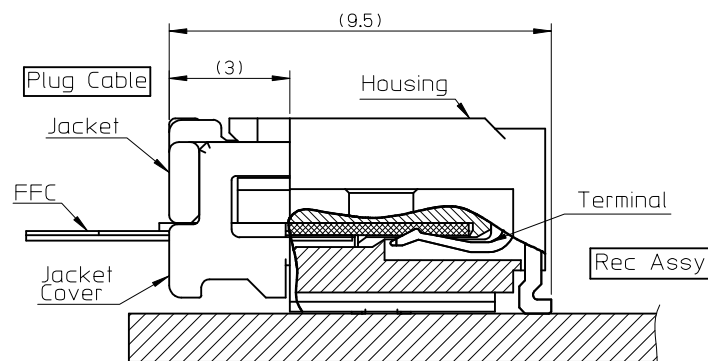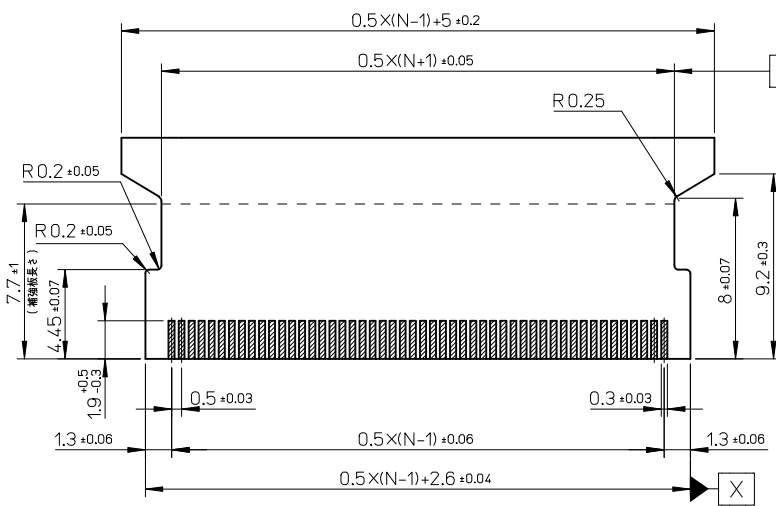

嵌合断面図

コネクタ接続部

適合FFC寸法
APPLICABLE FFC
RECOMMENDED DIMENSION
(仕上がり厚さ: 接続部0.3±0.03)

SEE SHEET 1 OF 2 EC NO.: 2013-0731 DRAWN: KAGUMO CHKD: TAKAHASHI APPR: KMORI KAWA 2012/08/02 2012/08/03 2013/01/07	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	±0.2	DRAWN BY H. IJIMA	DATE 06/01/13	TITLE 0.5 FFC TO BOARD CONN REC. HSG ASSY(RA)				
		10 OVER 30 UNDER	±0.25	CHECKED BY K. TAKAHASHI	DATE 06/01/13					
		30 OVER	±0.3	APPROVED BY H. HIRATA	DATE 06/01/13					
	ANGULAR ±1 °		MATERIAL NO. 501864-**21		DOCUMENT NO. SD-501864-004			SHEET NO. 2 OF 2		
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
	REV	molex								

10

9

8

7

6

5

4



3

2


1

NOTES


1. 極包数量 : 900 個/リール
NUMBER OF CONNECTORS:900 PCS/REEL
2. リードテープ長さ
LEAD TAPE LENGTH

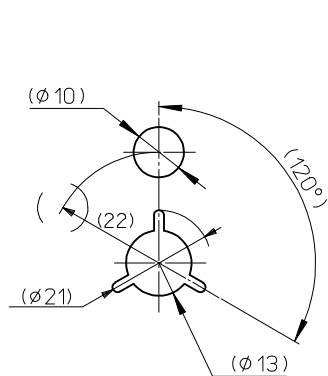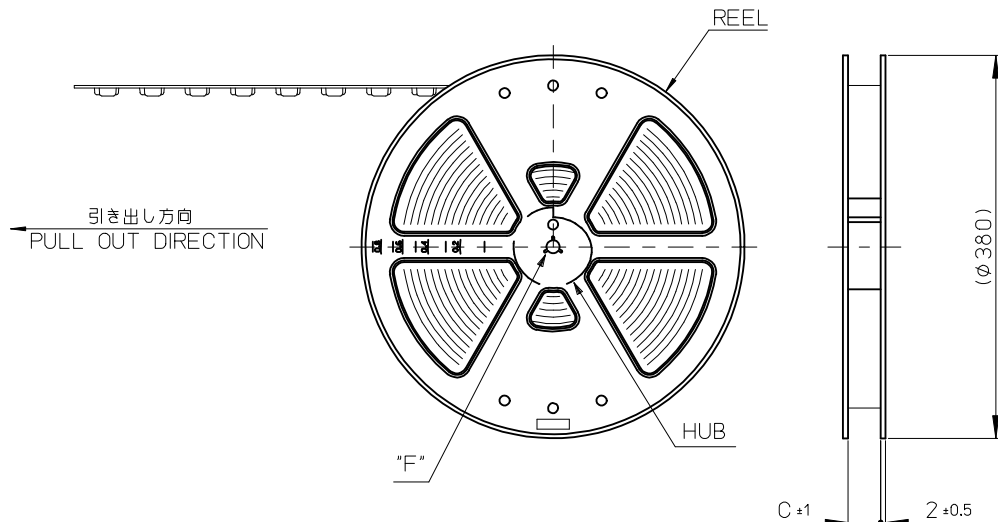


DETAIL "F"



引き出し方向
PULL OUT DIRECTION

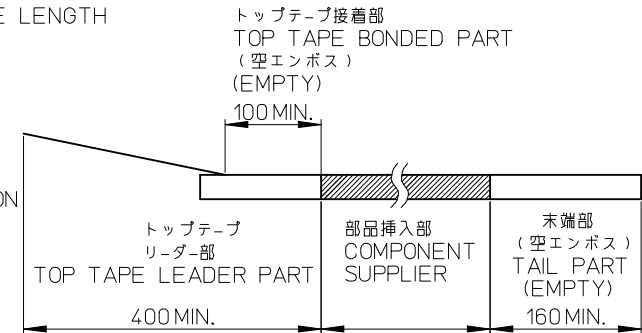

3. トップテープの剥離強度 : 0.1~1.27N(10~130gf)
(剥離方向は下図参照)
剥離速度 : 300mm/MIN. (参考)
PEEL-OFF FORCE OF TOP TAPE : 0.1~1.27N(10~130gf)
(PEELING DIRECTION AS SHOWN IN FOLLOWINGFIG.)

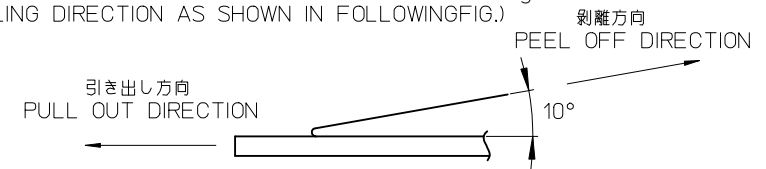

4. 製品詳細寸法については図面 SD-501864-004を参照下さい。
RE DETAILED DIMENSION, SEE SD-501864-004.
5. 材料(MATERIAL)
キャリアテープ(CARRIER TAPE) : ポリスチレン(POLYSTYRENE)
トップテープ(TOP TAPE) : PET, PE, PE
リール(REEL) : ポリスチレン(POLYSTYRENE)

501864-**80 MODEL NO.

REVISED EC NO.: J2013-0731 DWG:KINAGUMO CHKD:K.TAKAHASHI APPR:K.MORI/KAWA	2012/08/02 2012/08/03 2013/01/07	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
			10 UNDER	±0.2	DRAWN BY H.IIJIMA	DATE 06/01/17	TITLE EMBSTP PKG FOR 0.5 FFC TO BOARD CONN RA TYPE molex				
			10 OVER 30 UNDER	±0.25	CHECKED BY K.TAKAHASHI	DATE 06/01/17					
			30 OVER	±0.3	APPROVED BY H.HIRATA	DATE 06/01/17					
			ANGULAR ±1°		MATERIAL NO. 501864-**80		DOCUMENT NO. SD-501864-005		SHEET NO. 1 OF 2		
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

9

8

7

6

5

4

3

2

